


YFF SERIES

070



- ★ 三层高分子涂漆，
隔绝灰尘更耐高温。
- ★ 高端滚珠轴承，
减少摩擦提升传动效率。
- ★ 优质合金钢精密磨齿，
提高啮合精度保证品质。

CHINA•YANFENG
GROUP CO.,LTD.

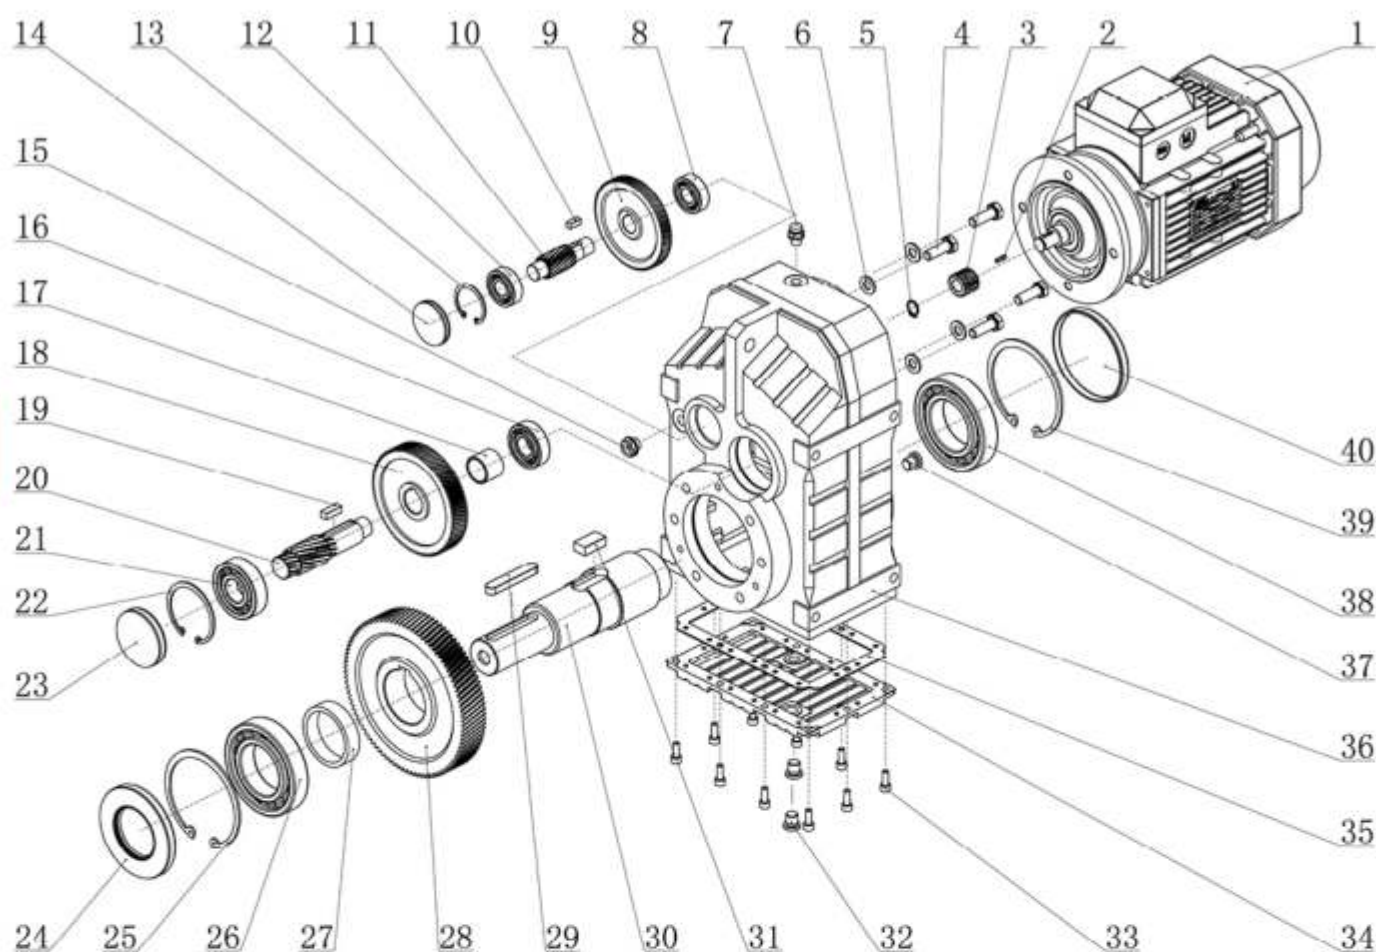


F系列爆炸图

1.电机	11.齿轴	21.轴承	31.平键
2.平键	12.轴承	22.孔用挡圈	32.螺塞
3.齿轮	13.孔用挡圈	23.平面油封	33.螺钉
4.螺栓	14.平面油封	24.骨架油封	34.箱盖
5.轴用挡圈	15.油镜	25.孔用挡圈	35.密封垫
6.平垫圈	16.轴承	26.轴承	36.箱体
7.通气帽	17.轴套	27.轴套	37.螺塞
8.轴承	18.齿轮	28.齿轮	38.轴承
9.齿轮	19.平键	29.平键	39.孔用挡圈
10.平键	20.齿轴	30.输出轴	40.平面油封

YFR.YFF.YFK.YFS

型号与标记:

Type Designations:

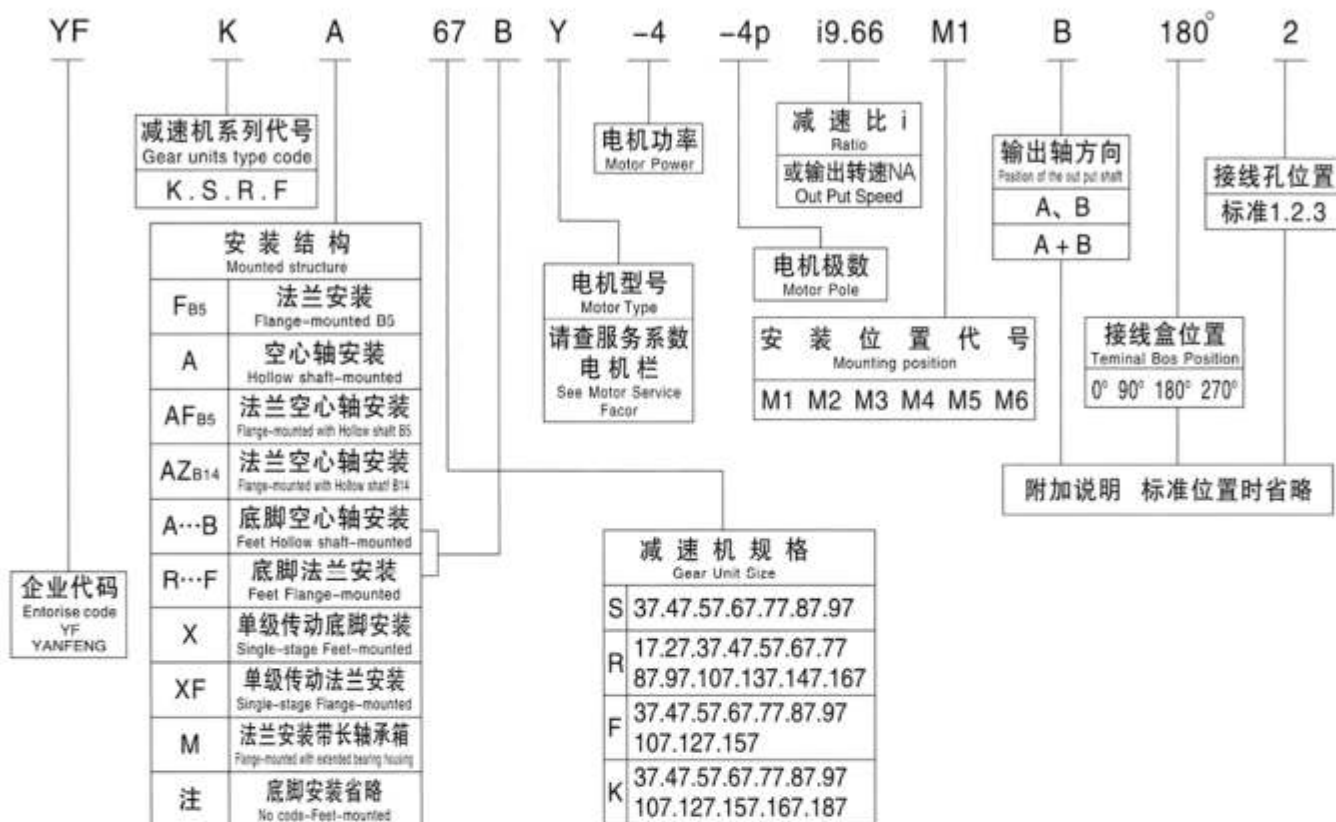

006

选型方法

减速机是按载荷平稳, 每天工作时间一定和少量起停次数的情况设计的, 而在实际使用中往往不是处于此种理想状况, 因此必须按照实际情况的载荷类型、运行时间、起动频率来确定工作机系数 f_1 、原动机系数 f_2 、起动系数 f_3 。使用小于或等于选型表中的服务系数 f_B , 即 $f_1 \times f_2 \times f_3 \leq f_B$ 。或将工作机所需的转矩乘以服务系数 ($f_1 \times f_2 \times f_3$) 应小于或等于减速机的许用转矩。

即 $T_N \geq T_2 \times f_1 \times f_2 \times f_3$

f_1 — 工作机系数 (见表1)

f_2 — 原动机系数 (见表2)

f_3 — 起动系数 (见表3)

T_2 — 工作机所需转矩

T_N — 减速机许用转矩 (见表13)

YFK系列和YFT系列螺旋锥齿减速机如果只承受单向载荷则最好注明旋转方向 (从输出端方向看), 这样有利于改善螺旋锥齿轮的受力状况。

我公司可承接特殊规格产品的订货, 并可为客户提供专用设计服务。

本样本中如有改进之处, 不另作通知, 请谅解。

Type selection method

Gear units are designed under the circumstance of steady load, stated operating time per day and a few starting times, but the practical condition will be not as perfect as the designed circumstance, so we must confirm driven machine factor f_1 , prime mover factor f_2 , starting factor f_3 according to actual load type, operating time, starting frequency. Let it less than or equal to the service factor f_B of selection table, viz $f_1 \times f_2 \times f_3 \leq f_B$, the needed torque of service machine multiply the service factor ($f_1 \times f_2 \times f_3$) should less than or equal to gear units, permissible torque.

Viz $T_N \geq T_2 \times f_1 \times f_2 \times f_3$

f_1 — driven machine factor (see table 1)

f_2 — prime mover factor (see table 2)

f_3 — starting factor (see table 3)

T_2 — the needed torque of driven machine

T_N — gear units, permissible torque (see table 13)

If the K series and T series spiral bevel gear units can only bear single direction load, please indicate the rotating direction (see from output side), which is good for improving the pressing state of the spiral bevel gear.

We accept the orders of products of special specification, and provide our customer with exclusive design service.

Design and specifications are subject to change without notice, Please forgive


输入功率及许用转矩
Input power rating and remissible torque

表13 Table13


机型 TYPE													
规格 SIZE	17	27	37	47	57	67	77	87	97	107	137	147	167
输入功率 INPUT POWER RATING(KW)	0.12-0.75	0.12-3	0.12-3	0.12-5.5	0.12-7.5	0.12-7.5	0.18-11	0.55-22	0.55-30	2.2-45	5.5-55	11-90	11-160
转动比 RATIO	383-8164	3.37-135.09	3.83-134.8	3.83-176.88	4.39-186.89	4.29-199.81	5.31-195.24	5.3-246.54	4.5-289.74	5.04-251.17	5.15-223.6	5-163.31	5-229.71
许用转矩 PERMISSBLE TORQUE(N·M)	87	128	196	305	440	595	705	1310	2110	4380	7910	12700	17700
机型 TYPE													
规格 SIZE	37	57	67	77	87	97	107						
输入功率 INPUT POWER RATING(KW)	0.12-1.1	0.12-5.5	0.12-7.5	1.1-11	3-22	5.5-30	5.5-45						
转动比 RATIO	1.62-4.43	1.3-5.5	1.4-6.07	1.42-5.63	1.39-6.45	1.42-5.79	1.44-6.63						
许用转矩 PERMISSBLE TORQUE(N·M)	20	71	120	215	395	600	810						
机型 TYPE													
规格 SIZE	37	47	57	67	77	87	97	107	127	157			
输入功率 INPUT POWER RATING(KW)	0.12-3	0.12-3	0.12-5.5	0.18-5.5	0.37-11	0.75-22	1.1-30	2.2-45	7.5-90	11-200			
转动比 RATIO	3.77-128.51	8.96-190.76	2.18-199.7	3.97-228.99	4.28-281.71	4.12-270.68	4.57-276.77	6.22-254.4	4.68-170.83	11.92-257.43			
许用转矩 PERMISSBLE TORQUE(N·M)	196	405	605	810	1490	2940	4310	7840	11000	16800			
机型 TYPE													
规格 SIZE	37	47	57	67	77	87	97	107	127	157	167		
输入功率 INPUT POWER RATING(KW)	0.18-3	0.18-3	0.18-5.5	0.18-5.5	0.55-11	0.75-22	1.1-30	3-45	7.5-90	11-200	11-200	18.5-200	
转动比 RATIO	5.36-106.38	5.81-131.87	6.57-145.3	7.28-144.79	7.24-192.18	7.21-197.37	8.71-176.05	8.69-143.47	8.68-146.07	12.65-146.07	17.34-164.5	17.18-179.86	
许用转矩 PERMISSBLE TORQUE(N·M)	156	400	600	785	1510	2760	4300	7210	13000	17800	31500	49400	
机型 TYPE													
规格 SIZE	37	47	57	67	77	87	97						
输入功率 INPUT POWER RATING(KW)	0.12-1.1	0.12-1.5	0.18-3	0.25-5.5	0.75-7.5	0.75-15	1.5-22						
转动比 RATIO	6.8-157.43	7.28-201	7.28-201	7.56-217.41	8.06-256.47	7.88-288	8.26-286.4						
许用转矩 PERMISSBLE TORQUE(N·M)	93	170	245	520	1170	2130	3990						

YFR、YFF、YFK、YFS系列


YFR

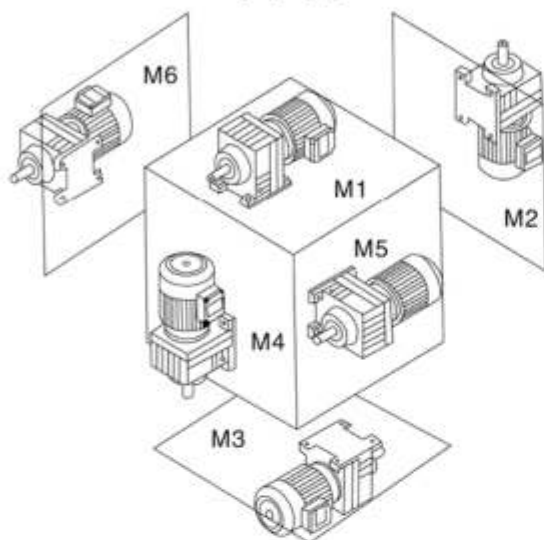


YFF

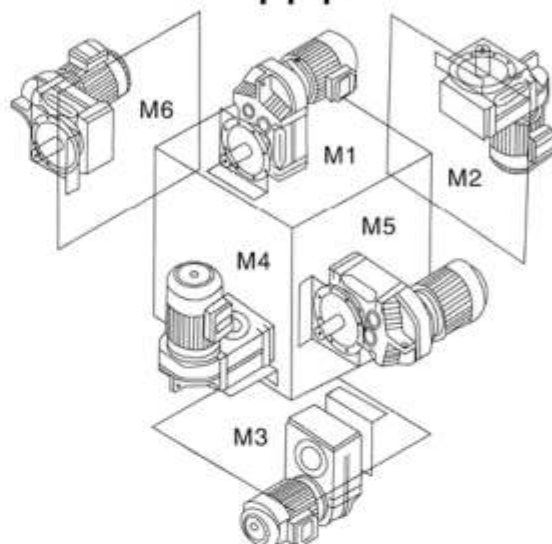

YFK

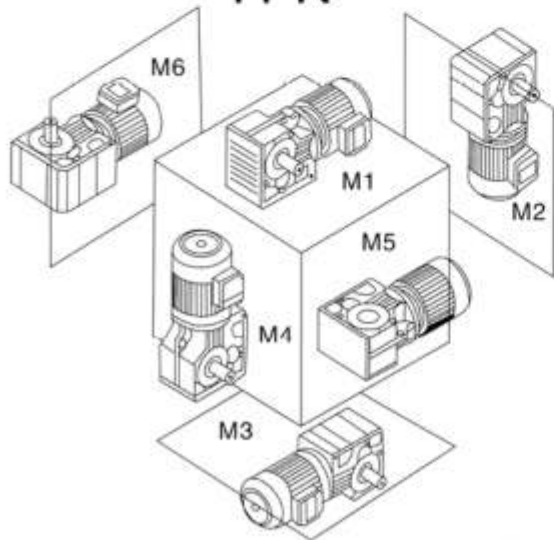

YFS

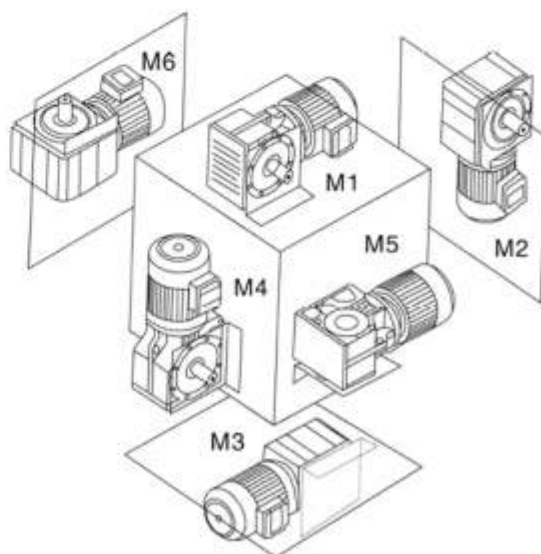


安装位置图例新旧对照


表14 Table14

Old and new installation position position legend constrast


新编号 New NO 旧编号 Old NO	M1	M2	M3	M4	M5	M6
R	B3 	V6 	B8 	V5 	B6 	B7
R..F	B35 	V36 	B85 	V15 	B65 	B75
RF	B5 	V3 	B5II 	V1 	B51 	B511
RX	B3 	V6 	B8 	V5 	B6 	B7
RXF	B5 	V3 	B5II 	V1 	B51 	B5111
F FA..B	B6 	V6 	B6II 	V5 	B3 B8 	B31 B81
FF	B5 	V3 	B5II 	V1 	B51 	B5111
FA FAF FAZ	H1 	H6 	H2 	H5 	H4 	H3
K KA..B	B3 B61 	B6 B81 	B8 	B31 B61 	V5 V51 	V6 V61
KF	B51 B3/B51	B5 B65	B5111 B8/B5111	B511 B6/B511	V1 	V11 V6/V11
KA KAF KAZ	H1 	H4 	H2 	H3 	H5 	H6
S	B3 B61 B811(仅用于S37) 	B6 B81 	B6 B311 	B31 B611 	V5 V51 	V6 V61 V511(仅用于S37)
SF	B51 	B5 	B5111 	B511 	V1 	V11
SA SAF SAZ	H1 	H4 	H2 	H3 	H5 	H6

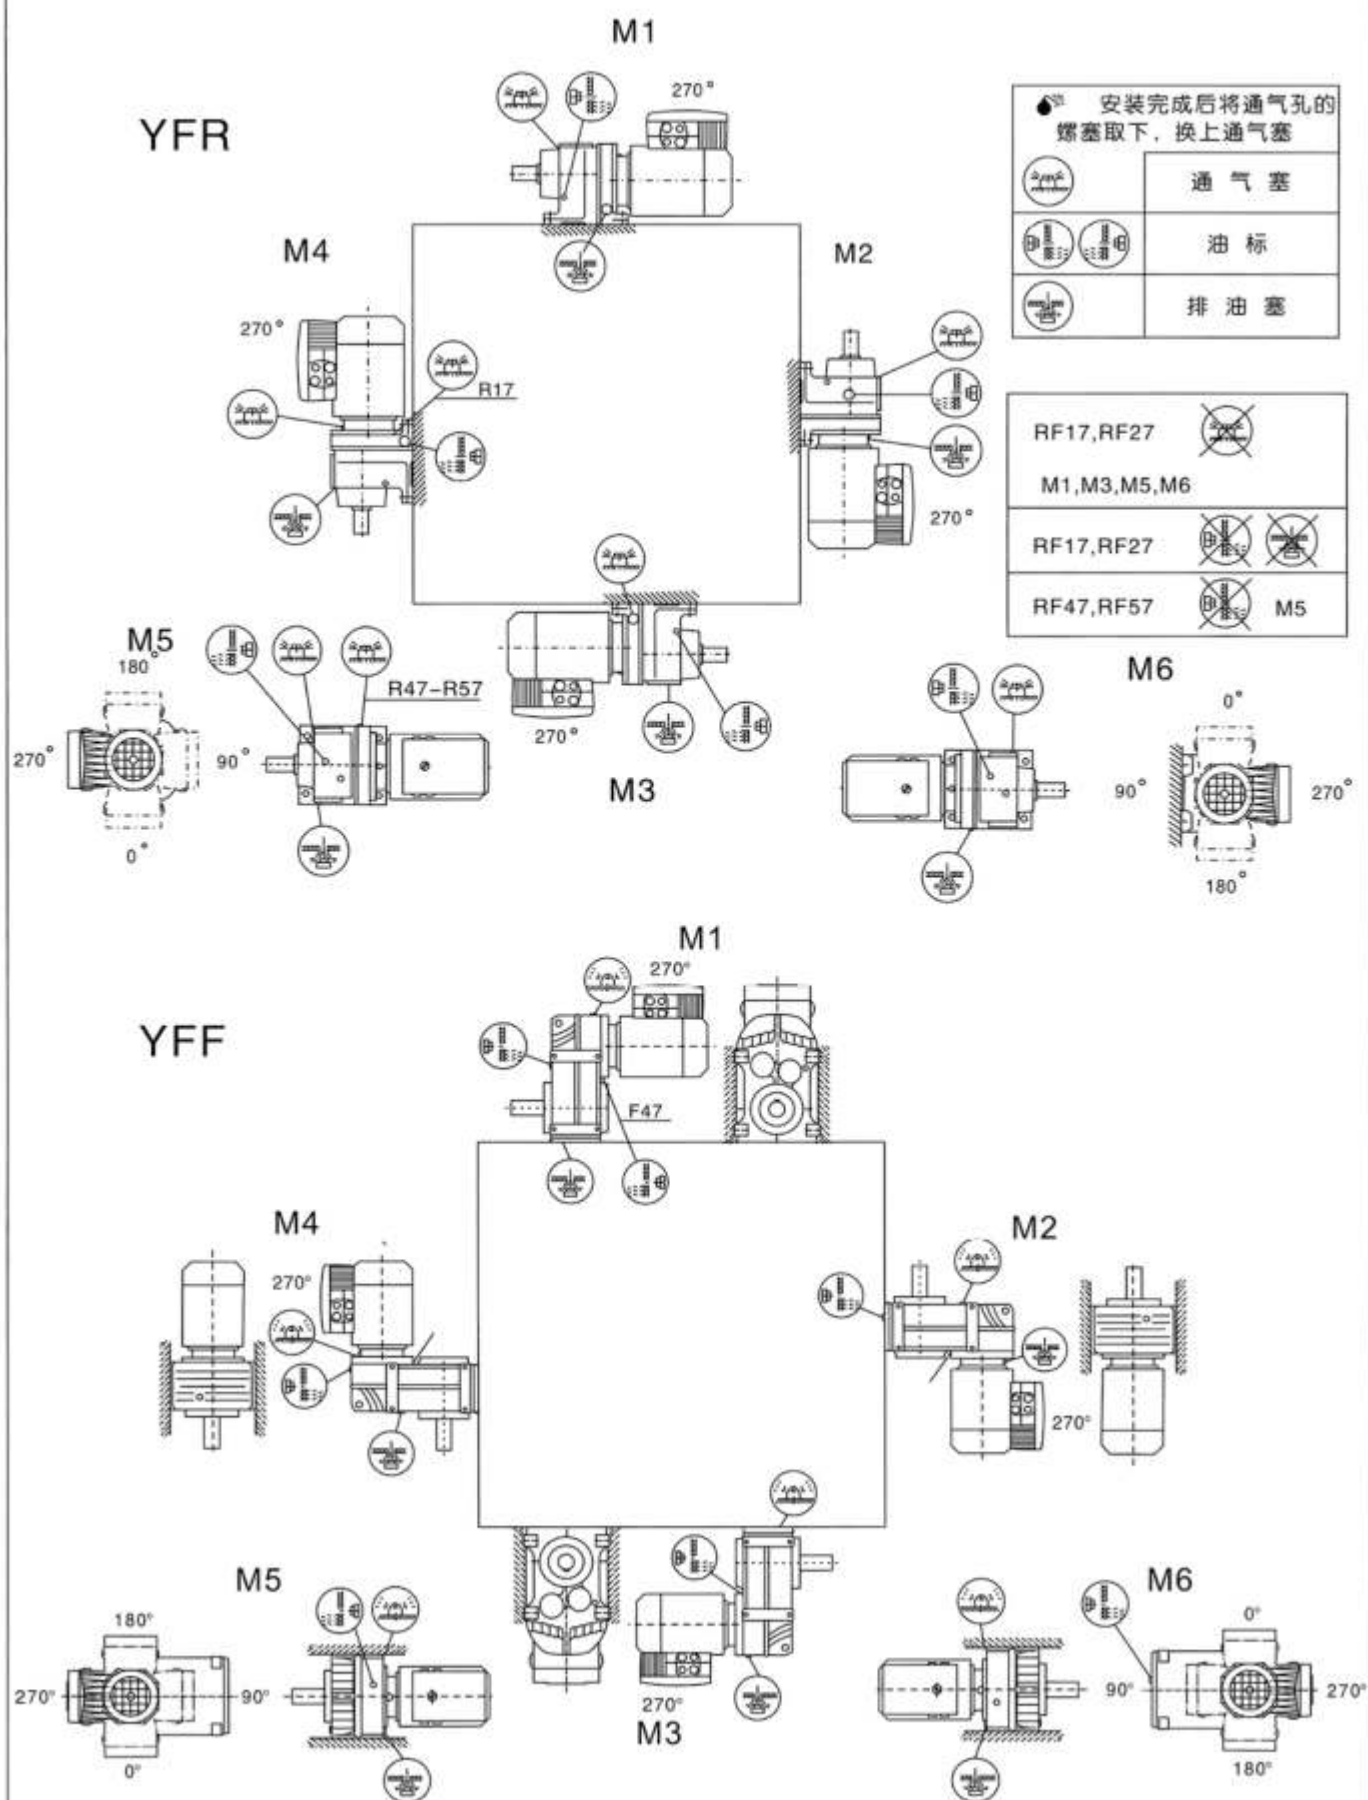

YFK

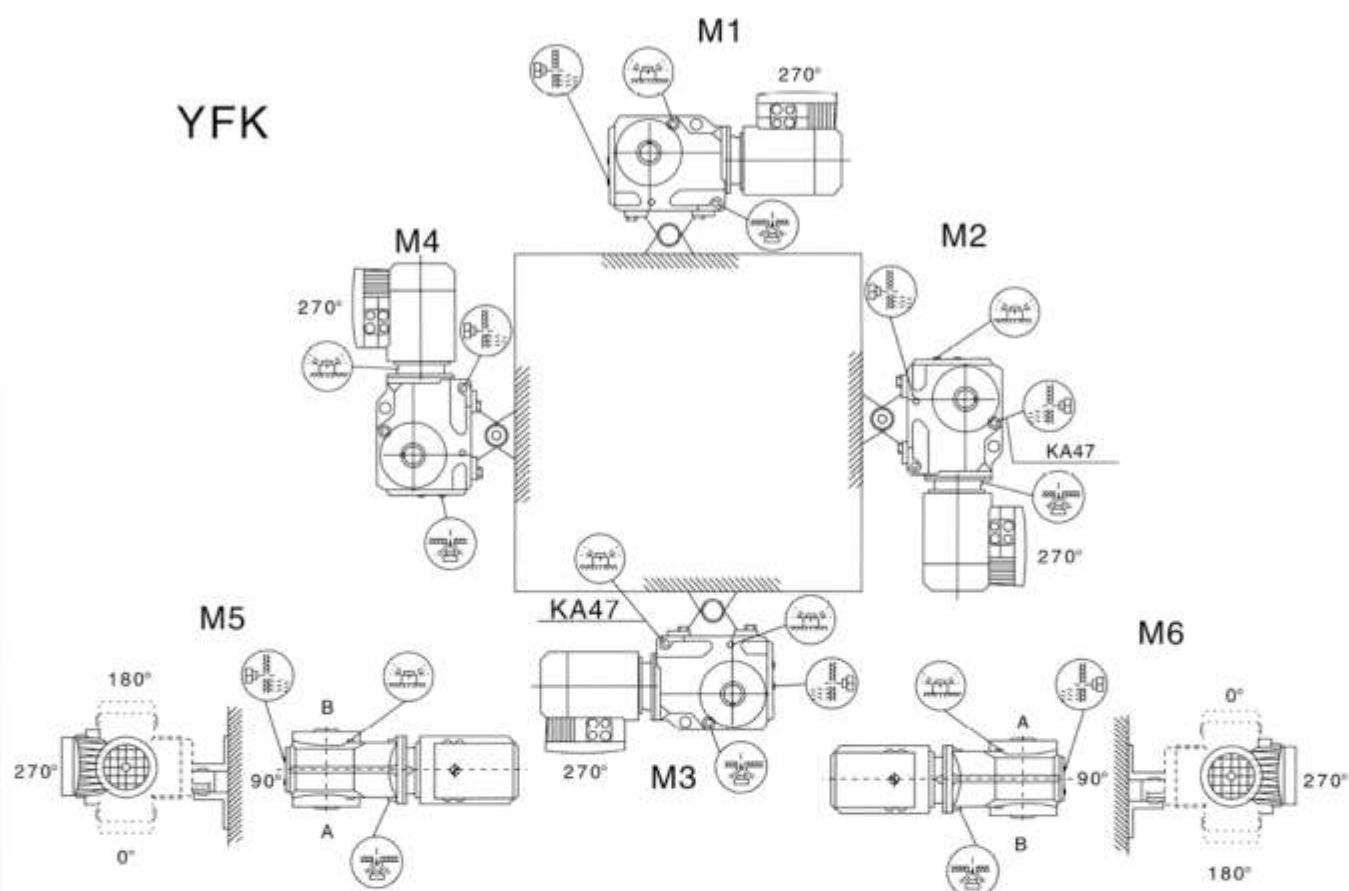

YFS


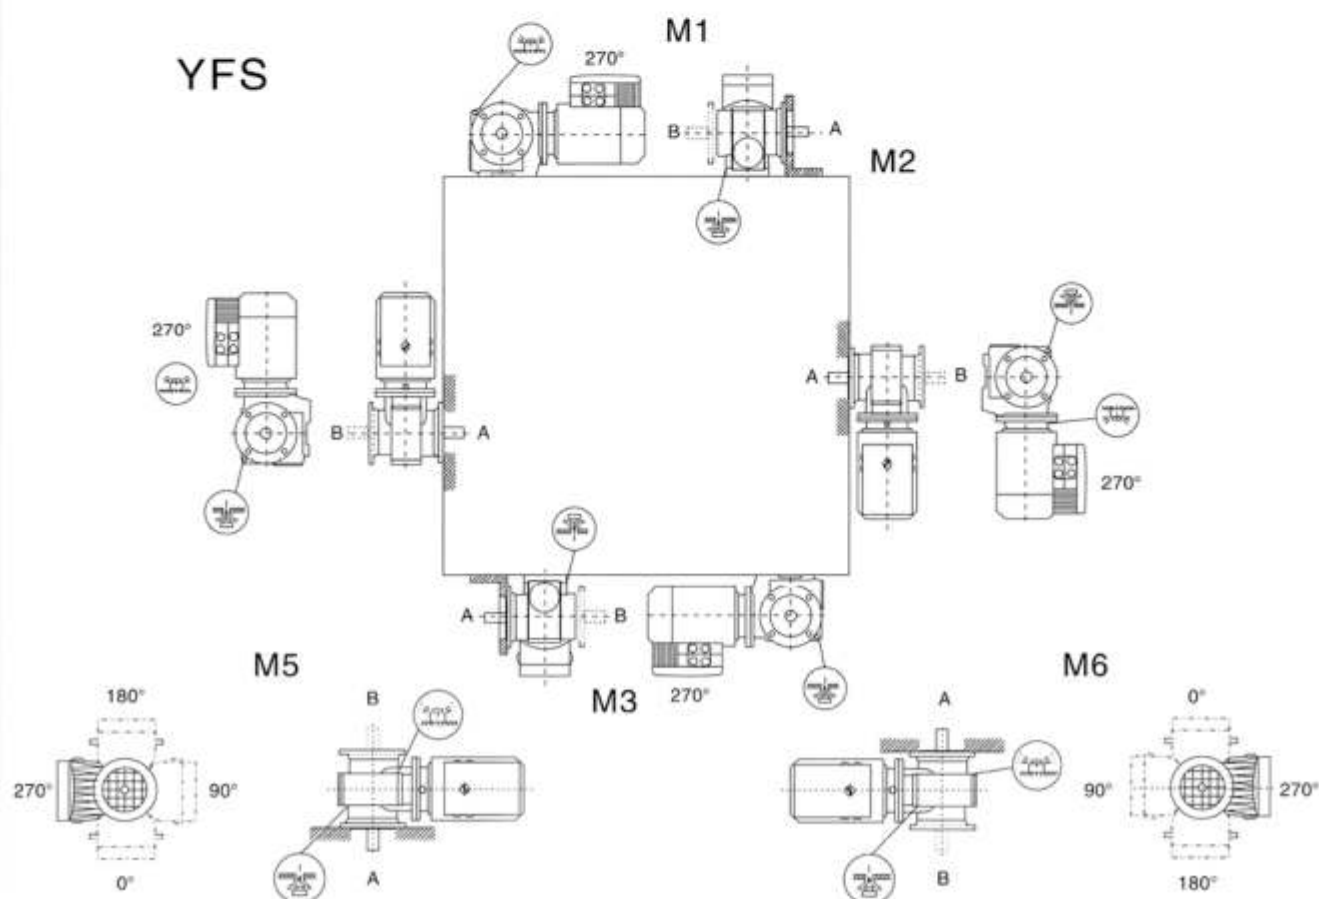


YFRXF




安装完成后将通气孔的
螺塞取下，换上通气塞

	通 气 塞
	油 标
	排 油 塞


012

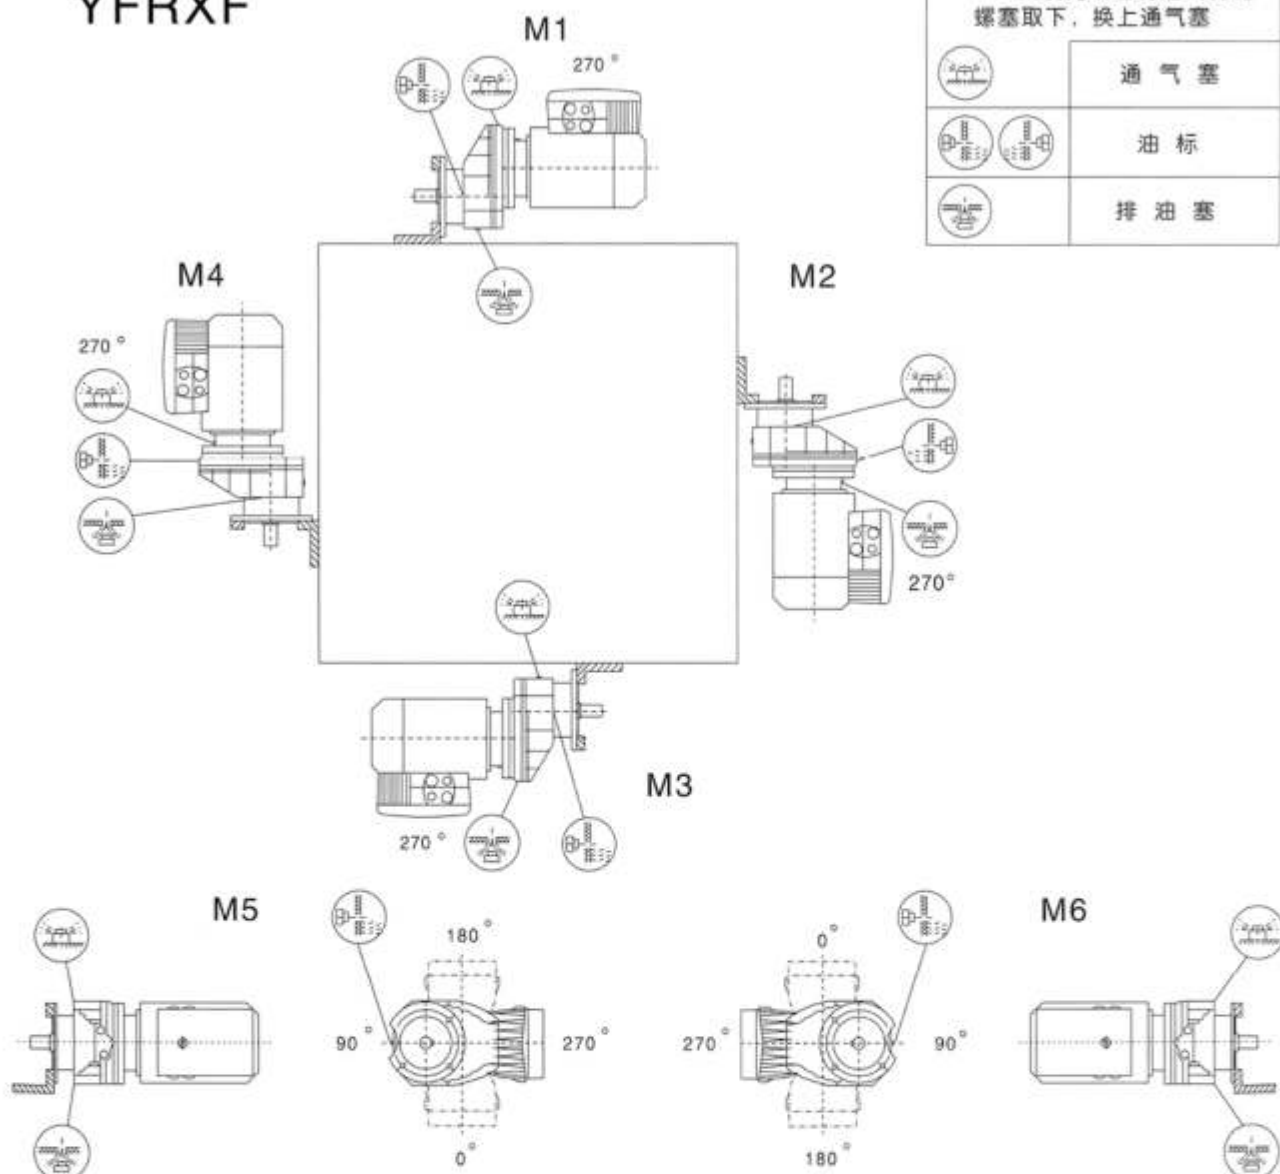

接线盒 标准安装型式



接线盒 特殊安装型式:



接线孔位置“标准”，“1”，“2”或“3”
(DR63仅用于“标准”和“2”)

YFR.YFF.YFK.YFS...AD

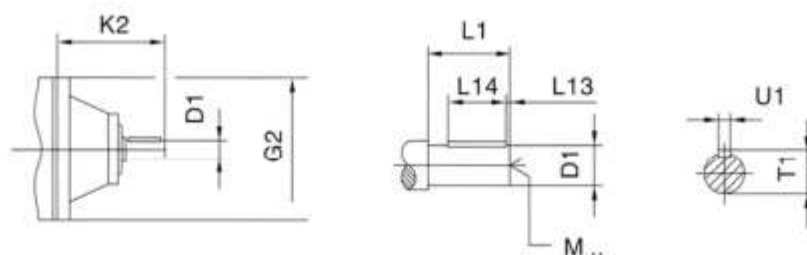


表15 Table15

		G2	K2	D1	L1	L13	L14	T1	U1	M
YFS37 YFR27 YFR37 YFS47 YFF37 YFF47 YFS57 YFK37	AD1	120	102	16	40	4	32	18	5	M5
	AD2		130	19	40	4	32	21.5	6	M6
YFR47 YFR57 YFR67 YFS67 YFF57 YFF67 YFK47 YFK57 YFK67	AD2	160	123	19	40	4	32	21.5	6	M6
	AD3		159	24	50	5	40	27	8	M8
YFS77 YFR77 YFF77 YFK77	AD2	200	116	19	40	4	32	21.5	6	M6
	AD3		151	24	50	5	40	27	8	M8
	AD4		224	38	80	5	70	41	10	M12
YFS87 YFR87 YFF87 YFK87	AD2	250	111	19	40	4	32	21.5	6	M6
	AD3		156	28	60	5	50	31	8	M10
	AD4		219	38	80	5	70	41	10	M12
	AD5		292	42	110	10	70	45	12	M16
YFS97 YFR97 YFF97 YFK97	AD3	300	151	28	60	5	50	31	8	M10
	AD4		214	38	80	5	70	41	10	M12
	AD5		287	42	110	10	70	45	12	M16
	AD6		327	48	110	10	80	51.5	14	M16
YFR107 YFF107 YFK107	AD3	350	145	28	60	5	50	31	8	M10
	AD4		208	38	80	5	70	41	10	M12
	AD5		281	42	110	10	70	45	12	M16
	AD6		321	48	110	10	80	51.5	14	M16
YFR137	AD4	400	201	38	80	5	70	41	10	M12
	AD5		274	42	110	10	70	45	12	M16
	AD6		314	48	110	10	80	51.5	14	M16
	AD7		308	55	110	10	90	59	16	M20
YFR147 YFF127 YFK127	AD4	450	193	38	80	5	70	41	10	M12
	AD5		266	42	110	10	70	45	12	M16
	AD6		306	48	110	10	80	51.5	14	M16
	AD7		300	55	110	10	90	59	16	M20
	AD8		383	70	140	15	110	74.5	20	M20
YFR167 YFF157 YFK157 YFK167 YFK187	AD5	550	258	42	110	15	70	45	12	M16
	AD6		298	48	110	10	80	51.5	14	M16
	AD7		292	55	110	10	90	59	16	M20
	AD8		374	70	140	15	110	74.5	20	M20

输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
0.12kW								0.12kW							
0.06	15000	22323	84600	0.80	YFFAI27R77	4	425	0.97	920	1429	9270	0.90	YFFA67R37	4	43
0.07	12600	19048	89300	0.95	YFFAI27R77	4	465	1.1	830	1271	10200	1.00	YFFAF67R37	4	49
0.08	10800	16656	90000	1.1	YFFAI27R77	4	460	1.2	700	1102	11300	1.15	YFF67R37	4	46
0.09	9870	14722	90000	1.2	YFFAI27R77	4	510	1.4	615	970	11800	1.35	YFF67R37	4	52
0.11	7980	12912	90000	1.5				1.6	540	858	12200	1.50			
0.12	7090	11656	90000	1.7				1.8	475	755	12500	1.75			
0.14	6300	10191	90000	1.9				2.2	405	641	12800	2.0			
								2.4	375	572	12900	2.2			
								2.7	320	509	13000	2.6			
								3.2	275	437	13000	3.0			
0.09	9590	14767	44400	0.80	YFFA07R77	4	275	1.4	655	967	5860	0.90	YFFA57R37	4	39
0.12	7610	11348	50000	1.00	YFFAF07R77	4	295	1.6	585	851	9320	1.05	YFFAF57R37	4	45
0.14	5890	10039	54300	1.30	YFFA07R77	4	290	1.9	500	738	9920	1.20	YFF57R37	4	39
0.16	4880	8548	56600	1.55	YFFAF07R77	4	320	2.1	435	646	10400	1.40	YFF57R37	4	46
0.18	4740	7674	56900	1.60				2.5	370	558	10700	1.60			
0.20	4120	6767	58200	1.85				2.7	330	506	11000	1.80			
0.23	3530	5954	59400	2.2				3.0	285	452	11200	2.0			
0.26	3070	5223	60300	2.5				3.2	295	426	11200	2.1			
0.30	2890	4567	60600	2.7				3.6	260	382	11300	2.3			
0.39	2140	3521	61900	3.6				4.2	225	330	11500	2.7			
								4.6	200	298	11500	3.0			
								5.3	177	262	11500	3.4			
0.19	4800	7328	23100	0.90	YFFA97R57	4	185	2.2	425	622	3390	0.95	YFFA47R17	4	24
0.21	4040	6469	30700	1.05	YFFAF97R57	4	205	2.5	370	543	6320	1.10	YFFAF47R17	4	27
0.25	3680	5615	31600	1.15	YFFA97R57	4	190	2.6	365	524	6390	1.10	YFF47R17	4	25
0.28	3200	4961	32800	1.35	YFFAF97R57	4	225	2.8	340	489	6690	1.20	YFF47R17	4	28
0.32	2800	4333	33800	1.55				2.9	320	475	6890	1.25			
0.35	2550	3906	34300	1.70				3.2	290	427	7130	1.35			
0.41	2210	3352	35000	1.95				3.3	280	419	7250	1.45			
0.47	1820	2907	35700	2.4				3.6	260	381	7400	1.55			
0.54	1670	2553	36000	2.6				4.1	225	334	7610	1.75			
								4.7	198	295	7780	2.0			
								5.4	166	253	7940	2.4			
0.28	3250	4954	23640	0.90	YFFA87R57	4	120	4.2	225	326	3890	0.90	YFFA37R17	4	19
0.33	2690	4245	24100	1.10	YFFAF87R57	4	130	4.3	210	322	4130	0.95	YFFAF37R17	4	20
0.37	2200	3721	25800	1.35	YFF87R57	4	125	4.8	195	285	4370	1.05	YFF37R17	4	19
0.43	2140	3244	26000	1.40	YFF87R57	4	140	5.0	184	278	4510	1.10	YFF37R17	4	21
0.48	1900	2881	26700	1.60				5.5	170	250	4670	1.20			
0.54	1700	2576	27300	1.75				5.7	157	242	4810	1.30			
0.63	1440	2199	28000	2.1				6.2	149	221	4890	1.35			
0.72	1240	1930	28400	2.4				6.3	150	219	4880	1.35			
0.81	1120	1709	28700	2.7				7.4	127	186	5080	1.60			
0.92	980	1493	29000	3.0				8.3	114	167	5170	1.75			
1.1	785	1300	29400	3.8				3.9	290	228.99	13000	2.8	YFFA67	6	32
1.2	710	1148	29500	4.2				4.6	250	195.39	13000	3.3	YFFAF67	6	38
								5.3	220	170.85	13000	3.8	YFF67	6	35
								5.6	205	162.31	13000	4.0	YFF67	6	41
								6.3	181	142.4	13000	4.5			
0.53	1750	2613	13800	0.85	YFFA77R37	4	65	4.5	255	199.7	11400	2.4	YFFA57	6	28
0.60	1520	2284	15600	1.00	YFFAF77R37	4	72	4.9	235	183.6	11500	2.6	YFFAF57	6	34
0.68	1340	2029	16700	1.10	YFF77R37	4	69	5.7	200	157.09	11500	3.0	YFF57	6	28
0.80	1130	1728	17800	1.35	YFF77R37	4	80	6.6	173	136.16	11500	3.5	YFF57	6	35
0.89	1040	1544	18200	1.45				7.1	162	127.27	11500	3.7			
1.0	910	1354	18600	1.65				6.9	166	199.70	11500	3.6	YFFA57	4	28
1.1	810	1200	19000	1.85				7.5	153	183.60	11500	3.9	YFFAF57	4	34
1.3	710	1053	19200	2.1				8.8	130	157.09	11500	4.6	YFF57	4	28
1.5	605	910	19500	2.5				10	113	136.16	11500	5.3	YFF57	4	35
1.7	510	810	19700	2.9				4.7	245	190.76	7510	1.65	YFFA47	6	21
1.9	445	710	19800	3.4				5.1	225	175.38	7640	1.80	YFFAF47	6	24
								6.0	191	150.06	7820	2.1	YFF47	6	22
								6.9	166	130.07	7940	2.4	YFF47	6	25
								7.4	155	121.57	7990	2.6			
								8.6	134	105.09	8070	3.0			
								10	114	89.29	8130	3.5			
								11	102	79.72	8160	3.9			
								7.2	158	190.76	7970	2.5	YFFA47	4	21
								7.9	146	175.38	8020	2.8	YFFAF47	4	24
								9.2	125	150.06	8100	3.2	YFF47	4	22
								11	108	130.07	8150	3.7	YFF47	4	25
								7.0	164	128.51	4740	1.20	YFFA37	6	16
								7.6	150	117.88	4880	1.35	YFFAF37	6	18
								9.0	128	100.36	5070	1.55	YFF37	6	17
								10	110	86.53	5190	1.80	YFF37	6	18
								11	103	80.65	5240	1.95			

输出转速 output speed n _a r/min	输出转矩 output torque M _a N·m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque M _a N·m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg
0.12kW								0.18kW							
11	107	128.51	5220	1.85	YFFA37	4	16	0.46	3160	2881	12300	0.95	YFFA87R57	4	115
12	98	117.88	5270	2.0	YFFA37	4	18	0.51	2820	2576	23600	1.05	YFFA187R57	4	130
14	83	100.36	5340	2.4	YFF37	4	17	0.60	2400	2199	25200	1.25	YFF87R57	4	125
16	72	86.53	5400	2.8	YFF37	4	18	0.68	2080	1930	26200	1.45	YFF87R57	4	140
17	67	80.65	5410	3.0				0.77	1860	1709	26800	1.60			
20	59	70.50	5440	3.4				0.88	1640	1493	27500	1.85			
21	55	66.09	5460	3.6				1.0	1350	1300	28200	2.2			
24	48	58.32	5470	4.1				1.1	1210	1148	28500	2.5			
25	45	54.54	5480	4.4				1.3	1050	1010	28900	2.9			
27	43	51.70	5490	4.7				1.5	940	887	29100	3.2			
29	39	47.02	5500	5.1				1.7	810	780	29400	3.7			
31	36	43.83	5500	5.5				0.76	1880	1728	7810	0.80	YFFA77R37	4	65
36	32	38.31	5510	6.3				0.86	1710	1544	14100	0.90	YFFA177R37	4	72
38	30	35.91	5520	6.7				0.98	1500	1354	15700	1.00	YFF77R37	4	69
44	26	31.69	5520	7.6				1.1	1330	1200	16800	1.15	YFF77R37	4	80
49	23	28.09	5520	8.6				1.2	1170	1053	17600	1.30			
58	20	23.88	5270	10				1.5	1000	910	18300	1.50			
67	17	20.57	5030	12				1.6	860	810	18800	1.75			
72	16	19.27	4930	13				1.9	755	710	19100	2.0			
81	14	17.03	4740	14				2.2	670	615	19300	2.2			
87	13	15.81	4630	15				1.5	910	858	9370	0.90	YFFA57R37	4	43
96	12	14.33	4490	17				1.8	800	755	10400	1.00	YFFA157R37	4	49
107	11	12.87	4330	19				2.1	685	641	11400	1.20	YFF57R37	4	46
125	9.2	11.08	4130	21				2.3	625	572	11800	1.30	YFF57R37	4	52
132	8.7	10.42	4050	21				2.6	540	509	12200	1.50			
154	7.4	8.97	3860	24				2.9	510	454	12400	1.60			
186	6.2	7.44	3630	23				3.0	470	437	12600	1.75			
205	5.6	6.74	3510	25				3.4	420	384	12700	1.95			
228	5.0	6.05	3390	27				4.0	370	333	12900	2.2			
265	4.3	5.21	3230	29				4.4	325	297	13000	2.5			
282	4.1	4.90	3170	29				5.1	285	261	13000	2.9			
327	3.5	4.22	3020	31				5.6	260	238	13000	3.2			
0.18kW								6.6	215	200	13000	3.8			
0.10	13500	12912	87500	0.90	YFFA127R77	4	425	2.4	615	558	9080	1.00	YFFA47R17	4	39
0.11	12100	11656	90000	1.00	YFFA127R77	4	465	2.6	550	506	9560	1.10	YFFA147R17	4	45
0.13	10700	10191	90000	1.10	YFF127R77	4	460	2.9	485	452	10000	1.25	YFF47R17	4	39
0.15	8980	8831	90000	1.35	YFF127R77	4	510	3.1	485	426	10000	1.25	YFF47R17	4	46
0.17	7770	7643	90000	1.55				3.4	415	386	10500	1.45			
0.20	7150	6715	90000	1.70				3.5	430	382	10400	1.40			
0.15	8560	8548	47400	0.90	YFFA107R77	4	275	3.9	370	338	10800	1.65			
0.17	8050	7674	48800	0.95	YFFA107R77	4	295	4.0	360	330	10700	1.60			
0.20	7030	6767	51500	1.10	YFF107R77	4	290	4.4	335	298	11000	1.80			
0.22	6090	5954	53800	1.25	YFF107R77	4	320	5.0	395	262	11200	2.0			
0.25	5310	5223	55600	1.45				5.8	250	226	11400	2.4			
0.29	4860	4567	56600	1.60				6.6	215	200	11500	2.8			
0.37	3660	3521	59100	2.1				3.6	400	370	5920	1.00	YFFA47R17	4	24
0.43	3170	3037	60100	2.4				4.1	365	324	6410	1.10	YFFA147R17	4	27
0.48	2880	2756	60600	2.7				4.6	315	288	6910	1.25	YFF47R17	4	25
0.56	2470	2369	61400	3.1				5.3	270	249	7310	1.50	YFF47R17	4	28
0.64	2160	2068	61900	3.6				4.0	375	334	6260	1.05			
0.30	4660	4333	27900	0.90	YFFA97R57	4	185	4.5	330	295	6780	1.20			
0.34	4260	3906	30000	1.00	YFFA97R57	4	205	5.2	280	253	7250	1.45			
0.39	3670	3352	31600	1.15	YFF97R57	4	190	6.1	245	217	7490	1.60			
0.45	3100	2907	33100	1.40	YFF97R57	4	225	7.0	215	190	7690	1.85			
0.52	2790	2553	33800	1.55				7.4	200	178	7770	2.0			
0.59	2450	2245	34500	1.75				7.1	210	186	4160	0.95	YFFA37R17	4	19
0.67	2130	1970	35200	2.0				7.9	188	167	4460	1.05	YFFA137R17	4	20
0.77	1890	1722	35600	2.3				9.1	166	145	4720	1.20	YFF37R17	4	19
0.86	1670	1527	36000	2.6				10	146	129	4910	1.35	YFF37R17	4	21
0.99	1380	1327	36500	3.1				3.1	555	281.71	19600	2.7	YFFA77	6	57
1.1	1280	1171	36600	3.3				3.3	520	262.93	19700	2.9	YFFA177	6	63
								3.8	445	225.79	19800	3.4	YFF77	6	60
													YFF77	6	71

输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg
0.18kW								0.25kW							
3.8	450	228.99	12600	1.80	YFFA67	6	33	0.15	13300	8831	88000	0.90	YFFA127R77	4	425
4.4	385	195.39	12900	2.1	YFFA67	6	39	0.17	11500	7643	90000	1.05	YFFA127R77	4	465
5.1	340	170.85	13000	2.4	YFF67	6	36	0.19	10400	6715	90000	1.15	YFF127R77	4	465
					YFF67	6	42	0.22	9190	5925	90000	1.30	YFF127R77	4	510
5.8	300	228.99	13000	2.8	YFFA67	4	32	0.25	7860	5153	90000	1.55			
6.8	255	195.39	13000	3.2	YFFA67	4	38	0.29	6850	4533	90000	1.75			
7.7	225	170.85	13000	3.7	YFF67	4	35								
					YFF67	4	41	0.22	9000	5954	46200	0.85	YFFA107R77	4	275
4.4	395	199.70	10600	1.50	YFFA57	6	29	0.25	7860	5223	49300	1.00	YFFA107R77	4	295
4.7	365	183.60	10800	1.65	YFFA57	6	34	0.28	7090	4567	51400	1.10	YFF107R77	4	290
5.5	310	157.09	11100	1.95	YFF57	6	29	0.37	5370	3521	55500	1.45	YFF107R77	4	320
6.4	270	136.16	11300	2.2	YFF57	6	35	0.43	4680	3037	57000	1.65			
6.8	250	127.27	11400	2.4				0.47	4240	2756	57900	1.80			
7.9	215	110.01	11500	2.8				0.55	3650	2369	59100	2.1			
								0.63	3180	2068	60000	2.4			
6.6	260	199.70	11300	2.3	YFFA57	4	28	0.81	2440	1597	61400	3.2			
7.2	240	183.60	11500	2.5	YFFA57	4	34	0.93	2110	1401	62000	3.6			
8.4	205	157.09	11500	2.9	YFF57	4	28								
9.7	177	136.16	11500	3.4	YFF57	4	35								
10	166	127.27	11500	3.6				0.45	4530	2907	29200	0.95	YFFA97R57	4	185
								0.51	4050	2553	30600	1.05	YFFA97R57	4	205
4.6	375	190.76	6240	1.05	YFFA47	6	22	0.58	3560	2245	31900	1.20	YFF97R57	4	190
5.0	345	175.38	6600	1.15	YFFA47	6	24	0.66	3100	1970	33100	1.40	YFF97R57	4	225
5.8	295	150.06	7090	1.35	YFF47	6	22	0.75	2740	1722	33900	1.55			
6.7	255	130.07	7410	1.55	YFF47	6	25	0.85	2430	1527	34600	1.75			
7.2	240	121.57	7530	1.65				0.98	2040	1327	35300	2.1			
								1.1	1860	1171	35600	2.3			
6.9	250	190.76	7470	1.60	YFFA47	4	21	1.3	1630	1022	36100	2.6			
7.5	230	175.38	7610	1.75	YFFA47	4	24								
8.8	195	150.06	7800	2.0	YFF47	4	22								
10	169	130.07	7920	2.4	YFF47	4	25	0.67	3040	1930	18200	1.00	YFFA87R57	4	120
11	158	121.57	7970	2.5				0.76	2710	1709	24000	1.10	YFFA87R57	4	130
								0.87	2380	1493	25200	1.25	YFF87R57	4	125
7.4	235	117.88	3750	0.85	YFFA37	6	17	1.0	1990	1300	26500	1.50	YFF87R57	4	140
8.7	198	100.36	4320	1.00	YFFA37	6	18	1.1	1780	1148	27100	1.70			
10	171	86.53	4660	1.15	YFF37	6	17	1.3	1550	1010	27700	1.95			
11	159	80.65	4790	1.25	YFF37	6	19	1.5	1370	887	28100	2.2			
12	139	70.50	4970	1.45				1.7	1200	780	28500	2.5			
								1.9	1020	674	28900	2.9			
10	167	128.51	4700	1.20	YFFA37	4	16								
11	154	117.88	4850	1.30	YFFA37	4	18	1.2	1690	1053	14300	0.90	YFFA77R37	4	66
13	131	100.36	5050	1.55	YFF37	4	17	1.4	1450	910	16000	1.05	YFFA77R37	4	72
15	113	86.53	5180	1.75	YFF37	4	18	1.6	1260	810	17100	1.20	YFF77R37	4	70
16	105	80.65	5230	1.90				1.8	1110	710	17900	1.35	YFF77R37	4	80
19	92	70.50	5300	2.2				2.1	970	615	18400	1.55			
20	86	66.09	5330	2.3				2.4	850	538	18800	1.75			
23	76	58.32	5380	2.6				2.7	760	480	19100	2.0			
24	71	54.54	5400	2.8				3.2	645	413	19400	2.3			
26	67	51.70	5410	3.0											
28	61	47.02	5440	3.3				2.0	1000	641	2370	0.80	YFFA67R37	4	44
30	57	43.83	5450	3.5				2.3	910	572	9440	0.90	YFFA67R37	4	50
34	50	38.31	5470	4.0				2.6	795	509	10500	1.05	YFF67R37	4	46
37	47	35.91	5480	4.3				2.9	740	454	11000	1.10	YFF67R37	4	53
42	41	31.69	5790	4.8				3.0	685	437	11400	1.20			
47	37	28.09	5500	5.5				3.3	635	392	11700	1.30			
55	31	23.88	5260	6.4				3.9	535	333	12200	1.55			
56	31	23.36	5240	6.5				4.4	475	297	12500	1.70			
64	27	20.57	5030	7.5				5.0	420	261	12700	1.95			
69	25	19.27	4930	8.0				5.5	375	238	12900	2.2			
78	22	17.03	4740	9.0											
83	21	15.81	4640	9.7				3.4	605	386	9170	1.00	YFFA57R37	4	40
92	19	14.33	4500	11				3.8	525	338	9740	1.10	YFFA57R37	4	45
103	17	12.87	4350	12				3.9	535	330	9680	1.15	YFF57R37	4	40
119	14	11.08	4150	13				4.4	485	298	10000	1.25	YFF57R37	4	46
127	14	10.42	4070	14				5.0	425	262	10400	1.40			
147	12	8.97	3880	15				5.1	400	255	10600	1.50			
178	9.7	7.44	3650	15				5.8	360	226	10800	1.65			
196	8.8	6.74	3540	16				6.5	320	200	11000	1.90			
218	7.9	6.05	3420	17				7.7	270	170	11300	2.2			
253	6.8	5.21	3260	18											
269	6.4	4.90	3190	19											
313	5.5	4.22	3040	20											

输出转速 output speed n _a r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
0.25kW								0.25kW							
5.1	405	253	5850	1.00	YFFA47R17	4	25	10	235	128.51	3690	0.85	YFFA37	4	17
5.2	395	249	6020	1.10	YFFAF47R17	4	27	11	215	117.88	4040	0.90	YFFAF37	4	18
6.0	350	218	6580	1.15	YFF47R17	4	25	13	184	100.36	4500	1.10	YFF37	4	17
6.7	305	193	6970	1.30	YFFF47R17	4	28	15	159	86.53	4790	1.25	YFFF37	4	19
6.8	310	190	7000	1.35				16	148	80.65	4900	1.35			
7.3	290	178	7150	1.40				18	130	70.50	5060	1.55			
7.4	280	175	7250	1.45				20	121	66.09	5120	1.65			
8.7	240	149	7520	1.65				22	107	58.32	5210	1.85			
9.9	210	131	7710	1.90				24	100	54.54	5260	2.0			
								25	95	51.70	5280	2.1			
8.9	240	145	3640	0.85	YFFA37R17	4	20	28	86	47.02	5330	2.3			
10	210	129	4130	0.95	YFFAF37R17	4	21	30	81	43.83	5360	2.5			
11	193	118	4390	1.05	YFF37R17	4	20	34	70	38.31	5400	2.8			
13	160	98	4780	1.25	YFFF37R17	4	22	36	66	35.91	5420	3.0			
15	140	87	4970	1.45				41	58	31.69	5450	3.4			
								46	52	28.09	5430	3.9			
3.1	765	281.71	19100	1.95	YFFA77	6	57	54	44	23.88	5180	4.6			
3.3	715	262.93	19200	2.1	YFFAF77	6	64	55	43	23.63	5170	4.6			
3.9	615	225.79	19500	2.5	YFF77	6	61	63	38	20.57	4960	5.3			
4.4	540	198.31	19600	2.8	YFFF77	6	72	67	35	19.27	4870	5.7			
4.7	510	188.40	19700	2.9				76	31	17.03	4690	6.4			
								82	29	15.81	4590	6.9			
3.8	620	228.99	11800	1.30	YFFA67	6	34	91	26	14.33	4460	7.6			
4.5	530	195.39	12300	1.55	YFFAF67	6	41	101	24	12.87	4320	8.5			
5.2	465	170.85	12600	1.75	YFF67	6	37	117	20	11.08	4120	9.3			
5.4	440	162.31	12700	1.85	YFFF67	6	43	125	19	10.42	4050	9.7			
6.2	385	142.40	12900	2.1				145	17	8.97	3860	11			
								175	14	7.44	3630	11			
5.7	420	228.99	12700	1.95	YFFA67	4	33	193	12	6.74	3520	11			
6.7	360	195.39	13000	2.3	YFFAF67	4	39	215	11	6.05	3410	12			
7.6	315	170.85	13000	2.6	YFF67	4	36	249	9.6	5.21	3250	13			
8.0	300	162.31	13000	2.8	YFFF67	4	42	265	9.0	4.90	3190	13			
9.1	260	142.40	13000	3.1				308	7.7	4.22	3040	14			
								0.37kW							
4.4	540	199.70	9630	1.10	YFFA57	6	30	0.21	14900	6715	84800	0.80	YFFA127R77	4	425
4.8	500	183.60	9940	1.20	YFFAF57	6	36	0.23	13100	5925	88300	0.90	YFFAF127R77	4	465
5.6	425	157.09	10400	1.40	YFF57	6	31	0.27	11300	5153	90000	1.05	YFF127R77	4	465
6.5	370	136.16	10800	1.60	YFFF57	6	37	0.30	9850	4533	90000	1.20	YFFF127R77	4	510
6.9	345	127.27	10900	1.75				0.35	8590	3926	90000	1.40			
8.0	300	110.01	11100	2.0				0.40	7510	3454	90000	1.60			
								0.46	6570	3031	90000	1.85			
6.5	365	199.70	10800	1.65	YFFA57	4	29	0.45	6720	3037	52300	1.15	YFFA107R77	4	275
7.1	335	183.60	10900	1.80	YFFAF57	4	34	0.50	6090	2756	53800	1.25	YFFAF107R77	4	295
8.3	290	157.09	11200	2.1	YFF57	4	29	0.58	5240	2369	55800	1.45	YFF107R77	4	290
9.6	250	136.16	11400	2.4	YFFF57	4	35	0.67	4570	2068	57200	1.70	YFFF107R77	4	320
10	235	127.27	11500	2.6				0.86	3510	1597	59400	2.2			
12	200	110.01	11500	3.0											
5.9	405	150.06	5750	1.00	YFFA47	6	22	0.61	5070	2245	5160	0.85	YFFA97R57	4	185
6.8	355	130.07	6530	1.15	YFFAF47	6	25	0.70	4430	1970	29500	0.95	YFFAF97R57	4	205
7.2	330	121.57	6770	1.20	YFF47	6	23	0.80	3900	1722	31000	1.10	YFF97R57	4	190
8.4	285	105.09	7190	1.40	YFFF47	6	26	0.90	3460	1527	32200	1.25	YFFF97R57	4	225
								1.0	2930	1327	33500	1.45			
6.8	350	190.76	6550	1.15	YFFA47	4	22	1.2	2650	1171	34100	1.60			
7.4	320	175.38	6850	1.25	YFFAF47	4	24	1.4	2310	1022	34800	1.85			
8.7	275	150.06	7270	1.45	YFF47	4	22	1.5	1960	898	35500	2.2			
10	240	130.07	7540	1.65	YFFF47	4	25								
11	225	121.57	7640	1.80				1.1	2870	1300	23400	1.05	YFFA87R57	4	120
12	193	105.09	7810	2.1				1.2	2550	1148	24600	1.20	YFFAF87R57	4	130
15	164	89.29	7950	2.4				1.4	2230	1010	25700	1.35	YFF87R57	4	125
								1.6	1970	887	26500	1.50	YFFF87R57	4	140
								1.8	1720	780	27200	1.75			
								2.0	1470	674	27900	2.0			
								2.3	1340	609	28200	2.2			
								2.7	1130	515	28700	2.7			
								3.0	1000	452	29000	3.0			

输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhang load outside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhang load outside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
0.37kW								0.37kW							
1.7	1810	810	13300	0.85	YFFA77R57	4	67	6.9	510	199.70	9850	1.15	YFFA57	4	30
1.9	1590	710	15100	0.95	YFFAF77R57	4	73	7.5	470	183.60	10100	1.30	YFFAF57	4	36
2.2	1390	615	16400	1.10	YFF77R37	4	71	8.8	400	157.09	10600	1.50	YFF57	4	31
2.6	1210	538	17400	1.25	YFF77R37	4	81	10	350	136.16	10900	1.70	YFF57	4	37
2.9	1080	480	18000	1.40				11	325	127.27	11000	1.85			
3.3	920	413	18600	1.65				13	280	110.01	11200	2.1			
3.8	830	367	18900	1.80				15	240	93.47	11500	2.5			
4.3	730	323	19200	2.0				17	215	83.46	11500	2.8			
3.2	980	437	5750	0.85	YFFA67R37	4	45	9.2	385	150.06	6140	1.05	YFFA47	4	22
3.6	870	384	9880	0.95	YFFAF67R37	4	51	11	335	130.07	6740	1.20	YFFAF47	4	25
4.1	770	338	10800	1.05	YFF67R37	4	47	13	270	105.09	7320	1.50	YFF47	4	23
4.5	685	305	11400	1.20	YFF67R37	4	53	15	230	89.29	7600	1.75	YFF47	4	26
5.4	575	257	12000	1.40				17	205	79.72	7750	1.95			
6.0	510	231	12400	1.60				20	174	68.09	7900	2.3			
								21	167	65.36	7930	2.4			
5.3	605	262	9170	1.00	YFFA57R37	4	41	16	220	86.53	3960	0.90	YFFA37	4	18
5.4	570	255	9420	1.05	YFFAF57R37	4	46	17	205	80.65	4200	0.95	YFFAF37	4	19
6.1	515	226	9810	1.15	YFF57R37	4	41	20	181	70.50	4550	1.10	YFF37	4	18
6.9	455	201	10200	1.30	YFF57R37	4	47	21	169	66.09	4680	1.20	YFF37	4	20
7.0	445	198	10300	1.35				24	149	58.32	4890	1.35			
7.6	405	181	10500	1.50				25	140	54.54	4970	1.45			
8.1	385	170	10700	1.55				27	132	51.70	5030	1.50			
9.1	345	152	10900	1.75				29	120	47.02	5120	1.65			
10	300	134	11100	2.0				31	112	43.83	5180	1.80			
								36	98	38.31	5270	2.0			
7.9	395	175	5990	1.00	YFFA47R17	4	25	38	92	35.91	5300	2.2			
9.4	335	147	6740	1.20	YFFAF47R17	4	27	44	81	31.69	5300	2.5			
11	295	130	7110	1.35	YFF47R17	4	26	49	72	28.09	5140	2.8			
								58	61	23.88	4930	3.3			
2.5	1410	270.68	28100	2.1	YFFA87	8	105	67	53	20.57	4740	3.8			
2.7	1330	255.37	28200	2.3	YFFAF87	8	120	72	49	19.27	4650	4.1			
3.0	1190	228.93	28600	2.5	YFF87	8	110	81	44	17.03	4500	4.6			
3.5	1020	197.20	28900	2.9	YFF87	8	125	87	41	15.81	4400	4.9			
								96	37	14.33	4280	5.4			
3.3	1060	270.68	28800	2.8	YFFA87	6	98	107	33	12.87	4150	6.1			
3.5	1000	255.37	29000	3.0	YFFAF87	6	110	125	28	11.08	3970	6.7			
3.9	900	228.93	29200	3.3	YFF87	6	105	132	27	10.42	3900	6.9			
								154	23	8.97	3730	7.6			
4.0	890	225.79	18700	1.70	YFFA77	6	59	186	19	7.44	3510	7.6			
4.5	780	198.31	19100	1.95	YFFAF77	6	66	205	17	6.74	3410	8.1			
4.8	740	188.40	19200	2.0	YFF77	6	63	228	16	6.05	3300	8.7			
5.4	655	166.47	19400	2.3	YFF77	6	74	265	13	5.21	3150	9.4			
6.3	560	142.27	19600	2.7				282	13	4.90	3090	9.6			
								327	11	4.22	2950	10			
4.9	720	281.71	19200	2.1	YFFA77	4	57	0.55kW							
5.2	675	262.93	19300	2.2	YFFAF77	4	64	0.22	20500	6295	92000	0.90	YFFA157R97	4	770
6.1	580	225.79	19500	2.6	YFF77	4	61	0.25	17400	5404	102100	1.05	YFFAF157R97	4	820
7.0	510	198.31	19700	3.0	YFF77	4	72	0.49	8930	2780	118700	2.0	YFF157R97	4	790
								0.56	7760	2427	120000	2.3	YFF157R97	4	890
4.6	765	195.39	10800	1.05	YFFA67	6	36	0.81	5520	1674	120000	3.3			
5.3	670	170.85	11500	1.20	YFFAF67	6	43	1.0	4220	1308	120000	4.3			
5.6	635	162.31	11700	1.30	YFF67	6	39	1.2	3730	1169	120000	4.8			
6.3	560	142.40	12100	1.45	YFF67	6	45								
7.4	475	120.79	12500	1.75				0.35	13300	3926	88000	0.90	YFFA127R77	4	430
								0.39	11600	3454	90000	1.05	YFFAF127R77	4	465
								0.45	10200	3031	90000	1.20	YFF127R77	4	465
6.0	585	228.99	12000	1.40	YFFA67	4	34						YFF127R77	4	510
7.1	500	195.39	12400	1.65	YFFAF67	4	41	0.57	8100	2369	48700	0.95	YFFA107R77	4	275
8.1	435	170.85	12700	1.85	YFF67	4	37	0.66	7070	2068	51400	1.10	YFFAF107R77	4	300
8.5	415	162.31	12800	1.95	YFF67	4	43	0.74	6110	1826	53800	1.25	YFF107R77	4	295
9.7	365	142.40	12900	2.2				0.85	5440	1597	55300	1.40	YFF107R77	4	320
11	310	120.79	13000	2.7				0.97	4750	1401	56900	1.60			
								1.1	4160	1243	58100	1.85			
5.7	615	157.09	9070	0.95	YFFA57	6	32	1.2	3700	1087	59000	2.1			
6.6	535	136.16	9680	1.10	YFFAF57	6	38	1.4	3180	950	60000	2.4			
7.1	500	127.27	9930	1.20	YFF57	6	33	1.6	2770	834	60800	2.8			
8.2	430	110.01	10400	1.40	YFF57	6	39	2.1	2150	640	61900	3.6			

输出转速 output speed n _a r/min	输出转矩 output torque M _a N·m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque M _a N·m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg
0.55kW								0.55kW							
1.0	4530	1327	29200	0.95	YFFA97R57	4	185	8.7	605	157.09	9150	1.00	YFFA57	4	32
1.2	4060	1171	30600	1.05	YFFAF97R57	4	210	10	525	136.16	9750	1.15	YFFAF57	4	38
1.3	3550	1022	32000	1.20	YFF97R57	4	195	11	490	127.27	9980	1.20	YFF57	4	33
1.5	3050	898	33200	1.40	YFFF97R57	4	225	12	425	110.01	10400	1.40	YFFF57	4	39
1.7	2690	784	34000	1.60				15	360	93.47	10800	1.65			
2.0	2340	690	34700	1.85				16	320	83.46	11000	1.85			
2.2	2060	605	35300	2.1				19	280	72.98	11200	2.1			
2.6	1790	529	35800	2.4				20	265	68.22	11300	2.3			
2.9	1580	467	36100	2.7				23	230	58.97	11500	2.6			
3.4	1360	406	36500	3.2											
3.7	1220	363	36700	3.5				13	405	105.09	5840	1.00	YFFA47	4	24
								15	345	89.29	6620	1.15	YFFAF47	4	27
1.5	3040	887	18200	1.00	YFFA87R57	4	120	17	310	79.72	6990	1.30	YFF47	4	25
1.7	2660	780	24200	1.15	YFFAF87R57	4	135	20	265	68.09	7370	1.50	YFFF47	4	28
2.0	2290	674	25500	1.30	YFF87R57	4	125	21	250	65.36	7440	1.60			
2.2	2080	609	26200	1.45	YFFF87R57	4	145	24	220	56.49	7670	1.85			
2.6	1750	515	27100	1.70				28	185	48.00	7850	2.2			
3.0	1540	452	27700	1.95				32	166	42.86	7940	2.4			
3.9	1160	345	28600	2.6											
								23	225	58.32	3890	0.90	YFFA37	4	20
2.5	1860	538	9980	0.80	YFFA77F37	4	69	25	210	54.54	4140	0.95	YFFAF37	4	21
2.8	1660	480	14600	0.90	YFFAF77F37	4	75	26	200	51.70	4300	1.00	YFF37	4	20
3.3	1420	413	16200	1.05	YFF77F37	4	73	29	182	47.02	4540	1.10	YFFF37	4	22
3.7	1270	367	17100	1.20	YFFF77R37	4	83	31	169	43.83	4680	1.20			
4.2	1120	323	17800	1.35				36	148	38.31	4900	1.35			
								38	139	35.91	4980	1.45			
5.3	890	257	9660	0.90	YFFA67R37	4	47	43	122	31.69	4990	1.65			
5.9	790	231	10600	1.05	YFFAF67R37	4	53	48	109	28.09	4870	1.85			
6.6	705	205	11200	1.15	YFF67R37	4	49	57	92	23.88	4700	2.2			
7.8	600	175	11900	1.35	YFFF67R37	4	55	58	91	23.63	4690	2.2			
								66	79	20.57	4540	2.5			
2.5	2140	276.77	35100	2.0	YFFA97	8	170	71	74	19.27	4470	2.7			
2.7	1960	253.41	35500	2.2	YFFAF97	8	190	80	66	17.03	4340	3.0			
3.0	1730	223.88	35900	2.5	YFF97	8	175	95	55	14.33	4150	3.6			
								106	50	12.87	4030	4.0			
2.5	2090	270.68	26200	1.45	YFFA87	8	105	123	43	11.08	3870	4.4			
2.7	1970	255.37	26500	1.50	YFFAF87	8	120	130	40	10.42	3810	4.6			
3.0	1770	228.93	27100	1.70	YFF87	8	110	152	35	8.97	3650	5.1			
3.5	1520	197.20	27800	1.95	YFFF87	8	125	170	31	8.01	3540	5.5			
								183	29	7.44	3440	5.1			
3.3	1580	270.68	27600	1.90	YFFA87	6	100	202	26	6.74	3340	5.4			
3.5	1490	255.37	27800	2.0	YFFAF87	6	115	225	23	6.05	3240	5.8			
3.9	1340	228.93	28200	2.2	YFF87	6	105	261	20	5.21	3100	6.2			
4.6	1150	197.20	28700	2.6	YFFF87	6	120	277	19	4.90	3050	6.3			
5.0	1050	179.97	28900	2.9				322	16	4.22	2920	6.8			
								361	15	3.77	2820	7.2			
								0.75kW							
4.0	1320	225.79	16800	1.15	YFFA77	6	61	0.50	12300	2780	113600	1.45	YFFA157R97	4	770
4.5	1160	198.31	17600	1.30	YFFAF77	6	68	0.57	10700	2427	116200	1.70	YFFAF157R97	4	830
4.8	1100	188.40	17900	1.35	YFF77	6	65	0.82	7580	1674	120000	2.4	YFF157R97	4	790
5.4	970	166.47	18400	1.55	YFFF77	6	76	1.1	5830	1308	120000	3.1	YFFF157R97	4	890
6.3	830	142.27	18900	1.80				1.2	5170	1169	120000	3.5			
6.9	760	130.42	19100	1.95											
								0.46	13800	3031	86900	0.85	YFFA127R77	4	430
6.0	870	225.79	18800	1.70	YFFA77	4	59	0.52	12400	2672	89600	0.95	YFFAF127R77	4	470
6.9	765	198.31	19100	1.95	YFFAF77	4	66	0.59	40900	2357	90000	1.10	YFF127R77	4	465
7.2	730	188.40	19200	2.1	YFF77	4	63	0.68	9390	2038	90000	1.30	YFFF127R77	4	510
8.2	645	166.47	19400	2.3	YFFF77	4	74	0.77	8190	1784	90000	1.45			
9.6	550	142.27	19600	2.7				0.86	7350	1606	90000	1.65			
10	505	130.42	19700	3.0											
12	440	114.45	19800	3.4											
13	420	108.46	19800	3.6											
14	365	94.93	19900	4.1											
7.0	755	195.39	10900	1.10	YFFA67	4	36								
8.0	660	170.85	11500	1.25	YFFAF67	4	43								
8.4	625	162.31	11700	1.30	YFF67	4	39								
9.6	550	142.40	12200	1.50	YFFF67	4	45								
11	465	120.79	12600	1.75											
12	420	109.04	12700	1.95											
14	370	95.94	12900	2.2											
15	350	90.59	13000	2.3											
17	310	79.76	13000	2.7											

输出转速 output speed n _a r/min	输出转矩 output torque M _a N·m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque M _a N·m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg
0.75kW								0.75kW							
0.76	8360	1826	48000	0.90	YFFA107R77	4	280	8.1	890	170.85	9670	0.90	YFFA67	4	37
0.86	7400	1597	50500	1.05	YFFA107R77	4	300	8.5	840	162.31	10100	0.95	YFFA67	4	44
0.98	6470	1401	52900	1.20	YFF107R77	4	295	9.7	740	142.40	11000	1.10	YFF67	4	40
1.1	5690	1243	54800	1.35	YFFF107R77	4	325	11	625	120.79	11700	1.30	YFFF67	4	46
1.3	5040	1087	56200	1.50				13	565	109.04	12100	1.45			
1.5	4350	950	57700	1.75				14	500	95.94	12400	1.65			
1.7	3800	834	58800	2.0				15	470	90.59	12500	1.75			
2.2	2940	640	60500	2.6				17	415	79.76	12800	2.0			
3.2	2000	436	62200	3.8				20	350	67.65	13000	2.3			
								23	315	61.07	13000	2.6			
1.4	4810	1022	22800	0.90	YFFA97R57	4	190	11	660	127.27	5290	0.90	YFFA57	4	33
1.5	4150	898	30300	1.05	YFFA97R57	4	210	13	570	110.01	9420	1.05	YFFA57	4	39
1.8	3660	784	31700	1.20	YFF97R57	4	195	15	485	93.47	10000	1.25	YFF57	4	34
2.0	3190	690	32900	1.35	YFFF97R57	4	230	17	435	83.46	10400	1.40	YFFF57	4	40
2.3	2800	605	33800	1.55				19	380	72.98	10700	1.60			
2.6	2440	529	34500	1.75				20	355	68.22	10800	1.70			
3.0	2160	467	35100	2.0				23	305	58.97	11100	1.95			
3.4	1860	406	35600	2.3				28	260	50.10	11300	2.3			
3.8	1670	363	36000	2.6				31	230	44.73	11400	2.6			
2.0	3120	674	14700	0.95	YFFA87R57	4	120	17	415	79.72	5060	0.95	YFFA47	4	25
2.3	2830	609	23600	1.05	YFFA87R57	4	135	20	355	68.09	6520	1.15	YFFA47	4	28
2.7	2390	515	25200	1.25	YFF87R57	4	130	21	340	65.36	6680	1.20	YFF47	4	26
3.0	2100	452	26100	1.45	YFFF87R57	4	145	24	295	56.49	7120	1.35	YFFF47	4	29
4.0	1590	345	27600	1.90				29	250	48.00	7470	1.60			
3.8	1720	367	14100	0.85	YFFA77R37	4	70	32	220	42.86	7640	1.80			
4.3	1520	323	15600	1.00	YFFA77R37	4	76	38	190	36.61	7820	2.1			
4.9	1310	280	16900	1.15	YFF77R37	4	74	40	178	34.29	7850	2.2			
					YFFF77R37	4	84	48	150	28.88	7540	2.7			
2.7	2640	254.40	61100	2.9	YFFA107	8	255	29	245	47.02	3530	0.80	YFFA37	4	21
					YFFA107	8	275	31	230	43.83	3850	0.90	YFFA37	4	22
					YFF107	8	270	36	199	38.31	4310	1.00	YFF37	4	21
					YFFF107	8	300	38	186	35.91	4480	1.05	YFFF37	4	23
2.5	2870	276.77	33600	1.50	YFFA97	8	180	44	165	31.69	4620	1.20			
2.7	2630	253.41	34100	1.65	YFFA97	8	200	49	146	28.09	4540	1.35			
3.1	2320	223.88	34800	1.85	YFF97	8	185	58	124	23.88	4410	1.60			
					YFFF97	8	220	67	107	20.57	4290	1.85			
3.2	2200	276.77	35000	1.95	YFFA97	6	170	72	100	19.57	4240	2.0			
3.5	2020	253.41	35400	2.1	YFFA97	6	190	81	88	17.03	4130	2.3			
4.0	1780	223.88	35800	2.4	YFF97	6	175	96	74	14.23	3970	2.7			
					YFFF97	6	210	107	67	12.87	3870	3.0			
3.3	2150	270.68	26000	1.40	YFFA87	6	105	125	58	11.08	3730	3.3			
3.5	2030	255.37	26300	1.50	YFFA87	6	120	132	57	10.42	3680	3.4			
3.9	1820	228.93	27000	1.65	YFF87	6	110	154	47	8.97	3540	3.8			
4.6	1570	197.20	27600	1.90	YFFF87	6	125	205	35	6.74	3250	4.0			
5.0	1430	179.97	28000	2.1				228	31	6.05	3150	4.3			
5.6	1270	159.61	28400	2.4				265	27	5.21	3030	4.6			
5.1	1400	270.68	28100	2.1	YFFA87	4	100	282	25	4.90	2970	4.7			
5.4	1330	255.37	28200	2.3	YFFA87	4	115	327	22	4.22	2850	5.0			
6.0	1190	228.93	28600	2.5	YFF87	4	105	366	20	3.77	2760	5.4			
					YFFF87	4	120	1.1kW							
4.5	1580	198.31	15200	0.95	YFFA77	6	66	0.50	18200	2780	99800	1.00	YFFA157R97	4	770
4.8	1500	188.40	15700	1.00	YFFA77	6	73	0.58	16000	2427	105800	1.15	YFFA157R97	4	830
5.4	1320	166.47	16800	1.15	YFF77	6	70	0.64	14300	2185	109700	1.25	YFF157R97	4	790
6.3	1130	142.27	17800	1.30	YFFF77	6	81	0.72	12700	1944	112900	1.40	YFFF157R97	4	900
6.9	1040	130.42	18200	1.45				0.84	11200	1674	115500	1.60			
								1.1	8640	1308	119000	2.1			
6.1	1170	225.79	17600	1.30	YFFA77	4	61	1.2	7680	1169	120000	2.3			
7.0	1030	198.31	18200	1.45	YFFA77	4	68	1.5	6190	953	120000	2.9			
7.3	980	188.40	18400	1.55	YFF77	4	65	1.7	5450	845	120000	3.3			
8.3	860	166.47	18800	1.75	YFFF77	4	76	3.1	2880	446	120000	6.2			
9.7	740	142.27	19200	2.0				4.6	1950	302	120000	9.2			
11	675	130.42	19300	2.2											
12	595	114.45	19500	2.5											
13	565	108.46	19600	2.7											

输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg
1.1kW								1.1kW							
0.69	13800	2038	87000	0.85	YFFA127R77	4	435	12	910	120.79	9460	0.90	YFFA67	4	42
0.79	12000	1784	90000	1.00	YFFA127R77	4	470	13	820	109.04	10300	1.00	YFFA67	4	49
0.87	10800	1606	90000	1.10	YFF127R77	4	470	14	720	95.94	11100	1.15	YFF67	4	45
1.0	9350	1390	90000	1.30	YFF127R77	4	520	15	680	90.59	11400	1.20	YFF67	4	51
1.1	8170	1220	90000	1.45				18	600	79.76	11900	1.35			
1.3	7260	1077	90000	1.65				21	510	67.65	12400	1.60			
								23	460	61.07	12600	1.80			
1.1	8360	1243	48000	0.90	YFFA107R77	4	285	26	405	53.73	12800	2.0			
1.3	7370	1087	50600	1.05	YFFA107R77	4	305	28	380	50.74	12900	2.2			
1.5	6390	950	53100	1.20	YFF107R77	4	300	32	325	43.20	13000	2.5			
1.7	5590	834	55000	1.35	YFF107R77	4	330	36	295	39.26	13000	2.7			
1.9	4910	736	56500	1.55				41	255	34.01	13000	2.9			
2.2	4310	640	57800	1.80											
2.0	4670	690	27800	0.90	YFFA97R57	4	195	17	625	83.46	8470	0.95	YFFA57	4	38
2.3	4100	605	30500	1.05	YFFA97R57	4	215	19	550	72.98	9590	1.10	YFFA57	4	44
2.7	3580	529	31900	1.20	YFF97R57	4	200	21	510	68.22	9840	1.15	YFF57	4	39
3.0	3160	467	32900	1.35	YFF97R57	4	235	24	440	58.97	10300	1.35	YFF57	4	45
3.5	2730	406	33900	1.55				28	375	50.10	10700	1.60			
3.8	2450	363	34500	1.75				31	335	44.73	10700	1.80			
								37	285	38.21	10400	2.1			
								39	270	35.79	10200	2.2			
3.1	3070	452	16900	1.00	YFFA87R57	4	125	46	225	30.15	9810	2.6			
4.1	2330	345	25400	1.30	YFFA87R57	4	140								
4.7	2020	300	26400	1.50	YFF87R57	4	135	25	425	56.49	3730	0.95	YFFA47	4	31
5.6	1670	249	27400	1.80	YFF87R57	4	150	29	360	48.00	6440	1.10	YFFA47	4	33
								33	320	42.86	6860	1.25	YFF47	4	32
2.7	3930	245.40	58600	1.95	YFFA107	8	260	38	275	36.61	7280	1.45	YFF47	4	35
3.2	3330	215.37	59800	2.3	YFFA107	8	280	41	255	34.29	7260	1.55			
3.4	3080	199.31	60200	2.5	YFF107	8	275	45	230	30.86	7130	1.75			
3.8	2760	178.64	60800	2.8	YFF107	8	300	48	220	29.32	7060	1.80			
								54	193	25.72	6880	2.1			
3.3	3160	276.77	32900	1.35	YFFA97	6	170	64	164	21.82	6640	2.4			
3.6	2890	253.41	33600	1.50	YFFA97	6	190	71	148	19.70	6490	2.7			
4.1	2560	223.88	34300	1.70	YFF97	6	175								
4.8	2170	189.92	35100	2.0	YFF97	6	210	44	240	31.69	3660	0.85	YFFA37	4	26
5.3	2000	174.87	35400	2.2				50	210	28.09	3970	0.95	YFFA37	4	27
								59	179	23.88	3930	1.10	YFF37	4	26
5.1	2080	276.77	35200	2.1	YFFA97	4	170	68	154	20.57	3870	1.30	YFF37	4	28
5.5	1900	253.41	35600	2.3	YFFA97	4	190	73	145	19.27	3840	1.40			
6.2	1680	223.88	36000	2.6	YFF97	4	175	82	128	17.03	3780	1.55			
					YFF97	4	210	98	108	14.33	3680	1.85			
3.4	3090	270.68	16000	0.95	YFFA87	6	105	109	97	12.87	3610	2.1			
3.6	2920	255.37	22700	1.05	YFFA87	6	120	126	83	11.08	3500	2.3			
4.0	2610	228.93	24400	1.15	YFF87	6	110	134	78	10.42	3460	2.4			
4.7	2250	197.20	25700	1.35	YFF87	6	125	156	67	8.97	3350	2.6			
5.1	2050	179.97	26300	1.45				175	60	8.01	3260	2.8			
5.8	1820	159.61	27000	1.65				208	51	6.74	3090	2.8			
								231	45	6.05	3010	3.0			
5.2	2030	270.68	26300	1.50	YFFA87	4	105	269	39	5.21	2900	3.2			
5.5	1920	255.37	26700	1.55	YFFA87	4	120	286	37	4.90	2860	3.3			
6.1	1720	228.93	27200	1.75	YFF87	4	110	332	32	4.22	2750	3.5			
7.1	1480	197.20	27900	2.0	YFF87	4	125	372	28	3.77	2670	3.7			
7.8	1350	179.97	28200	2.2											
8.8	1200	159.61	28500	2.5				0.58	21900	2427	86400	0.80	YFFA157R97	4	770
10	1010	134.16	29000	3.0				0.65	19700	2185	95000	0.90	YFFA157R97	4	830
11	930	123.29	29100	3.2				0.73	17500	1944	101700	1.05	YFF157R97	4	790
								0.84	15300	1674	107400	1.20	YFF157R97	4	900
7.1	1490	198.31	15800	1.00	YFFA77	4	66	1.1	11900	1308	114400	1.50			
7.4	1410	188.40	16300	1.05	YFFA77	4	73	1.2	10600	1169	116400	1.70			
8.4	1250	166.47	17200	1.20	YFF77	4	70	1.5	8540	953	119100	2.1			
9.8	1070	142.27	18000	1.40	YFF77	4	81	1.7	7530	845	120000	2.4			
11	980	130.42	18400	1.55				3.2	3980	446	120000	4.5			
12	860	114.45	18800	1.75				4.7	2690	302	120000	6.7			
13	810	108.46	18900	1.85											
15	710	94.93	19200	2.1											
16	640	85.52	19400	2.3											
19	565	75.02	19600	2.7											

输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg
1.5kW								1.5kW							
0.88	14800	1606	85000	0.80	YFFA127R77	4	435	39	370	36.58	19900	3.0	YFFA77	4	67
1.0	12800	1390	89000	0.95	YFFAF127R77	4	475	45	320	31.51	20000	4.3	YFFAF77	4	74
1.2	11200	1220	90000	1.05	YFFI27R77	4	470						YFF77	4	71
1.3	9910	1077	90000	1.20	YFFF127R77	4	520						YFFF77	4	82
1.5	8520	930	90000	1.40				16	920	90.59	9300	0.90	YFFA67	4	44
1.7	7500	820	90000	1.60				18	810	79.76	10400	1.00	YFFAF67	4	51
1.9	6630	727	90000	1.80				21	685	67.65	11400	1.20	YFF67	4	47
2.2	5960	648	90000	2.0				23	620	61.07	11800	1.30	YFFF67	4	53
								26	545	53.73	12200	1.50			
1.5	8730	950	46900	0.90	YFFA107R77	4	285	28	515	50.74	12300	1.60			
1.7	7640	834	49900	1.00	YFFAF107R77	4	305	33	440	43.20	12700	1.85			
1.9	6730	736	52300	1.15	YFFI07R77	4	300	36	400	39.26	12800	1.95			
2.2	5890	640	54300	1.30	YFFF107R77	4	330	39	370	36.30	12900	2.2			
2.5	5110	560	56100	1.50				44	325	32.08	13000	2.5			
2.9	4460	489	57500	1.70				51	280	27.41	13000	2.9			
3.2	4010	436	58400	1.90				56	255	25.13	13000	3.2			
3.8	3400	370	59600	2.3											
								24	600	58.97	9210	1.00	YFFA57	4	40
2.7	4880	529	19800	0.90	YFFA97R57	4	195	28	510	50.10	9860	1.20	YFFAF57	4	46
3.0	4310	467	29900	1.00	YFFAF97R57	4	215	32	455	44.73	9990	1.30	YFF57	4	41
3.5	3730	406	31500	1.15	YFF97R57	4	200	37	390	38.21	9740	1.55	YFFF57	4	47
3.9	3340	363	32500	1.30	YFFF97R57	4	235	39	365	35.79	9620	1.65			
								47	305	30.15	9310	1.95			
4.1	3180	345	11100	0.95	YFFA87R57	4	130								
4.7	2760	300	23900	1.10	YFFAF87R57	4	140	33	435	42.86	5750	0.90	YFFA47	4	32
5.7	2290	249	25500	1.30	YFF87R57	4	135	39	370	36.61	6300	1.10	YFFAF47	4	35
					YFRR87R57	4	150	41	350	34.29	6580	1.15	YFF47	4	33
2.8	5210	254.40	55900	1.50	YFFA107	8	265	46	315	30.86	6550	1.30	YFFF47	4	36
3.2	4410	215.37	57600	1.75	YFFAF107	8	285	48	300	29.32	6510	1.35			
3.5	4080	199.31	58300	1.90	YFFI07	8	280	49	295	28.88	6500	1.35			
3.9	3660	178.64	59100	2.1	YFFF107	8	305	55	260	25.72	6390	1.55			
								65	220	21.82	6230	1.80			
3.6	3960	254.40	58500	1.95	YFFA107	6	255	72	200	19.70	6110	2.0			
4.3	3350	215.37	59700	2.3	YFFAF107	6	275	81	176	17.33	5970	2.3			
4.6	3100	199.31	60200	2.5	YFFI07	6	270	86	166	16.36	5900	2.4			
5.2	2780	178.64	60800	2.8	YFFF107	6	300	101	142	13.93	5700	2.8			
3.3	4310	276.77	29900	1.00	YFFA97	6	180	69	210	20.57	3410	0.95	YFFA37	4	27
3.6	3950	253.41	30900	1.10	YFFAF97	6	200	73	196	19.27	3410	1.00	YFFAF37	4	29
4.1	3490	223.88	32100	1.25	YFF97	6	185	83	173	17.03	3400	1.15	YFF37	4	28
4.8	2960	189.92	33400	1.45	YFFF97	6	220	98	146	14.33	3350	1.35	YFFF37	4	29
5.3	2720	174.87	33900	1.60				110	131	12.87	3310	1.55			
								127	113	11.08	3250	1.70			
5.1	2810	276.77	33700	1.55	YFFA97	4	170	135	106	10.42	3220	1.75			
5.6	2570	253.41	34300	1.65	YFFAF97	4	190	157	91	8.97	3140	1.90			
6.3	2270	223.88	34900	1.90	YFF97	4	175	176	81	8.01	3080	2.1			
7.4	1930	189.92	35500	2.2	YFFF97	4	210	209	69	6.74	2920	2.0			
8.1	1780	174.87	35800	2.4				233	62	6.05	2850	2.2			
								271	53	5.21	2770	2.4			
5.2	2750	270.68	23900	1.10	YFFA87	4	105	288	50	4.90	2730	2.4			
5.5	2590	255.37	24500	1.15	YFFAF87	4	120	334	43	4.22	2640	2.6			
6.2	2330	228.93	25400	1.30	YFF87	4	110	374	38	3.77	2570	2.7			
7.2	2000	197.20	26400	1.50	YFFF87	4	125								
7.8	1830	179.97	26900	1.65											
8.8	1620	159.61	27500	1.85				0.98	18900	1441	97500	0.95	YFFA157R97	4	780
11	1360	134.16	28200	2.2				1.1	17600	1308	101400	1.00	YFFAF157R97	4	840
13	1110	109.49	28700	2.7				1.2	15700	1169	106500	1.15	YFFI157R97	4	800
14	990	97.89	29000	3.0				1.5	12700	953	112800	1.40	YFFF157R97	4	910
								1.7	11200	845	115400	1.60			
								1.9	10100	764	117100	1.80			
8.5	1690	166.47	14300	0.90	YFFA77	4	67	2.1	9020	680	118600	2.0			
9.9	1450	142.27	16100	1.05	YFFAF77	4	74	2.5	7610	576	120000	2.4			
11	1320	130.42	16800	1.15	YFF77	4	71	3.2	5940	446	120000	3.0			
12	1160	114.45	17600	1.30	YFFF77	4	82	4.7	4020	302	120000	4.5			
13	1100	108.46	17900	1.35				5.2	3630	273	120000	5.0			
15	960	94.93	18400	1.55				6.1	3060	232	120000	5.9			
16	870	85.52	18800	1.75				7.2	2590	197	120000	6.9			
18	760	75.02	19100	1.95											
19	735	72.50	19200	2.0											
21	675	66.46	19300	2.2											
24	595	58.32	19500	2.5											
26	560	55.27	19600	2.7											
29	490	48.37	19700	3.0											
32	445	43.58	19800	3.4											
37	390	38.23	19900	3.9											

输出转速 output speed n _a r/min	输出转矩 output torque M _a N·m	传动比 Ratio i	径向载荷 Permissible overhang load outpside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque M _a N·m	传动比 Ratio i	径向载荷 Permissible overhang load outpside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg
2.2kW								2.2kW							
1.3	14600	1077	85300	0.80	YFFAI27R77	4	445	39	545	36.58	19600	2.0	YFFA77	4	73
1.5	12600	930	89300	0.95	YFFAI27R77	4	480	45	470	31.51	19700	2.9	YFFAF77	4	79
1.7	11100	820	90000	1.10	YFFI27R77	4	480	49	430	28.75	19800	3.3	YFF77	4	77
1.9	9830	727	90000	1.20	YFFI27R77	4	520	55	380	25.50	19900	4.0	YFFF77	4	87
2.2	8810	648	90000	1.35											
2.6	7460	549	90000	1.60				23	910	61.07	9420	0.90	YFFA67	4	51
2.8	6720	495	90000	1.80				26	800	53.73	10500	1.00	YFFAF67	4	58
3.3	5810	428	90000	2.1				28	755	50.74	10800	1.10	YFF67	4	54
								33	645	43.20	11600	1.25	YFFF67	4	60
2.2	8700	640	47000	0.90	YFFAI07R77	4	290	36	585	39.26	12000	1.35			
2.5	7580	560	50100	1.00	YFFAF07R77	4	315	41	505	34.01	12400	1.45			
2.9	6610	489	52500	1.15	YFFI07R77	4	310	44	480	32.08	12500	1.70			
3.2	5930	436	54200	1.30	YFFF07R77	4	335	51	410	27.41	12800	2.0			
3.8	5030	370	56300	1.55				56	375	25.13	12900	2.2			
4.2	4520	333	57300	1.70				64	330	22.05	13000	2.5			
								67	310	20.90	13000	2.6			
3.9	4940	363	16500	0.85	YFFA97R57	4	200	77	275	18.29	13000	3.0			
4.9	3890	285	31100	1.10	YFFAF97R57	4	225								
5.8	3340	245	32500	1.30	YFFI97R57	4	210	32	665	44.73	4480	0.90	YFFA57	4	47
								37	570	38.21	8660	1.05	YFFAF57	4	53
2.8	7640	254.40	49900	1.00	YFFAI07	8	270	39	535	35.79	8620	1.15	YFF57	4	48
3.2	6460	215.37	52900	1.20	YFFAF07	8	290	47	450	30.15	8460	1.30	YFFF57	4	54
3.5	5980	199.31	54100	1.30	YFFI07	8	285	56	370	24.96	8240	1.55			
3.9	5360	178.64	55500	1.45	YFFF07	8	315	67	315	21.17	8020	1.90			
								74	285	19.11	7870	2.1			
3.7	5690	254.40	54800	1.35	YFFAI07	6	265	84	250	16.81	7670	2.4			
4.4	4810	215.37	56700	1.60	YFFAF07	6	285	89	235	15.88	7580	2.5			
4.7	4450	199.31	57500	1.70	YFFI07	6	280								
5.3	3990	178.64	58400	1.90	YFFF07	6	305	55	385	25.72	5560	1.05	YFFA47	4	38
								65	325	21.82	5520	1.25	YFFAF47	4	40
5.5	3790	254.40	58900	2.0	YFFAI07	4	255	72	295	19.70	5480	1.35	YFF47	4	38
6.6	3210	215.37	60000	2.4	YFFAF07	4	275	81	260	17.33	5410	1.55	YFFF47	4	42
7.1	2970	199.31	60400	2.6	YFFI07	4	270	86	245	16.36	5370	1.65			
7.9	2660	178.64	61000	2.9	YFFF07	4	300	101	210	13.93	5250	1.95			
								111	189	12.66	5170	2.1			
4.2	5000	223.88	12400	0.85	YFFA97	6	190	129	163	10.97	5040	2.5			
4.9	4240	189.92	30100	1.00	YFFAF97	6	210	157	133	8.96	4740	2.5			
5.4	3910	174.87	31000	1.10	YFF97	6	195								
6.0	3490	156.30	32100	1.25	YFFF97	6	230	98	215	14.33	2790	0.95	YFFA37	4	33
								110	192	12.87	2810	1.05	YFFAF37	4	35
5.1	4120	276.77	30400	1.05	YFFA97	4	180	127	165	11.08	2820	1.15	YFF37	4	34
5.6	3780	253.41	31400	1.15	YFFAF97	4	200	135	155	10.42	2810	1.20	YFFF37	4	36
6.3	3340	223.88	32500	1.30	YFF97	4	185	157	134	8.97	2790	1.30			
7.4	2830	189.92	33700	1.50	YFFF97	4	220	176	119	8.01	2770	1.40			
8.1	2610	174.87	34200	1.65				209	100	6.74	2630	1.40			
9.0	2330	156.30	34800	1.85				233	90	6.05	2590	1.50			
10	2100	140.71	35200	2.0				271	78	5.21	2540	1.60			
11	1900	127.42	35600	2.3				288	73	4.90	2520	1.65			
								334	63	4.22	2460	1.75			
7.2	2940	197.20	22000	1.00	YFFA87	4	115	374	56	3.77	2400	1.85			
7.8	2680	179.97	24200	1.10	YFFAF87	4	125								
8.8	2380	159.61	25200	1.25	YFF87	4	120								
11	2000	134.16	26400	1.50	YFFF87	4	135	1.2	21700	1169	87200	0.85	YFFAI57R97	4	780
13	1630	109.49	27500	1.85				1.5	17600	953	101300	1.00	YFFAF57R97	4	840
14	1460	97.89	27900	2.1				1.7	15600	845	106700	1.15	YFFI57R97	4	800
16	1310	88.01	28300	2.3				1.8	14100	764	110100	1.30	YFFF57R97	4	910
18	1140	76.39	27800	2.6				2.1	12500	680	113200	1.45			
21	1020	68.40	27100	2.9				2.4	10600	576	116400	1.70			
25	850	56.75	25900	3.5				3.1	8250	446	110500	2.2			
28	750	50.36	25200	3.9				4.6	5580	302	120000	3.2			
31	675	45.28	24500	4.2				5.1	5040	273	120000	3.6			
								6.1	4250	232	120000	4.2			
								7.1	3610	197	120000	5.0			
12	1710	114.45	14200	0.90	YFFA77	4	74								
13	1620	108.46	14900	0.95	YFFAF77	4	81	1.9	13600	727	87400	0.90	YFFAI27R77	4	445
15	1410	94.93	16300	1.05	YFF77	4	78	2.2	12200	648	90000	1.00	YFFAFI27R77	4	485
16	1270	85.52	17100	1.20	YFFF77	4	89	2.5	10300	549	90000	1.15	YFFI27R77	4	485
19	1120	75.02	17800	1.35				2.8	9270	495	90000	1.30	YFFFI27R77	4	530
21	990	66.46	18300	1.50											
24	870	58.32	18800	1.75				3.2	8170	436	48500	0.95	YFFAI07R77	4	295
26	820	55.27	18900	1.80				3.8	6930	370	51800	1.10	YFFAF07R77	4	315
29	720	48.37	19200	2.1				4.2	6240	333	53500	1.25	YFFI07R77	4	310
32	650	43.58	19400	2.3				4.8	5460	291	55300	1.45	YFFF07R77	4	340

输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
3kW								3kW							
3.7	7750	254.40	49600	1.00	YFFA107	6	270	71	405	19.70	4750	1.00	YFFA47	4	42
4.4	6560	215.37	52700	1.15	YFFA107	6	290	81	355	17.33	4760	1.15	YFFA47	4	44
4.7	6070	199.31	53900	1.25	YFF107	6	285	86	335	16.36	4760	1.20	YFF47	4	42
5.3	5440	178.64	55300	1.40	YFFF107	6	315	100	285	13.93	4740	1.40	YFFF47	4	46
								111	260	12.66	4700	1.55			
5.5	5210	254.40	55900	1.50	YFFA107	4	260	128	225	10.97	4640	1.80			
6.5	4410	215.37	57600	1.75	YFFA107	4	280	156	183	8.96	4370	1.80			
7.0	4080	199.31	58300	1.90	YFF107	4	275	126	225	11.08	2320	0.85	YFFA37	4	37
7.8	3660	178.64	59100	2.1	YFFF107	4	300	134	215	10.42	2350	0.85	YFFA37	4	39
8.7	3300	161.28	59800	2.3				156	184	8.97	2390	0.95	YFF37	4	38
								175	164	8.01	2410	1.05	YFFF37	4	40
6.2	4580	223.88	29000	0.95	YFFA97	4	180	208	138	6.74	2290	1.00			
7.4	3890	189.92	31100	1.10	YFFA97	4	205	231	124	6.05	2300	1.10			
8.0	3580	174.87	31900	1.20	YFF97	4	190	269	107	5.21	2290	1.15			
9.0	3200	156.30	32800	1.35	YFFF97	4	220	286	100	4.90	2280	1.20			
9.9	2880	140.71	33600	1.50				332	86	4.22	2250	1.25			
11	2610	127.42	34200	1.65				372	77	3.77	2220	1.35			
12	2310	112.99	34800	1.85				4kW							
14	2090	102.16	35200	2.1				1.7	20600	845	91500	0.85	YFFA157R97	4	790
16	1840	89.85	35700	2.3				1.9	18600	764	98300	0.95	YFFA157R97	4	850
								2.1	16600	680	104200	1.10	YFF157R97	4	810
10	2750	134.16	23900	1.10	YFFA87	4	120	2.5	14000	576	110300	1.30	YFFF157R97	4	920
11	2520	123.29	24700	1.20	YFFA87	4	130	3.2	10900	446	115900	1.65			
13	2240	109.49	25700	1.35	YFF87	4	125	4.7	7390	302	120000	2.4			
14	2000	97.89	26400	1.50	YFFF87	4	140	5.2	6670	273	120000	2.7			
16	1800	88.01	26900	1.65				6.1	5640	232	120000	3.2			
18	1560	76.39	26300	1.90				7.2	4780	197	120000	3.8			
20	1400	68.40	25700	2.1				2.6	13600	549	87400	0.90	YFFA127R77	4	455
25	1160	56.75	24800	2.6				2.9	12200	495	90000	1.00	YFFA127R77	4	490
28	1030	50.36	24100	2.8				3.3	10600	428	90000	1.15	YFF127R77	4	490
								3.8	9270	376	90000	1.30	YFFF127R77	4	530
16	1750	85.52	13800	0.85	YFFA77	4	78	4.3	8230	333	48300	0.95	YFFA107R77	4	300
19	1540	75.02	15500	1.00	YFFA77	4	85	4.9	7190	291	51100	1.05	YFFA107R77	4	325
21	1360	66.46	16600	1.10	YFF77	4	82	5.6	6310	255	53300	1.20	YFF107R77	4	320
24	1190	58.32	17500	1.25	YFFF77	4	93						YFFF107R77	4	345
25	1130	55.27	17800	1.35				4.2	9060	170.83	90000	1.30	YFFA127	8	445
29	990	48.37	18300	1.50				4.7	8150	153.67	90000	1.45	YFFA127	8	485
32	890	43.58	18700	1.70				5.7	6650	125.37	90000	1.80	YFF127	8	485
37	780	38.23	19000	1.90									YFFF127	8	530
38	750	36.58	19100	1.50				5.6	6840	254.40	52000	1.10	YFFA107	4	265
44	645	31.51	19400	2.1				6.6	5790	215.37	54500	1.35	YFFA107	4	285
49	590	28.75	19500	2.4				7.1	5360	199.31	55500	1.45	YFF107	4	280
55	520	25.50	19700	2.9				7.9	4810	178.64	56700	1.60	YFFF107	4	305
65	440	21.43	19800	3.4				8.8	4340	161.28	57700	1.75			
								9.7	3940	146.49	58500	1.95			
32	880	43.20	9690	0.95	YFFA67	4	55	11	3500	129.97	59400	2.2			
36	800	39.26	10500	0.95	YFFA67	4	62	12	3170	117.94	60100	2.4			
41	695	34.01	11300	1.05	YFF67	4	58	14	2730	101.38	60900	2.8			
44	655	32.08	11600	1.25	YFFF67	4	64	8.1	4700	174.87	26600	0.90	YFFA97	4	190
51	560	27.41	12100	1.45				9.1	4200	156.30	30200	1.00	YFFA97	4	210
56	515	25.13	12300	1.60				10	3780	140.71	31400	1.15	YFF97	4	195
63	450	22.05	12600	1.80				11	3430	127.42	32300	1.25	YFFF97	4	230
67	430	20.90	12700	1.90				13	3040	112.99	33200	1.40			
77	375	18.29	12900	2.2				14	2750	102.16	33900	1.55			
85	335	16.48	13000	2.4				15	2620	97.58	34100	1.65			
97	295	14.46	13000	2.8				16	2420	89.85	34600	1.80			
								18	2160	80.31	35100	2.0			
56	510	24.96	7440	1.15	YFFA57	4	51	20	1940	72.29	35500	2.2			
66	435	21.17	7340	1.40	YFFA57	4	56	22	1760	65.47	35800	2.4			
73	390	19.11	7260	1.55	YFF57	4	51	13	2950	109.49	21700	1.00	YFFA87	4	125
83	345	16.81	7140	1.75	YFFF57	4	57	15	2630	97.89	24300	1.15	YFFA87	4	135
88	325	15.88	7080	1.85				16	2370	88.01	24600	1.25	YFF87	4	130
104	275	13.52	6890	2.2				19	2050	76.39	24200	1.45	YFFF87	4	145
114	250	12.29	6780	2.4				21	1840	68.40	23900	1.65			
132	220	10.64	6590	2.8				25	1530	56.75	23200	1.95			
								28	1350	50.36	22800	2.2			
								31	1220	45.28	22300	2.3			

输出转速 output speed na r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outside Pa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed na r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outside Pa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
4kW								5.5kW							
21	1790	66.46	13400	0.85	YFFA77	4	84	2.7	19800	267.43	94600	0.90	YFFAI57	8	710
24	1570	58.32	15200	0.95	YFFAF77	4	91	3.3	16100	217.62	105500	1.10	YFFAF57	8	770
26	1490	55.27	15800	1.00	YFF77	4	88	4.0	13200	178.20	111900	1.35	YFF57	8	730
29	1300	48.37	16900	1.15	YFFF77	4	99	4.4	12100	162.96	114000	1.50	YFFF57	8	840
33	1170	43.58	17600	1.30				5.0	10500	141.80	116600	1.70			
37	1030	38.23	18200	1.45				5.7	9260	125.14	118300	1.95			
42	910	33.74	18600	1.65				6.5	8030	108.49	119700	2.2			
45	850	31.51	18800	1.65				7.4	7140	96.53	120000	2.5			
47	800	29.91	19000	1.85				8.3	6350	85.80	120000	2.8			
49	775	28.75	19100	1.85				9.1	5800	78.46	120000	3.1			
56	685	25.50	19300	2.2				10	5050	68.28	120000	3.6			
66	575	21.43	19500	2.6											
72	530	19.70	19600	2.8				4.2	12600	170.83	89200	0.95	YFFAI27	8	450
								4.6	11400	153.67	90000	1.05	YFFAF27	8	490
52	735	27.41	11000	1.10	YFFA67	4	61	5.7	9270	125.37	90000	1.30	YFFI27	8	485
57	675	25.13	11400	1.20	YFFAF67	4	67	6.2	8460	114.34	90000	1.40	YFFFI27	8	530
64	595	22.05	11900	1.40	YFF67	4	64								
68	560	20.90	12100	1.45	YFFF67	4	70	6.6	7910	215.37	49200	0.95	YFFAI07	4	270
78	490	18.29	12400	1.65				7.2	7320	199.31	50800	1.05	YFFAF07	4	290
86	445	16.48	12700	1.85				8.0	6560	178.64	52700	1.15	YFFI07	4	285
98	390	14.46	12900	2.1				8.9	5920	161.28	54200	1.30	YFFFI07	4	315
111	345	12.76	13000	2.4				9.8	5380	146.49	55500	1.45			
126	305	11.31	13000	2.7				11	4770	129.97	56800	1.60			
147	260	9.66	13000	3.2				12	4330	117.94	57700	1.75			
156	245	9.08	13000	2.2				14	3720	101.38	59000	2.1			
165	230	8.60	12800	2.5				15	3400	92.47	59600	2.3			
189	205	7.53	12400	3.0				16	3250	88.49	59900	2.4			
209	183	6.78	12100	3.4				17	3080	83.99	60200	2.5			
239	160	5.95	11700	3.8											
270	141	5.25	11400	4.2				11	4680	127.42	27400	0.90	YFFA97	4	195
305	125	4.66	11000	4.5				13	4150	112.99	30300	1.05	YFFAF97	4	215
357	107	3.97	10600	4.7				14	3750	102.16	31400	1.15	YFF97	4	200
								15	3580	97.58	31900	1.20	YFFF97	4	235
67	570	21.17	6490	1.05	YFFA57	4	58	16	3300	89.85	32600	1.30			
74	515	19.11	6490	1.15	YFFAF57	4	63	17	3180	86.59	32900	1.35			
84	450	16.81	6450	1.35	YFF57	4	58	18	2950	80.31	33400	1.45			
89	425	15.88	6430	1.40	YFFF57	4	64	19	2780	75.63	33800	1.55			
105	365	13.52	6340	1.65				20	2660	72.29	34100	1.60			
116	330	12.29	6270	1.80				22	2400	65.47	34600	1.80			
133	285	10.64	6150	2.1				25	2130	58.06	34500	2.0			
153	250	9.31	5850	1.70				27	1930	52.49	33900	2.2			
173	220	8.19	5730	1.90											
184	210	7.73	5680	2.0				16	3230	88.01	5760	0.95	YFFA87	4	130
216	177	6.58	5510	2.4				19	2810	76.39	21200	1.05	YFFAF87	4	140
237	161	5.98	5410	2.6				21	2510	68.40	21200	1.20	YFF87	4	135
274	139	5.18	5250	3.0				25	2080	56.75	21000	1.45	YFFF87	4	150
5.5kw								28	1850	50.36	20800	1.60			
2.5	19300	576	96300	0.95	YFFAI57R97	4	800	32	1660	45.28	20500	1.70			
2.8	16800	503	103600	1.05	YFFAF57R97	4	850	36	1440	39.30	20100	1.90			
3.2	15000	446	108200	1.20	YFFI57R97	4	820	41	1290	35.19	19800	2.0			
4.1	11800	353	114500	1.55	YFFFI57R97	4	920	42	1250	33.92	19700	2.1			
4.7	10100	302	117100	1.80				49	1070	29.20	19100	2.3			
5.2	9160	273	118400	1.95				50	1060	28.78	19100	2.3			
6.2	7750	232	120000	2.3				54	970	26.50	18800	3.1			
7.1	6750	202	120000	2.7				60	870	23.68	18400	3.5			
7.3	6570	197	120000	2.7											
3.4	14000	418	86500	0.85	YFFAI27R87	4	480	30	1780	48.37	13500	0.85	YFFA77	4	91
3.8	12600	374	89400	0.95	YFFAF27R87	4	520	33	1600	43.58	15000	0.95	YFFAF77	4	98
4.6	10500	312	90000	1.15	YFFI27R87	4	520	37	1400	38.23	16300	1.05	YFF77	4	95
4.9	9840	293	90000	1.20	YFFFI27R87	4	560	42	1240	33.74	17300	1.20	YFFF77	4	105
5.5	8680	259	90000	1.40				48	1100	29.91	17900	1.35			
6.4	7500	223	90000	1.60				56	940	25.54	18500	1.55			
								67	785	21.43	19000	1.90			
								73	725	19.70	19200	2.1			
								82	645	17.49	19400	2.3			
3.3	14500	428	85600	0.85	YFFAI27R77	4	460	91	575	15.64	19600	2.6			
3.8	12700	376	89100	0.95	YFFAF27R77	4	495	102	515	14.06	19300	2.9			
					YFFI27R77	4	495	117	450	12.20	18600	3.3			
					YFFFI27R77	4	540								

输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
5.5kW								7.5kW							
65	810	22.05	10400	1.00	YFFA67	4	66	8.4	8560	170.83	90000	1.40	YFFA127	4	435
68	770	20.90	10800	1.05	YFFAF67	4	72	9.3	7700	153.67	90000	1.55	YFFAF127	4	475
78	670	18.29	11500	1.20	YFF67	4	69	11	6280	125.37	90000	1.90	YFF127	4	475
87	605	16.48	11900	1.35	YFFF67	4	75						YFFF127	4	520
99	530	14.46	12300	1.55				8.0	8950	178.64	46300	0.85	YFFA107	4	290
112	470	12.76	12500	1.75				8.9	8080	161.28	48700	0.95	YFFAF107	4	310
126	415	11.31	12800	1.95				9.8	7340	146.49	50700	1.05	YFF107	4	305
148	355	9.66	12900	2.3				11	6510	129.97	52800	1.20	YFFF107	4	335
158	335	9.08	12400	1.60				12	5910	117.94	54200	1.30			
166	315	8.60	12300	1.80				14	5080	101.38	56100	1.50			
190	275	7.53	12000	2.2				15	4630	92.47	57100	1.65			
211	250	6.78	11700	2.5				16	4430	88.49	57500	1.75			
240	220	5.95	11400	2.8				17	4210	83.99	58000	1.85			
272	193	5.25	11100	3.1				19	3730	74.52	59000	2.1			
307	171	4.66	10700	3.3				21	3390	67.62	59600	2.3			
360	146	3.97	10300	3.4											
85	620	16.81	5450	0.95	YFFA57	4	63	15	4890	97.58	19300	0.90	YFFA97	4	215
90	585	15.88	5480	1.05	YFFAF57	4	68	16	4500	89.85	29300	0.95	YFFAF97	4	235
106	495	13.52	5530	1.20	YFF57	4	63	17	4340	86.59	29800	1.00	YFF97	4	220
116	450	12.29	5530	1.35	YFFF57	4	69	18	4020	80.31	30700	1.05	YFFF97	4	255
134	390	10.64	5510	1.55				19	3790	75.63	31300	1.15			
175	300	8.19	5190	1.40				20	3620	72.29	31800	1.20			
185	285	7.73	5160	1.50				22	3280	65.47	32200	1.30			
217	240	6.58	5070	1.75				25	2910	58.06	31800	1.50			
239	220	5.98	5010	1.90				27	2630	52.49	31400	1.65			
276	190	5.18	4900	2.2				32	2230	44.49	30600	1.95			
4.6	14300	312	85900	0.85	YFFA127R87	4	500	33	2170	43.28	30500	2.2			
4.9	13500	293	87600	0.90	YFFAF127R87	4	540	37	1950	38.86	29900	1.40			
5.5	11900	259	90000	1.00	YFF127R87	4	540	39	1840	36.64	29600	1.65			
6.4	10300	223	90000	1.15	YFFF127R87	4	580	42	1700	33.91	29200	2.5			
7.2	9080	198	90000	1.30				44	1630	32.50	28900	2.6			
3.3	21600	217.62	87600	0.85	YFFA157	8	740	47	1520	30.39	28500	2.8			
4.0	17700	178.20	101100	1.00	YFFAF157	8	800	25	2840	56.75	18100	1.05	YFFA87	4	150
4.4	16200	162.96	105200	1.10	YFF157	8	760	28	2520	50.36	18200	1.15	YFFAF87	4	165
5.1	14100	141.80	110100	1.30	YFFF157	8	870	32	2270	45.28	18200	1.25	YFF87	4	155
5.8	12400	125.14	113300	1.45				36	1970	39.30	18100	1.40	YFFF87	4	170
6.6	10800	108.49	116100	1.65				41	1760	35.19	18000	1.50			
7.5	9600	96.53	117800	1.85				49	1460	29.20	17600	1.70			
8.4	8530	85.80	119200	2.1				50	1440	28.78	17600	1.70			
9.2	7810	78.46	120000	2.3				54	1330	26.50	17400	2.3			
11	6790	68.28	120000	2.7				60	1190	23.68	17100	2.5			
12	5990	60.25	120000	3.0				67	1070	21.32	16800	2.8			
14	5200	52.24	120000	3.5				74	970	19.31	16500	3.1			
15	4620	46.48	120000	3.9				84	860	17.12	16200	3.5			
18	3980	40.06	120000	4.5				92	775	15.48	15900	3.9			
3.6	20000	267.43	94000	0.90	YFFA157	6	710	42	1690	33.74	14300	0.90	YFFA77	4	110
4.4	16200	217.62	105100	1.10	YFFAF157	6	770	48	1500	29.91	15700	1.00	YFFAF77	4	120
5.4	13300	178.20	111700	1.35	YFF157	6	730	56	1280	25.50	17100	1.15	YFF77	4	115
5.9	12200	162.96	113800	1.50	YFFF157	6	840	67	1070	21.43	18000	1.40	YFFF77	4	125
6.8	10600	141.80	116400	1.70				73	990	19.70	18400	1.50			
7.7	9340	125.14	118200	1.95				82	880	17.49	18800	1.70			
8.9	8090	108.49	119700	2.2				91	785	15.64	19000	1.90			
9.9	7200	96.53	120000	2.5				102	705	14.06	18600	2.1			
11	6400	85.80	120000	2.8				117	610	12.20	18000	2.5			
12	5850	78.46	120000	3.1				131	545	10.93	17600	2.7			
14	5090	68.28	120000	3.5				154	465	9.30	16500	2.3			
16	4500	60.25	120000	4.0				173	415	8.26	16100	2.6			
18	3900	52.24	119300	4.6				194	370	7.39	15700	2.9			
5.7	12500	125.37	89500	0.95	YFFA127	8	485	215	335	6.64	15300	3.2			
6.3	11400	114.34	90000	1.05	YFFAF127	8	520	248	290	5.76	14800	3.7			
7.3	9840	98.95	90000	1.20	YFF127	8	520	277	260	5.16	14500	4.2			
8.2	8690	87.31	90000	1.40	YFFF127	8	570	334	215	4.28	13800	4.7			
5.6	12700	170.83	89000	0.95	YFFA127	6	450								
6.2	11500	153.67	90000	1.05	YFFAF127	6	490								
7.7	9350	125.37	90000	1.30	YFF127	6	485								
8.4	8530	114.34	90000	1.40	YFFF127	6	530								

输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg
11kW								11kW							
4.8	20300	302	92800	0.90	YFFAI57R97	4	830	42	2470	33.91	26400	1.75	YFFA97	4	225
5.3	18300	273	99300	1.00	YFFAF57R97	4	890	47	2220	30.39	26000	1.95	YFFAF97	4	245
6.2	15500	232	106900	1.15	YFFI57R97	4	850	52	2000	27.44	25600	2.2	YFFI97	4	230
7.1	13500	202	111200	1.35	YFFF57R97	4	960	58	1820	24.92	25200	2.4	YFFF97	4	265
7.3	13200	197	112000	1.35				65	1610	22.11	24700	2.7			
6.4	15000	223	84500	0.80	YFFAI27R87	4	510	37	2870	39.30	14600	0.95	YFFA87	4	165
7.3	13300	198	88000	0.90	YFFAF27R87	4	550	41	2570	35.19	14800	1.00	YFFAF87	4	175
8.7	11100	166	90000	1.10	YFFI27R87	4	550	49	2130	29.20	15000	1.20	YFFI87	4	170
					YFFF27R87	4	600	54	1930	26.50	15000	1.55	YFFF87	4	185
5.1	20700	141.80	91300	0.85	YFFAI57	8	810	61	1730	23.68	15000	1.75			
5.8	18300	125.14	99500	1.00	YFFAF57	8	870	68	1560	21.32	14900	1.95			
6.6	15800	108.49	106100	1.15	YFFI57	8	830	75	1410	19.31	14800	2.1			
7.5	14100	96.53	110100	1.30	YFFF57	8	940	84	1250	17.12	14600	2.4			
								93	1130	15.48	14400	2.7			
5.4	19500	178.20	95500	0.90	YFFAI57	6	740	110	960	13.12	14100	3.1			
5.9	17800	162.96	100800	1.00	YFFAF57	6	800								
6.8	15500	141.80	106900	1.15	YFFI57	6	760	73	1440	19.70	16100	1.05	YFFA77	4	125
7.7	13700	125.14	110900	1.30	YFFF57	6	870	82	1280	17.49	17100	1.20	YFFAF77	4	130
8.9	11900	108.49	114300	1.50				92	1140	15.64	17600	1.30	YFF77	4	130
9.9	10600	96.53	116400	1.70				102	1030	14.06	17400	1.45	YFFF77	4	140
11	9390	85.80	118100	1.90				118	890	12.20	17000	1.70			
12	8590	78.46	119100	2.1				132	795	10.93	16700	1.90			
								155	680	9.30	15500	1.60			
5.4	19500	267.43	95500	0.90	YFFAI57	4	710	174	605	8.20	15200	1.80			
6.6	15900	217.62	106000	1.15	YFFAF57	4	770	195	540	7.39	14900	2.0			
8.1	13000	178.20	112300	1.40	YFFI57	4	730	217	485	6.64	14600	2.2			
8.8	11900	162.96	114300	1.50	YFFF57	4	840	250	420	5.76	14200	2.6			
10	10300	141.80	116800	1.75				279	375	5.16	13900	2.9			
12	9130	125.14	118400	1.95				336	310	4.28	13300	3.2			
13	7910	108.49	119900	2.3				15kW							
15	7040	96.53	120000	2.6				6.3	20900	232	90400	0.85	YFFAI57R97	4	870
17	6260	85.80	118100	2.9				7.2	18300	202	99500	1.00	YFFAF57R97	4	930
18	5720	78.46	115700	3.1				7.4	17700	197	101000	1.00	YFFI57R97	4	890
21	4980	68.28	112000	3.6									YFFF57R97	4	1000
								6.8	20900	141.80	90400	0.85	YFFAI57	6	810
7.7	13700	125.37	87100	0.85	YFFAI27	6	485	7.8	18500	125.14	98800	0.95	YFFAF57	6	870
8.4	12500	114.34	89500	0.95	YFFAF27	6	520	8.9	16000	108.49	105700	1.10	YFFI57	6	830
9.7	10800	98.95	90000	1.10	YFFI27	6	520	10	14300	96.53	109800	1.25	YFFF57	6	940
11	9550	87.31	90000	1.25	YFFF27	6	570	11	12700	85.80	112900	1.40			
13	8250	75.41	90000	1.45											
								6.7	21400	217.62	88800	0.85	YFFAI57	4	740
8.4	12500	170.83	89500	0.95	YFFAI27	4	450	8.2	17500	178.20	101800	1.05	YFFAF57	4	800
9.4	11200	153.67	90000	1.05	YFFAF27	4	490	9.0	16000	162.96	105700	1.15	YFFI57	4	760
11	9150	125.37	90000	1.30	YFFI27	4	485	10	13900	141.80	110500	1.30	YFFF57	4	870
13	8340	114.34	90000	1.45	YFFF27	4	530	12	12300	125.14	113600	1.45			
15	7220	98.95	90000	1.65				13	10600	108.49	116300	1.70			
16	6370	87.31	90000	1.90				15	9470	96.53	115800	1.90			
19	5500	75.41	88600	2.2				17	8420	85.80	113200	2.1			
								19	7700	78.46	111200	2.3			
12	8600	117.94	47300	0.90	YFFAI07	4	305	21	6700	68.28	108000	2.7			
14	7400	101.38	50600	1.05	YFFAF07	4	325	24	5910	60.25	105100	3.0			
16	6750	92.47	52200	1.15	YFFI07	4	320								
17	6130	83.99	53700	1.25	YFFF07	4	345	9.8	14600	98.95	85300	0.80	YFFAI27	6	550
19	5440	74.52	55300	1.40				11	12900	87.31	88700	0.95	YFFAF27	6	590
21	4930	67.62	56500	1.55				13	11100	75.41	88300	1.10	YFFI27	6	590
25	4240	58.12	56400	1.80				14	10300	70.07	87600	1.15	YFFF27	6	630
28	3700	50.73	55100	2.1				15	9440	63.91	86700	1.25			
33	3140	43.03	53500	2.5											
43	2470	33.79	51000	3.0				12	12300	125.37	89000	1.00	YFFAI27	4	485
52	2010	27.57	48800	3.9				13	11200	114.34	88300	1.05	YFFAF27	4	520
57	1830	25.14	47800	4.3				15	9710	98.95	87000	1.25	YFFI27	4	520
								17	8570	87.31	85600	1.40	YFFF27	4	570
22	4780	65.47	24000	0.90	YFFA97	4	230	21	6870	70.07	82800	1.75			
25	4240	58.06	27100	1.00	YFFAF97	4	250								
27	3830	52.49	27100	1.10	YFFI97	4	235	16	9070	92.47	45900	0.85	YFFAI07	4	345
32	3250	44.49	27000	1.30	YFFF97	4	270	17	8680	88.49	47100	0.90	YFFAF07	4	365
37	2830	38.86	26700	1.50				18	8240	83.99	48300	0.95	YFFI07	4	360
44	2370	32.50	26200	1.80				20	7310	74.52	50800	1.05	YFFF07	4	390
								22	6630	67.62	52500	1.15			

输出转速 output speed n _a r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg
15kW								18.5kW							
25	5700	58.12	52200	1.35	YFFA107	4	345	34	5190	43.03	47700	1.50	YFFA107	4	395
29	4980	50.73	51500	1.55	YFFAF107	4	365	39	4540	37.61	47000	1.70	YFFAF107	4	415
34	4220	43.03	50400	1.80	YFF107	4	360	43	4070	33.79	46400	1.80	YFF107	4	410
39	3690	37.61	49300	2.1	YFFF107	4	390	46	3830	31.80	46000	2.0	YFFF107	4	440
43	3320	33.79	48500	2.2				53	3320	27.57	45000	2.4			
46	3120	31.80	48000	2.5				58	3030	25.14	44300	2.6			
53	2700	27.57	46700	2.9				67	2620	21.76	43200	3.0			
58	2470	25.14	45900	3.2											
67	2130	21.76	44500	3.7				38	4690	38.86	20000	0.90	YFFA97	4	320
								45	3920	32.50	20600	1.10	YFFAF97	4	340
33	4360	44.49	22900	1.00	YFFA97	4	270	53	3310	27.44	20900	1.30	YFF97	4	325
38	3810	38.86	23100	1.15	YFFAF97	4	290	59	3010	24.92	20900	1.45	YFFF97	4	360
43	3330	33.91	23200	1.30	YFF97	4	275	66	2670	22.11	20900	1.60			
45	3190	32.50	23200	1.35	YFFF97	4	310	73	2420	20.07	20800	1.80			
48	2980	30.39	23200	1.45				85	2080	17.25	20500	2.1			
53	2690	27.44	23100	1.60				97	1820	15.06	20200	2.4			
59	2450	24.92	22900	1.75				115	1540	12.77	19800	2.8			
66	2170	22.11	22600	2.0				131	1350	11.16	19300	3.0			
73	1970	20.07	22400	2.2											
85	1690	17.25	21900	2.5				69	2570	21.32	10900	1.15	YFFA87	4	250
97	1480	15.06	21400	2.9				76	2330	19.31	11100	1.30	YFFAF87	4	265
114	1250	12.77	20800	3.4				86	2060	17.12	11400	1.45	YFF87	4	255
131	1100	11.16	20200	3.7				95	1870	15.48	11500	1.60	YFFF87	4	270
								112	1580	13.12	11600	1.90			
55	2600	26.50	12300	1.15	YFFA87	4	200	128	1380	11.46	11600	2.2			
62	2320	23.68	12600	1.30	YFFAF87	4	215	153	1160	9.58	11500	2.5			
68	2090	21.32	12700	1.45	YFF87	4	205	177	1000	8.29	10900	1.55			
76	1890	19.31	12800	1.60	YFFF87	4	220	199	890	7.35	10800	1.75			
85	1680	17.12	12900	1.80				220	800	6.65	10700	1.90			
94	1520	15.48	12800	2.0				260	680	5.63	10400	2.2			
111	1290	13.12	12700	2.3				298	595	4.92	10200	2.6			
127	1120	11.46	12600	2.7				356	495	4.12	9900	2.9			
152	940	9.58	12300	3.1				22kW							
176	810	8.29	11700	1.90				10	20900	96.53	90500	0.85	YFFA157	6	860
199	720	7.35	11500	2.1				11	18600	85.80	98500	0.95	YFFAF157	6	920
220	650	6.65	11300	2.3				12	17000	78.46	103100	1.05	YFF157	6	880
259	555	5.63	11000	2.8				14	14800	68.28	107700	1.20	YFFF157	6	990
297	485	4.92	10700	3.2											
355	405	4.12	10300	3.6				10	20300	141.80	92600	0.90	YFFA157	4	810
18.5kW								12	17900	125.14	100400	1.00	YFFAF157	4	870
7.2	22500	202	76400	0.80	YFFA157R97	4	920	14	15600	108.49	106800	1.15	YFF157	4	830
7.5	21800	197	86800	0.80	YFFAF157R97	4	980	15	13800	96.53	106900	1.30	YFFF157	4	940
								17	12300	85.80	105400	1.45			
								19	11300	78.46	104000	1.60			
8.2	21500	178.20	88200	0.85	YFFA157	4	790	21	9790	68.28	101700	1.85			
9.0	19700	162.96	95000	0.90	YFFAF157R97	4	850	24	8640	60.25	99600	2.1			
10	17100	141.80	102800	1.05	YFF157R97	4	820	28	7490	52.24	97000	2.4			
12	15100	125.14	107900	1.20	YFFF157R97	4	920	32	6660	46.48	94800	2.7			
14	13100	108.49	112100	1.40				37	5740	40.06	91900	3.1			
15	11600	96.53	111300	1.55				45	4670	32.55	87800	3.9			
17	10300	85.80	109300	1.75											
19	9460	78.46	107600	1.90				15	14200	98.95	76400	0.85	YFFA127	4	550
21	8230	68.28	104900	2.2				17	12500	87.31	76300	0.95	YFFAF127	4	590
24	7270	60.25	102300	2.5				19	10800	75.41	75700	1.10	YFF127	4	590
28	6300	52.24	99300	2.9				21	10000	70.07	75300	1.20	YFFF127	4	630
								23	9160	63.91	74700	1.30			
13	13800	114.34	82200	0.85	YFFA127	4	540	26	7930	55.31	73500	1.50			
15	11900	98.95	81700	1.00	YFFAF127	4	570	30	7000	48.80	72300	1.70			
17	10500	87.31	80900	1.15	YFF127	4	570	35	6040	42.15	70700	2.0			
19	9090	75.41	79700	1.30	YFFF127	4	620								
21	8450	70.07	79000	1.40				25	8330	58.12	45200	0.90	YFFA107	4	410
23	7710	63.91	78100	1.55				29	7280	50.73	45300	1.05	YFFAF107	4	430
26	6670	55.31	76400	1.80				34	6170	43.03	45100	1.25	YFF107	4	425
30	5880	48.80	74900	2.0				39	5390	37.61	44800	1.40	YFFF107	4	450
								46	4560	31.80	44100	1.70			
20	8990	74.52	46200	0.85	YFFA107	4	395								
22	8150	67.62	48500	0.95	YFFAF107	4	415								
25	7010	58.12	48700	1.10	YFF107	4	410								
29	6120	50.73	48400	1.25	YFFF107	4	440								

输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhang load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhang load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg
22kW								30kW							
43	4850	33.79	44300	1.55	YFFA107	4	410	66	4310	22.11	15100	1.00	YFFA97	4	380
53	3950	27.57	43300	2.0	YFFAF107	4	430	73	3910	20.07	15500	1.10	YFFAF97	4	405
58	3610	25.14	42800	2.2	YFF107	4	425	85	3360	17.25	16000	1.30	YFF97	4	390
67	3120	21.76	41900	2.5	YFFF107	4	450	98	2930	15.06	16300	1.35	YFFF97	4	420
76	2750	19.20	41000	2.8				115	2490	12.77	16400	1.45			
								132	2180	11.16	16400	1.45			
53	3940	27.44	18700	1.10	YFFA97	4	330	162	1770	9.06	15400	1.70			
59	3570	24.92	18900	1.20	YFFAF97	4	350	179	1600	8.22	15300	1.75			
66	3170	22.11	19100	1.35	YFF97	4	335	208	1380	7.07	15100	1.85			
73	2880	20.07	19200	1.50	YFFF97	4	370	238	1200	6.17	14900	1.90			
85	2470	17.25	19100	1.75				281	1020	5.23	14600	2.1			
97	2160	15.06	19000	2.0				321	890	4.57	14300	2.3			
115	1830	12.77	18700	2.3				37kW							
131	1600	11.16	18400	2.6				17	20600	85.80	88600	0.85	YFFA157	4	910
								19	18900	78.46	88700	0.95	YFFAF157	4	970
69	3060	21.32	8990	1.00	YFFA87	4	265	22	16400	68.28	88400	1.10	YFF157	4	930
76	2770	19.31	9430	1.10	YFFAF87	4	280	24	14500	60.25	87800	1.25	YFFF157	4	1040
86	2460	17.12	9850	1.20	YFF87	4	270	28	12600	52.24	86800	1.45			
95	2220	15.48	10100	1.35	YFFF87	4	285	32	11200	46.48	85700	1.60			
112	1880	13.12	10400	1.60				37	9630	40.06	84000	1.85			
128	1640	11.46	10600	1.85				45	7820	32.55	81400	2.3			
153	1370	9.58	10600	2.1				53	6630	27.60	79100	2.7			
177	1190	8.29	10100	1.30											
199	1050	7.35	10100	1.45				27	13300	55.31	60900	0.90	YFFA127	4	660
220	950	6.65	10000	1.60				30	11700	48.80	61100	1.00	YFFAF127	4	690
260	810	5.63	9900	1.90				35	10100	42.15	61100	1.20	YFF127	4	690
298	705	4.92	9750	2.2				39	8960	37.28	60700	1.30	YFFF127	4	740
356	590	4.12	9500	2.5				47	7530	31.33	59900	1.35			
								55	6460	26.86	58900	1.45			
14	21100	108.49	89600	0.85	YFFA157	4	860	58	6080	25.30	58500	1.60			
15	18800	96.53	96900	0.95	YFFAF157	4	920	60	5910	24.57	58300	1.95			
17	16700	85.80	96400	1.10	YFF157	4	880	69	5140	21.38	57100	2.3			
19	15300	78.46	95800	1.20	YFFF157	4	990	78	4530	18.87	56000	2.4			
22	13300	68.28	94600	1.35				90	3930	16.36	54600	2.8			
24	11700	60.25	93300	1.55				101	3500	14.55	53400	3.1			
28	10200	52.24	91500	1.75				117	3010	12.54	51900	3.3			
32	9060	46.48	89900	2.0				144	2450	10.19	49600	3.9			
37	7810	40.06	87700	2.3				166	2130	8.86	47700	3.3			
								186	1890	7.88	46500	3.2			
19	14700	75.41	66600	0.80	YFFA127	4	610	53	6630	27.57	36200	1.20	YFFA107	4	500
21	13700	70.07	66800	0.90	YFFAF127	4	650	58	6040	25.14	36200	1.30	YFFAF107	4	520
23	12500	63.91	66900	0.95	YFF127	4	650	68	5230	21.76	36200	1.50	YFF107	4	520
27	10800	55.31	66700	1.10	YFFF127	4	690	77	4610	19.20	36000	1.70	YFFF107	4	550
30	9510	48.80	66300	1.25				89	3990	16.58	35600	1.95			
35	8210	42.15	65500	1.45				100	3530	14.67	35100	2.1			
39	7270	37.28	64700	1.60				119	2960	12.33	34400	2.2			
47	6110	31.33	63200	1.65				148	2390	9.96	33300	2.4			
55	5240	26.86	61800	1.80				152	2330	9.69	32400	2.4			
58	4930	25.30	61200	1.95				176	2010	8.37	31700	2.6			
60	4790	24.57	60900	2.4				199	1780	7.40	31000	2.7			
69	4170	21.38	59400	2.9				236	1500	6.22	30000	3.1			
78	3680	18.87	58000	3.0				45kW							
								22	20000	68.28	81300	0.90	YFFA157	4	940
34	8390	43.03	39200	0.90	YFFA107	4	465	24	17600	60.25	81600	1.00	YFFAF157	4	1000
39	7330	37.61	39600	1.05	YFFAF107	4	485	28	15300	52.24	81300	1.20	YFF157	4	960
46	6200	31.80	39700	1.25	YFF107	4	480	32	13600	46.48	80900	1.30	YFFF157	4	1070
53	5370	27.57	39500	1.45	YFFF107	4	510	37	11700	40.06	79900	1.55			
58	4900	25.14	39300	1.60				45	9510	32.55	78000	1.90			
68	4240	21.76	38800	1.85				53	8070	27.60	76200	2.2			
77	3740	19.20	38300	2.1											
89	3230	16.58	37600	2.4				30	14300	48.80	55200	0.85	YFFA127	4	690
100	2860	14.67	36900	2.7				35	12300	42.15	56000	0.95	YFFAF127	4	720
119	2400	12.33	35900	2.9				39	10900	37.28	56200	1.10	YFF127	4	720
148	1940	9.96	34500	3.3				47	9160	31.33	56100	1.15	YFFF127	4	770
								55	7850	26.86	55700	1.20			
								58	7400	25.30	55400	1.30			


输出转速 output speed n _a r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputsides Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputsides Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
45kW								75kW							
60	7180	24.57	55300	1.60	YFFAI27	4	690	69	10300	21.38	44800	1.15	YFFAI27	4	950
69	6250	21.38	54500	1.90	YFFAFI27	4	720	78	9130	18.87	45100	1.20	YFFAFI27	4	980
78	5520	18.87	53700	2.0	YFFI27	4	720	90	7920	16.36	45200	1.40	YFFI27	4	980
90	4780	16.36	52600	2.3	YFFFI27	4	770	102	7040	14.55	45000	1.55	YFFFI27	4	1030
101	4250	14.55	51600	2.6				118	6070	12.54	44600	1.55			
117	3670	12.54	50300	2.6				145	4930	10.19	43700	1.65			
144	2980	10.19	48400	2.7				167	4290	8.86	42200	1.65			
166	2590	8.86	46600	2.7				188	3810	7.88	41600	1.95			
186	2300	7.88	45500	3.2				218	3290	6.80	40700	2.1			
216	1990	6.80	44000	3.5				268	2670	5.52	39300	2.2			
266	1610	5.52	42000	3.7				316	2270	4.68	38100	2.7			
55kW								90kW							
53	8060	27.57	32400	0.95	YFFAI07	4	530	45	18900	32.55	59100	0.95	YFFAI57	4	1280
58	7350	25.14	32800	1.05	YFFAFI07	4	550	52	16600	28.60	60000	1.00	YFFAFI57	4	1330
68	6360	21.76	33200	1.25	YFFI07	4	550	54	16000	27.60	60200	1.10	YFFI57	4	1300
77	5610	19.20	33300	1.40	YFFFI07	4	570	58	14800	25.43	60400	1.10	YFFFI57	4	1400
89	4850	16.58	33300	1.60				67	12900	22.16	60600	1.40			
100	4290	14.67	33100	1.75				75	11500	19.77	60500	1.50			
119	3600	12.33	32700	1.75				88	9790	16.85	59900	1.85			
148	2910	9.96	31900	1.80				106	8110	13.96	58900	2.1			
152	2830	9.69	31000	1.95				124	6920	11.92	57800	2.3			
176	2450	8.37	30400	1.95				58	14700	25.30	33100	0.80	YFFAI27	4	1020
199	2160	7.40	29900	2.1				69	12400	21.38	38800	0.95	YFFAFI27	4	1060
236	1820	6.22	29100	2.5				78	11000	18.87	40900	1.00	YFFI27	4	1060
24	21500	60.25	73800	0.85	YFFAI57	4	1070	90	9500	16.36	41500	1.15	YFFFI27	4	1100
28	18600	52.24	74600	0.95	YFFAFI57	4	1130	102	8450	14.55	41700	1.30			
32	16500	46.48	74800	1.10	YFFI57	4	1090	118	7280	12.54	41800	1.30			
37	14300	40.06	74700	1.25	YFFFI57	4	1200	145	5920	10.19	41400	1.35			
45	11600	32.55	73800	1.55				167	5150	8.86	40100	1.35			
52	10200	28.60	72900	1.65				188	4580	7.88	39700	1.60			
53	9830	27.60	72600	1.65				218	3950	6.80	39000	1.75			
58	9060	25.43	71900	1.85				268	3210	5.52	37900	1.85			
67	7890	22.16	70600	2.3				316	2720	4.68	36900	2.2			
75	7040	19.77	69400	2.4				110kW							
88	6000	16.85	67600	3.0				54	19500	27.60	53100	0.90	YFFAI57	4	1460
40	13300	37.28	50600	0.90	YFFAI27	4	810	67	15700	22.16	54900	1.15	YFFAFI57	4	1520
47	11200	31.33	51400	1.10	YFFAFI27	4	850	75	14000	19.77	55400	1.20	YFFI57	4	1480
58	9010	25.30	51600	1.35	YFFI27	4	840	88	11900	16.85	55600	1.50	YFFFI57	4	1590
69	7610	21.38	51300	1.60	YFFFI27	4	890	106	9880	13.96	55300	1.70			
78	6720	18.87	50800	1.65				125	8430	11.92	54700	1.90			
90	5820	16.36	50100	1.90				132kW							
101	5180	14.55	49400	2.1				67	18800	22.16	48700	0.95	YFFAI57	4	1560
118	4470	12.54	48400	2.1				75	16800	19.77	49800	1.00	YFFAFI57	4	1620
145	3630	10.19	46800	2.2				88	14300	16.85	50900	1.25	YFFI57	4	1580
166	3160	8.86	45100	2.2				106	11900	13.96	51400	1.45	YFFFI57	4	1680
187	2810	7.88	44200	2.6				125	10100	11.92	51400	1.60			
217	2420	6.80	42900	2.9				160kW							
267	1970	5.52	41100	3.0				88	17300	16.85	44800	1.05	YFFAI57	4	1560
315	1670	4.68	39600	3.6				106	14400	13.96	46400	1.20	YFFAFI57	4	1620
75kW								125	12300	11.92	47100	1.30	YFFI57	4	1580
32	22500	46.48	62900	0.80	YFFAI57	4	1200	200kW							
37	19400	40.06	64400	0.95	YFFAFI57	4	1260	88	21700	16.85	36100	0.85	YFFAI57	4	1560
45	15800	32.55	65400	1.15	YFFI57	4	1220	106	18000	13.96	39200	0.95	YFFAFI57	4	1620
52	13800	28.60	65500	1.20	YFFFI57	4	1330	125	15300	11.92	41000	1.05	YFFI57	4	1580
54	13400	27.60	65500	1.25				YFFFI57							
58	12300	25.43	65400	1.35											
67	10700	22.16	64900	1.70											
75	9570	19.77	64300	1.80											
88	8150	16.85	63200	2.2											
106	6760	13.96	61600	2.5											
124	5770	11.92	60100	2.8											
58	12200	25.30	44000	1.00	YFFAI27	4	950								
					YFFAFI27	4	980								
					YFFI27	4	980								
					YFFFI27	4	1030								

输出转矩 output torque Ma N.m	输出转速 output speed na r/min	传动比 Ratio i	径向载荷 Permissible overhung load outputsides Fa N	机型号 Type	功 率 Power kw/4p	重 量 weight kg	输出转矩 output torque Ma N.m	输出转速 output speed na r/min	传动比 Ratio i	径向载荷 Permissible overhung load outputsides Fa N	机型号 Type	功 率 Power kw/4p	重 量 weight kg
200	0.17	8193	4290	YFFA37R17	0.12	19	400	2.1	619	5920	YFFA47R17	0.18	23
	0.20	7064	4290	YFFAF37R17	0.12	21		2.5	524		YFFAF47R17	0.18	26
	0.21	6585	4290	YFF37R17	0.12	20		2.7	489		YFF47R17	0.18	24
	0.24	5756	4290	YFFF37R17	0.12	22		3.1	427		YFFF47R17	0.18	27
	0.28	4963	4290					3.5	381				
	0.31	4434	4290				400	3.9	334	5920	YFFA47R17	0.25	24
	0.36	3875	4290					4.4	295		YFFAF47R17	0.25	26
	0.41	3392	4290					5.1	253		YFF47R17	0.25	25
	0.47	2965	4290								YFFF47R17	0.25	28
	0.53	2587	4290				400	6.4	217	5920	YFFA47R17	0.37	25
	0.60	2284	4290					7.3	190		YFFAF47R17	0.37	27
	0.69	1997	4290					7.8	178		YFF47R17	0.37	25
	0.72	1929	4290								YFFF47R17	0.37	29
	0.82	1679	4290				400	9.1	149	5920	YFFA57R17	0.55	26
	0.89	1550	4290					10	131		YFFAF57R17	0.55	29
	1.0	1356	4290								YFF57R17	0.55	27
	1.2	1180	4290								YFFF57R17	0.55	30
	1.3	1044	4290				600	0.09	14832	9200	YFFA57R17	0.12	39
	1.5	914	4290					0.10	13604		YFFAF57R17	0.12	45
	1.7	808	4290					0.11	12602		YFF57R17	0.12	39
	2.0	698	4290					0.12	11252		YFFF57R17	0.12	46
	2.2	616	4290					0.14	9986				
	2.5	544	4290					0.16	8787				
	3.0	466	4290					0.17	7908				
	3.4	411	4290					0.20	6913				
	3.8	364	4290					0.23	6030				
	4.2	326	4290	YFFA37R17	0.18	19		0.26	5289				
				YFFAF37R17	0.18	20		0.30	4654				
				YFF37R17	0.18	19		0.34	4060				
				YFFF37R17	0.18	21		0.39	3564				
	4.6	285	4290	YFFA37R17	0.25	19		0.44	3161				
	5.3	250	4290	YFFAF37R17	0.25	20		0.48	2854				
	6.0	219	4290	YFF37R17	0.25	19		0.54	2576				
	7.1	186	4290	YFFF37R17	0.25	21		0.61	2266				
	7.8	167	4290					0.69	2012				
	8.9	145	4290					0.77	1791				
	10	129	4290					0.85	1617				
400	0.11	12251	5920	YFFA47R17	0.12	24		0.97	1422				
	0.13	10619	5920	YFFAF47R17	0.12	27		1.1	1243				
	0.14	9846	5920	YFF47R17	0.12	25		1.3	1066				
	0.16	8534	5920	YFFF47R17	0.12	28		1.5	949				
	0.19	7460	5920				600	1.5	856	9200	YFFA57R17	0.18	39
	0.21	6536	5920					1.8	749		YFFAF57R17	0.18	44
	0.24	5746	5920					2.0	658		YFF57R17	0.18	39
	0.27	5022	5920								YFFF57R17	0.18	45
	0.31	4401	5920				600	2.4	549	9200	YFFA57R37	0.25	39
	0.36	3883	5920					2.7	483		YFFAF57R37	0.25	45
	0.40	3443	5920					3.0	426		YFF57R37	0.25	40
	0.46	2976	5920					3.4	382		YFFF57R37	0.25	46
	0.52	2629	5920				600	4.2	330	9200	YFFA57R37	0.37	40
	0.55	2519	5920					4.6	298		YFFAF57R37	0.37	46
	0.58	2394	5920					5.3	262		YFF57R37	0.37	40
	0.64	2172	5920								YFFF57R37	0.37	47
	0.68	2025	5920				600	6.0	226	9200	YFFA57R37	0.55	42
	0.78	1770	5920					6.8	200		YFFAF57R37	0.55	48
	0.88	1576	5920								YFF57R37	0.55	42
	1.0	1363	5920								YFFF57R37	0.55	49
	1.2	1192	5920				600	8.1	170	9200	YFFA57R37	0.75	43
	1.3	1061	5920					9.1	152		YFFAF57R37	0.75	49
	1.5	931	5920					10	134		YFF57R37	0.75	43
	1.7	822	5920								YFFF57R37	0.75	50
	2.0	706	5920										

输出转矩 output torque Ma N.m	输出转速 output speed na r/min	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	机型号 Type	功 率 Power kw/lp	重量 weight kg	输出转矩 output torque Ma N.m	输出转速 output speed na r/min	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	机型号 Type	功 率 Power kw/lp	重量 weight kg
820	0.07	19199	10300	YFFA67R37	0.12	43	1500	0.27	5026	15700	YFFA77R37	0.12	65
	0.08	17610		YFFAF67R37	0.12	49		0.31	4435		YFFAF77R37	0.12	72
	0.09	14992		YFF67R37	0.12	46		0.36	3832		YFF77R37	0.12	69
	0.11	12926		YFFF67R37	0.12	52		0.46	2978		YFFF77R37	0.12	80
	0.12	11480						0.53	2613				
	0.14	10220						0.60	2284				
	0.15	8933											
	0.17	7940						0.65	2029	15700	YFFA77R37	0.18	65
	0.19	7096						0.76	1728		YFFAF77R37	0.18	72
	0.23	6080						0.86	1544		YFF77R37	0.18	69
	0.26	5341						0.98	1354		YFFF77R37	0.18	80
	0.29	4690											
	0.34	4091						1.1	1200	15700	YFFA77R37	0.25	66
	0.39	3574						1.2	1053		YFFAF77R37	0.25	72
	0.41	3377									YFF77R37	0.25	70
	0.44	3133									YFFF77R37	0.25	80
	0.47	2912						1.5	910	15700	YFFA77R37	0.37	67
	0.50	2756						1.7	810		YFFAF77R37	0.37	73
	0.51	2714						1.9	710		YFF77R37	0.37	71
	0.57	2439									YFFF77R37	0.37	81
	0.58	2372											
	0.65	2126						2.2	615	15700	YFFA77R37	0.55	69
	0.73	1884						2.5	538		YFFAF77R37	0.55	75
	0.85	1631						2.8	480		YFF77R37	0.55	73
	0.96	1437									YFFF77R37	0.55	83
	1.1	1256											
820	1.2	1126	10300	YFFA67R37	0.18	42	1500	3.3	413	15700	YFFA77R37	0.75	70
	1.3	984		YFFAF67R37	0.18	48		3.8	367		YFFAF77R37	0.75	76
	1.5	864		YFF67R37	0.18	45		4.3	323		YFF77R37	0.75	74
				YFFF67R37	0.18	51					YFFF77R37	0.75	84
820	1.8	722	10300	YFFA67R37	0.25	43	3000	0.06	23042	19800	YFFA87R57	0.12	120
	2.0	634		YFFAF67R37	0.25	49		0.07	20462		YFFAF87R57	0.12	130
	2.4	539		YFF67R37	0.25	46		0.08	18238		YFF87R57	0.12	125
				YFFF67R37	0.25	52		0.09	15877		YFFF87R57	0.12	140
820	2.8	500	10300	YFFA67R37	0.37	43		0.10	14099				
	3.0	454		YFFAF67R37	0.37	50		0.11	12205				
	3.5	392		YFF67R37	0.37	46		0.13	10433				
				YFFF67R37	0.37	52		0.15	9381				
820	4.1	333	10300	YFFA67R37	0.55	45		0.17	8142				
	4.6	297		YFFAF67R37	0.55	52		0.19	7100				
	5.2	261		YFF67R37	0.55	48		0.22	6273				
	5.7	238		YFFF67R37	0.55	54		0.25	5510				
820	6.9	200	10300	YFFA67R37	0.75	46		0.28	4954				
				YFFAF67R37	0.75	53	3000	0.31	4245	19800	YFFA87R57	0.18	120
				YFF67R37	0.75	49		0.35	3721		YFFAF87R57	0.18	130
				YFFF67R37	0.75	55		0.41	3244		YFF87R57	0.18	125
1500	0.07	19180	15700	YFFA77R37	0.12	65		0.46	2881		YFFF87R57	0.18	140
	0.08	17593		YFFAF77R37	0.12	72	3000	0.50	2576	19800	YFFA87R57	0.25	120
	0.09	16128		YFF77R37	0.12	69		0.59	2199		YFFAF87R57	0.25	130
	0.10	13731		YFFF77R37	0.12	80		0.67	1930		YFF87R57	0.25	125
	0.11	12049									YFFF87R57	0.25	140
	0.13	11035					3000	0.81	1709	19800	YFFA87R57	0.37	120
	0.14	9683						0.92	1493		YFFAF87R57	0.37	130
	0.16	8464									YFF87R57	0.37	125
	0.18	7520									YFFF87R57	0.37	140
	0.21	6580					3000	1.0	1300	19800	YFFA87R57	0.55	120
	0.24	5808						1.2	1148		YFFAF87R57	0.55	135
								1.4	1010		YFF87R57	0.55	125
								1.5	887		YFFF87R57	0.55	145

输出转矩 output torque Ma N.m	输出转速 output speed na r/min	传动比 Ratio i	径向载荷 Permissible overhung load outputsides Fa N	机型号 Type	功率 Power kw/4p	重量 weight kg	输出转矩 output torque Ma N.m	输出转速 output speed na r/min	传动比 Ratio i	径向载荷 Permissible overhung load outputsides Fa N	机型号 Type	功率 Power kw/4p	重量 weight kg
3000	1.8	780	19800	YFFA87R57	0.75	120	4300	4.9	285	29900	YFFA97R57	3	205
	2.0	674		YFFAF87R57	0.75	135		5.7	245		YFFAF97R57	3	225
				YFF87R57	0.75	130					YFF97R57	3	215
				YFFF87R57	0.75	145					YFFF97R57	3	245
3000	2.3	609	19800	YFFA87R57	1.1	125	7680	0.05	25375	49800	YFFA107R77	0.12	275
	2.7	515		YFFAF87R57	1.1	140		0.06	21652		YFFAF107R77	0.12	295
	3.1	452		YFF87R57	1.1	135		0.07	18933		YFF107R77	0.12	290
				YFFF87R57	1.1	150		0.08	16888		YFFF107R77	0.12	320
3000	4.1	345	19800	YFFA87R57	1.5	130	7680	0.09	14767				
				YFFAF87R57	1.5	140		0.12	11348	49800	YFFA107R77	0.18	275
				YFF87R57	1.5	135		0.13	10039		YFFAF107R77	0.18	295
				YFFF87R57	1.5	150		0.15	8548		YFF107R77	0.18	290
4300	0.07	20813	29900	YFFA97R57	0.12	185	7680	0.17	7674		YFFF107R77	0.18	320
	0.08	18119		YFFAF97R57	0.12	205		0.19	6767	49800	YFFA107R77	0.25	275
	0.09	15472		YFF97R57	0.12	190		0.22	5954		YFFAF107R77	0.25	295
	0.10	14022		YFFF97R57	0.12	225		0.25	5223		YFF107R77	0.25	290
	0.11	12324									YFFF107R77	0.25	320
	0.13	10838											
	0.14	9576						0.30	4567	49800	YFFA107R77	0.37	275
	0.17	8318						0.39	3521		YFFAF107R77	0.37	295
	0.19	7328									YFF107R77	0.37	290
											YFFF107R77	0.37	320
4300	0.20	6469	29900	YFFA97R57	0.18	185	7680	0.45	3037	49800	YFFA107R77	0.55	275
	0.24	5615		YFFAF97R57	0.18	205		0.49	2756		YFFAF107R77	0.55	300
	0.27	4961		YFF97R57	0.18	190		0.57	2369		YFF107R77	0.55	295
	0.30	4333		YFFF97R57	0.18	225					YFFF107R77	0.55	320
4300	0.33	3906	29900	YFFA97R57	0.25	185	7680	0.67	2068	49800	YFFA107R77	0.75	280
	0.39	3352		YFFAF97R57	0.25	205		0.76	1826		YFFAF107R77	0.75	300
	0.45	2907		YFF97R57	0.25	190					YFF107R77	0.75	295
				YFFF97R57	0.25	225					YFFF107R77	0.75	325
4300	0.54	2553	29900	YFFA97R57	0.37	185	7680	0.88	1597	49800	YFFA107R77	1.1	285
	0.61	2245		YFFAF97R57	0.37	205		1.0	1401		YFFAF107R77	1.1	305
	0.70	1970		YFF97R57	0.37	190		1.1	1243		YFF107R77	1.1	300
				YFFF97R57	0.37	225					YFFF107R77	1.1	330
4300	0.79	1722	29900	YFFA97R57	0.55	185	7680	1.3	1087	49800	YFFA107R77	1.5	285
	0.89	1527		YFFAF97R57	0.55	210		1.5	950		YFFAF107R77	1.5	305
	1.0	1327		YFF97R57	0.55	195					YFF107R77	1.5	300
				YFFF97R57	0.55	225					YFFF107R77	1.5	330
4300	1.2	1171	29900	YFFA97R57	0.75	190	7680	1.7	834	49800	YFFA107R77	2.2	290
	1.4	1022		YFFAF97R57	0.75	210		1.9	736		YFFAF107R77	2.2	315
				YFF97R57	0.75	195		2.2	640		YFF107R77	2.2	310
				YFFF97R57	0.75	230					YFFF107R77	2.2	335
4300	1.6	898	29900	YFFA97R57	1.1	195	7680	2.5	560	49800	YFFA107R77	3	295
	1.8	784		YFFAF97R57	1.1	215		2.9	489		YFFAF107R77	3	315
	2.0	690		YFF97R57	1.1	200		3.2	436		YFF107R77	3	310
				YFFF97R57	1.1	235					YFFF107R77	3	340
4300	2.3	605	29900	YFFA97R57	1.5	195	7680	3.8	370	49800	YFFA107R77	4	300
	2.7	529		YFFAF97R57	1.5	215		4.3	333		YFFAF107R77	4	325
	3.0	467		YFF97R57	1.5	200					YFF107R77	4	320
				YFFF97R57	1.5	235					YFFF107R77	4	345
4300	3.5	406	29900	YFFA97R57	2.2	200	12000	0.06	24478	90000	YFFA127R77	0.12	425
	3.9	363		YFFAF97R57	2.2	225		0.07	19048		YFFAF127R77	0.12	465
				YFF97R57	2.2	210					YFF127R77	0.12	460
				YFFF97R57	2.2	240					YFFF127R77	0.12	510

输出转矩 output torque Ma N.m	输出转速 output speed na r/min	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	机型号 Type	功 率 Power kw/4p	重量 weight kg	输出转矩 output torque Ma N.m	输出转速 output speed na r/min	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	机型号 Type	功 率 Power kw/4p	重量 weight kg
12000	0.08	16656	90000	YFFAI27R77	0.18	425	12000	7.3	198	90000	YFFAI27R77	11	510
	0.09	14722		YFFAFI27R77	0.18	465					YFFAFI27R77	11	550
	0.10	12912		YFFI27R77	0.18	460					YFFI27R77	11	550
	0.11	11656		YFFFI27R77	0.18	510					YFFFI27R77	11	600
12000	0.13	10191	90000	YFFAI27R77	0.25	425	18000	0.04	31434	100300	YFFAI57R97	0.55	770
	0.15	8831		YFFAFI27R77	0.25	465		0.05	26173		YFFAFI57R97	0.55	820
				YFFI27R77	0.25	465		0.06	23464		YFFI57R97	0.55	790
				YFFFI27R77	0.25	510		0.07	20212		YFFFI57R97	0.55	890
12000	0.18	7643	90000	YFFAI27R77	0.37	425		0.08	17984				
	0.21	6715		YFFAFI27R77	0.37	465		0.10	13751				
	0.23	5925		YFFI27R77	0.37	465		0.11	12235				
				YFFFI27R77	0.37	510		0.19	7075				
								0.22	6295				
12000	0.26	5153	90000	YFFAI27R77	0.55	430	18000	0.26	5404	100300	YFFAI57R97	0.75	770
	0.30	4533		YFFAFI27R77	0.55	465					YFFAFI57R97	0.75	830
	0.35	3926		YFFI27R77	0.55	465					YFFI57R97	0.75	790
				YFFFI27R77	0.55	510					YFFFI57R97	0.75	890
12000	0.40	3454	90000	YFFAI27R77	0.75	430	18000	0.14	10033	100300	YFFAI57R97	1.1	770
	0.46	3031		YFFAFI27R77	0.75	470		0.16	9021		YFFAFI57R97	1.1	830
	0.52	2672		YFFI27R77	0.75	465		0.17	8026		YFFI57R97	1.1	790
				YFFFI27R77	0.75	510		0.29	4831		YFFFI57R97	1.1	900
								0.34	4130				
								0.5	2780				
12000	0.59	2357	90000	YFFAI27R77	1.1	435	18000	0.58	2427	100300	YFFAI57R97	1.5	770
	0.69	2038		YFFAFI27R77	1.1	470		0.65	2185		YFFAFI57R97	1.5	830
	0.79	1784		YFFI27R77	1.1	470					YFFI57R97	1.5	790
				YFFFI27R77	1.1	520					YFFFI57R97	1.5	900
12000	0.88	1606	90000	YFFAI27R77	1.5	435	18000	0.39	3607	100300	YFFAI57R97	2.2	780
	1.0	1390		YFFAFI27R77	1.5	475		0.44	3210		YFFAFI57R97	2.2	840
				YFFI27R77	1.5	470		0.73	1944		YFFI57R97	2.2	800
				YFFFI27R77	1.5	520		0.84	1674		YFFFI57R97	2.2	910
								0.98	1441				
12000	1.2	1220	90000	YFFAI27R77	2.2	445	18000	1.1	1308	100300	YFFAI57R97	3	780
	1.3	1077		YFFAFI27R77	2.2	480		1.2	1169		YFFAFI57R97	3	840
	1.5	930		YFFI27R77	2.2	480					YFFI57R97	3	800
				YFFFI27R77	2.2	520					YFFFI57R97	3	910
12000	1.7	820	90000	YFFAI27R77	3	445	18000	1.5	953	100300	YFFAI57R97	4	790
	1.9	727		YFFAFI27R77	3	485		1.7	845		YFFAFI57R97	4	850
	2.2	648		YFFI27R77	3	485		1.9	764		YFFI57R97	4	810
				YFFFI27R77	3	530					YFFFI57R97	4	920
12000	2.6	549	90000	YFFAI27R77	4	455	18000	2.1	680	100300	YFFAI57R97	5.5	800
	2.9	495		YFFAFI27R77	4	490		2.5	576		YFFAFI57R97	5.5	850
				YFFI27R77	4	490					YFFI57R97	5.5	820
				YFFFI27R77	4	530					YFFFI57R97	5.5	920
12000	3.3	428	90000	YFFAI27R77	5.5	460	18000	2.8	503	100300	YFFAI57R97	7.5	820
	3.8	376		YFFAFI27R77	5.5	495		3.2	446		YFFAFI57R97	7.5	870
				YFFI27R77	5.5	495					YFFI57R97	7.5	840
				YFFFI27R77	5.5	540					YFFFI57R97	7.5	940
12000	3.0	483	90000	YFFAI27R77	5.5	480	18000	4.8	302	100300	YFFAI57R97	11	830
	3.4	418		YFFAFI27R77	5.5	520		5.3	273		YFFAFI57R97	11	890
	3.8	374		YFFI27R77	5.5	520					YFFI57R97	11	850
				YFFFI27R77	5.5	560					YFFFI57R97	11	960
12000	4.6	312	90000	YFFAI27R77	7.5	500	18000	6.3	232	100300	YFFAI57R97	15	870
	4.9	293		YFFAFI27R77	7.5	540		7.2	202		YFFAFI57R97		930
				YFFI27R77	7.5	540					YFFI57R97		890
				YFFFI27R77	7.5	580					YFFFI57R97		1000
							18000	7.5	197	100300	YFFAI57R97	18.5	920
											YFFAFI57R97		980
											YFFI57R97		940
											YFFFI57R97		1050

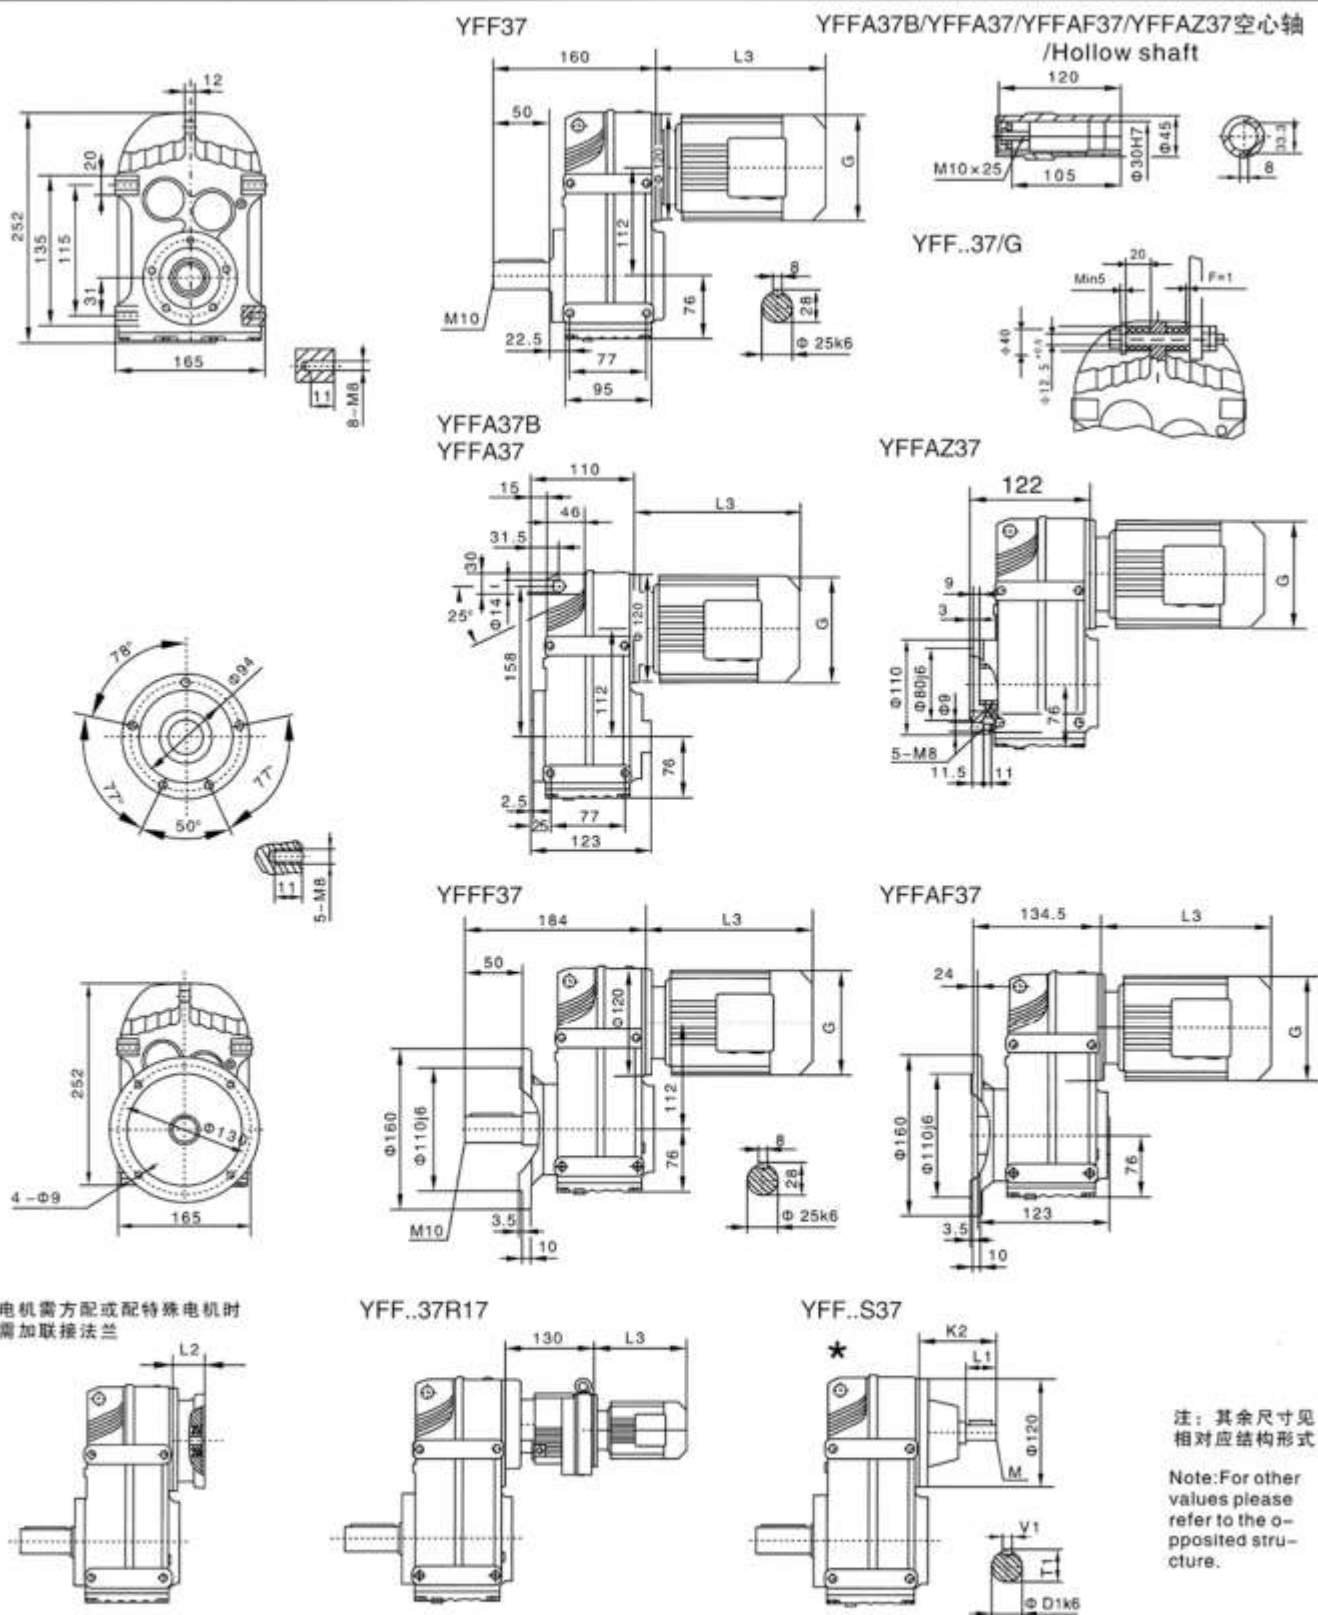


When equipping the user's motor or the special one, the flange is required to be connected.

Y2电机型号 Motor size	63	71	80	90S	90L	100	查表15 See table 15
功率(kW) Power(kW)	0.12	0.18	0.25	0.37	0.55	0.75	1.1
L3	235	250	293	308	333	347	i=50-129查AD ₁
G	130	145	175	195	195	215	i=3.7-50查AD ₂
L2	70	68	78.5	78.5	78.5	90	

注1: 以上壳体为通用件, 安装尺寸均可相互参照 2. YFF..*表示YFFA, YFFF, YFFAF, YFFAZ

Note: 1. The above housings are common parts. The mounting dimensions may consult each other. 2. YFF..*mean YFF, YFFA, YFFF, YFFAF, YFFAZ

★查表: 15 See table: 15

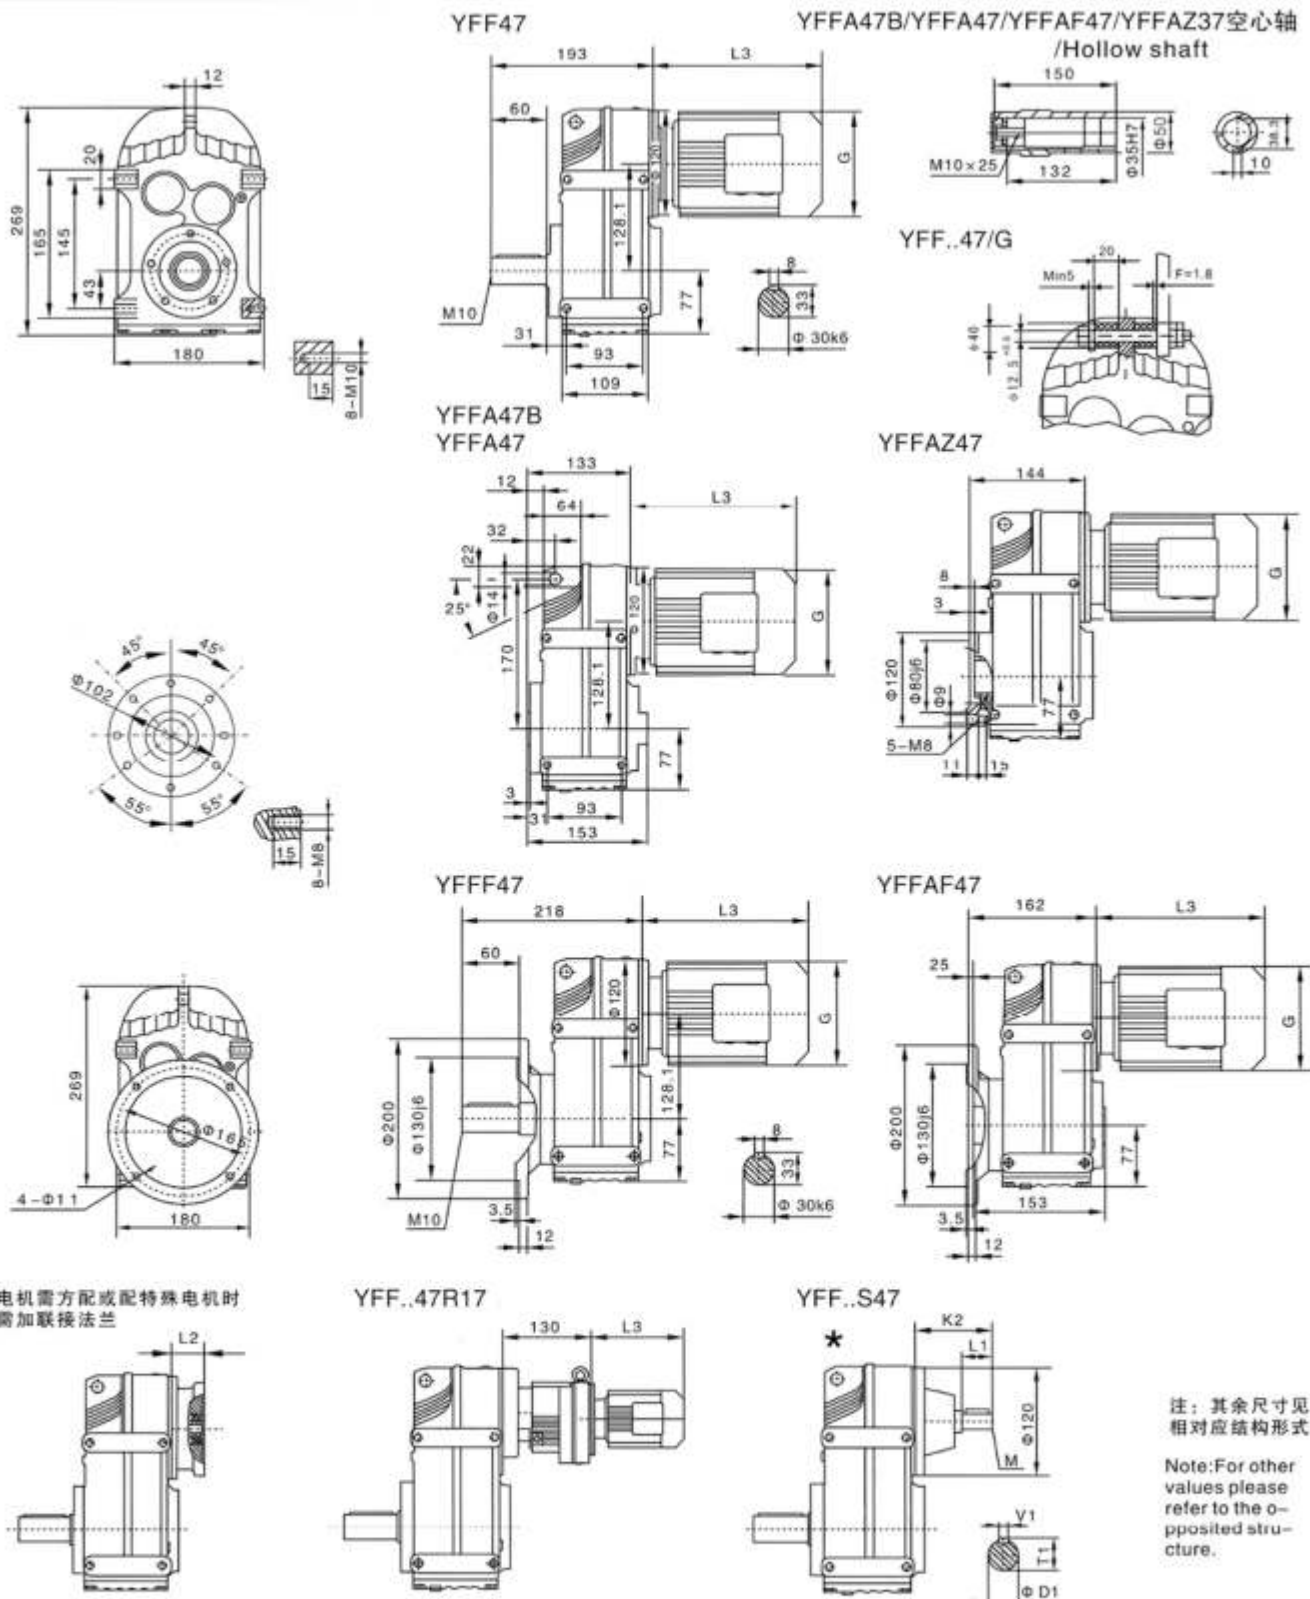

电机需方配或配特殊电机时
需加联接法兰


When equipping the user's motor or the special one, the flange is required to be connected.

Y2电机座号 Motor size	63	71	80	90S	90L	100	查表15 See table15
功率(kW) Power(kW)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3	i=68-190.76查AD ₁
L3	235	250	293	308	333	347	i=4-68查AD ₂
G	130	145	175	195	195	215	
L2	70	68	78.5	78.5	78.5	90	

注: 1. 以上壳体为通用件, 安装尺寸均可相互参照 2. YFF..* 表示YFFA, YFFF, YFFAF, YFFAZ

Note: 1. The above housings are common parts. The mounting dimensions may consult each other. 2. YFF..* mean YFF, YFFA, YFFF, YFFAF, YFFAZ

★查表: 15 See table: 15

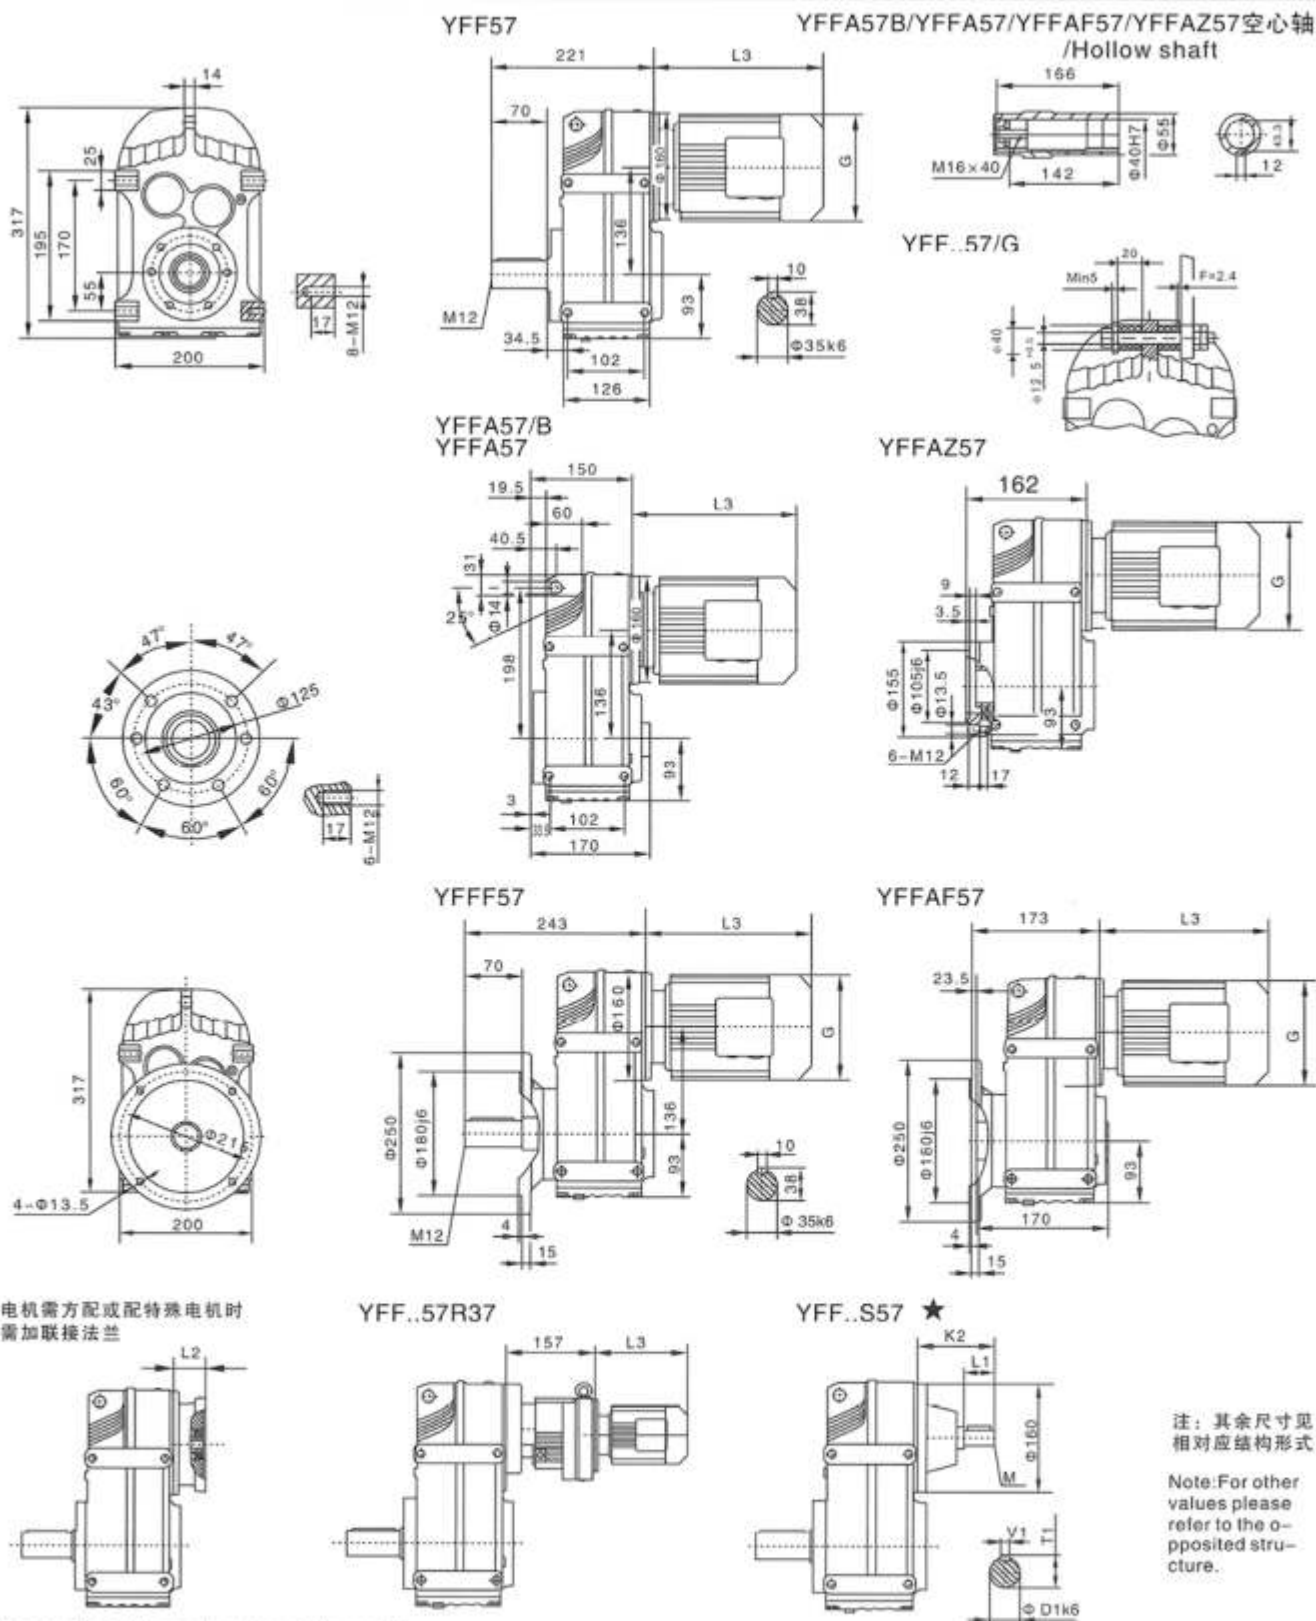




When equipping the user's motor or the special one, the flange is required to be connected.

Y2电机机座号 Motor size	63		71		80		90S	90L	100		112M	132S
功率(kW) Power(kW)	0.12	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3	4	5.5
L3	223		244		293		304	329	357		383	428
G	130		145		175		195	195	215		240	275
L2	56		57		72		72	72	74		74	82


注: 1. 以上壳体为通用件, 安装尺寸均可相互参照。 2. YFF.. * 表示 YFFA, YFFF, YFFAF, YFFAZ

Note: 1. The above housings are common parts. The mounting dimensions may consult each other. 2. YFF.. * mean YFFA, YFFA, YFFF, YFFAF, YFFAZ










★ 查表: 15 Seetable: 15 查表: 15: i=25-200 查 AD2 i=5.18-25 查 AD3

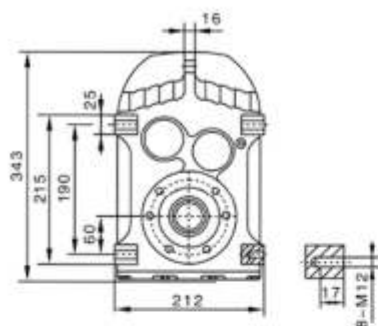

电机需方配或配特殊电机时
需加联接法兰



When equipping the user's motor or the special one, the flange is required to be connected.

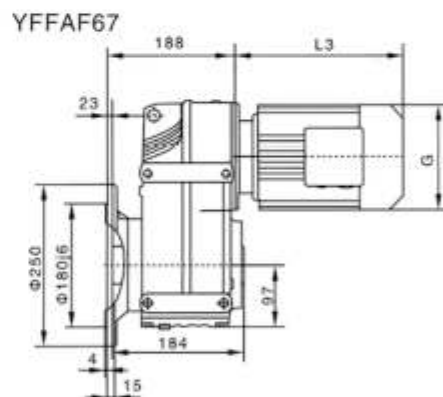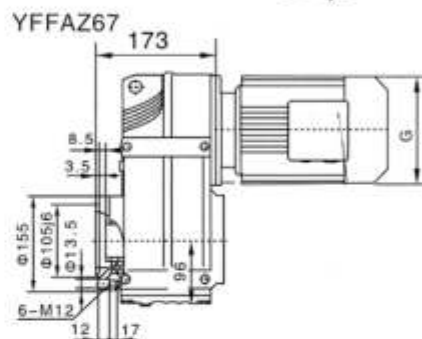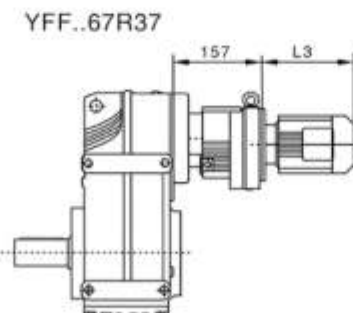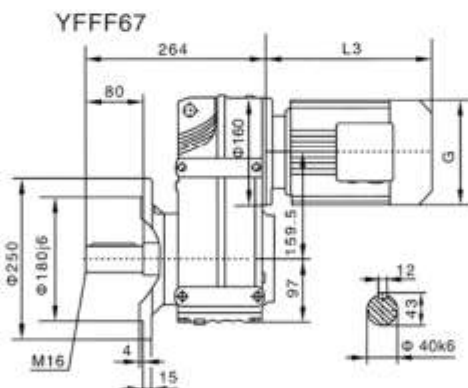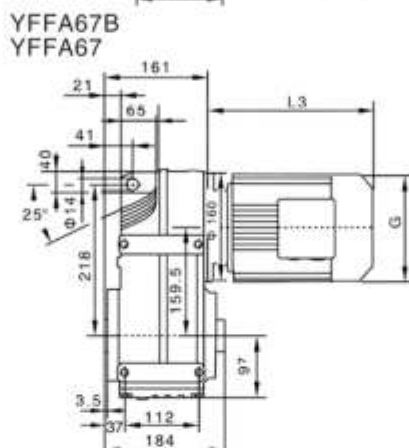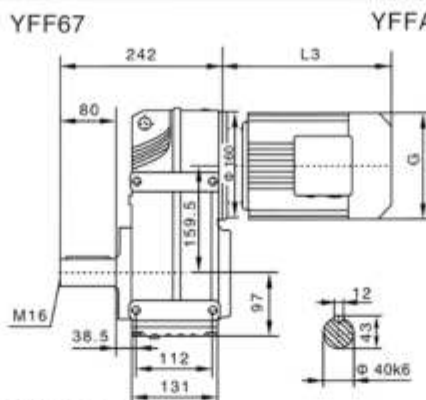

注：其余尺寸见
相对应结构形式


Note: For other values please refer to the opposed structure.

Y2电机座号 Motor size	63		71		80		90S	90L	100		112M	132S
功率(4P) Power(kW)	0.12	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3	4	5.5
L3	223		244		293		304	329	357		383	428
G	130		145		175		195	195	215		240	275
L2	70		84		85		85	85	91		91	112


注:1.以上壳体为通用件,安装尺寸均可相互参照 2.YFF...*表示YFFA、YFFF、YFFAF、YFFAZ

Note: 1. The above housings are common parts. The mounting dimensions may consult each other. 2. YFF.. * mean YFF, YFFA, YFFF, YFFAF, YFFAZ


★查表: 15 Seetable:15查表15: i=36-229查AD2 i=3.9-36查AD3

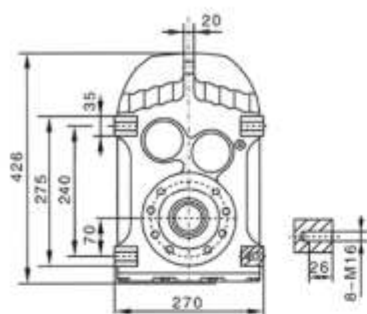



YFF77

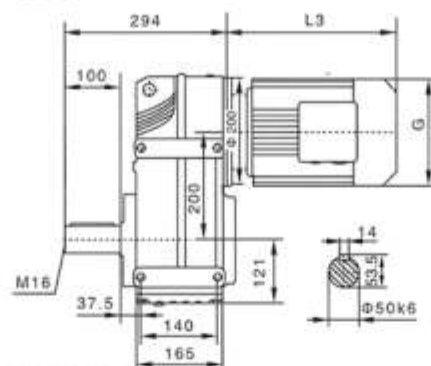



YFFA77B/YFFA77/YFFAF77/YFFAZ77空心轴/Hollow shaft




YFF..77/G

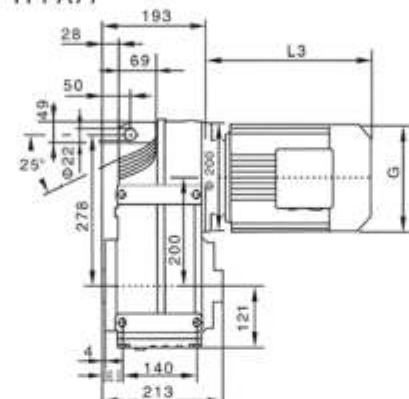YFFA77B
YFFA77



YFFAZ77

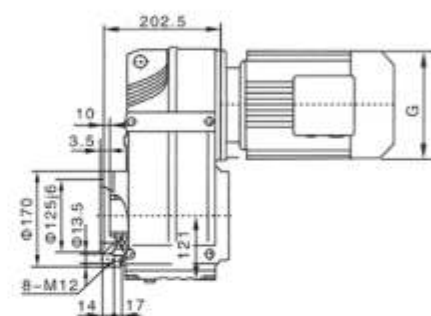


YFFF77

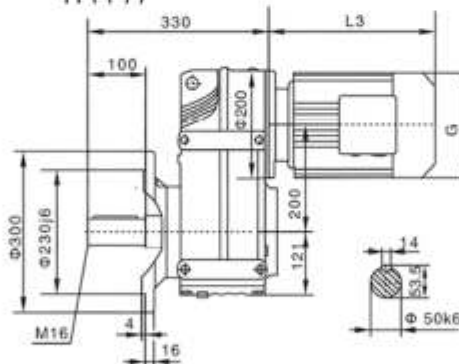


YFFAF77

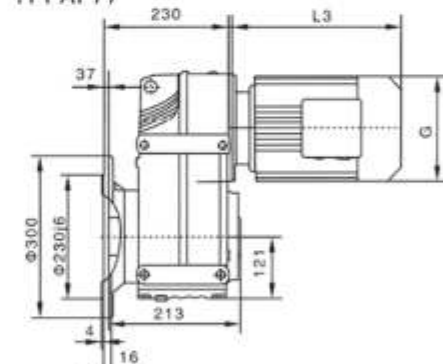


电机需方配或配特殊电机时
需加联接法兰



YFF..77R37

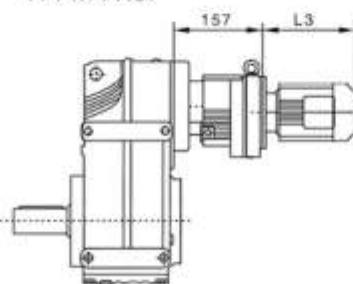

YFF..S77 ★



注: 其余尺寸见
相对应结构形式

Note: For other
values please
refer to the o-
pposited stru-
cture.


When equipping the user's motor or the special
one, the flange is required to be connected.

Y2电机机座号 Motor size	71	80	90S	90L	100	112M	132S	132M	160M
功率/kW Power(kW)	0.37	0.55 0.75	1.1	1.5	2.2 3	4	5.5	7.5	11
L3	237	292	297	322	354	391	430	463	555
G	145	175	195	195	215	240	275	275	330
L2	84	95	95	95	95	95	117	117	155

注: 1. 以上壳体为通用体安装尺寸均可相互参照 2. YFF..* 表示 YFFA、YFFF、YFFAF、YFFAZ

Note: 1. The above housings are common parts. The mounting dimensions may consult each other. 2. YFF..* mean YFF, YFFA, YFFF, YFFAF, YFFAZ

★ 查表: 15 Seetable: 15 查表: 15: i=48~282 查 AD2 i=28~48 查 AD3 i=4~28 查 AD4

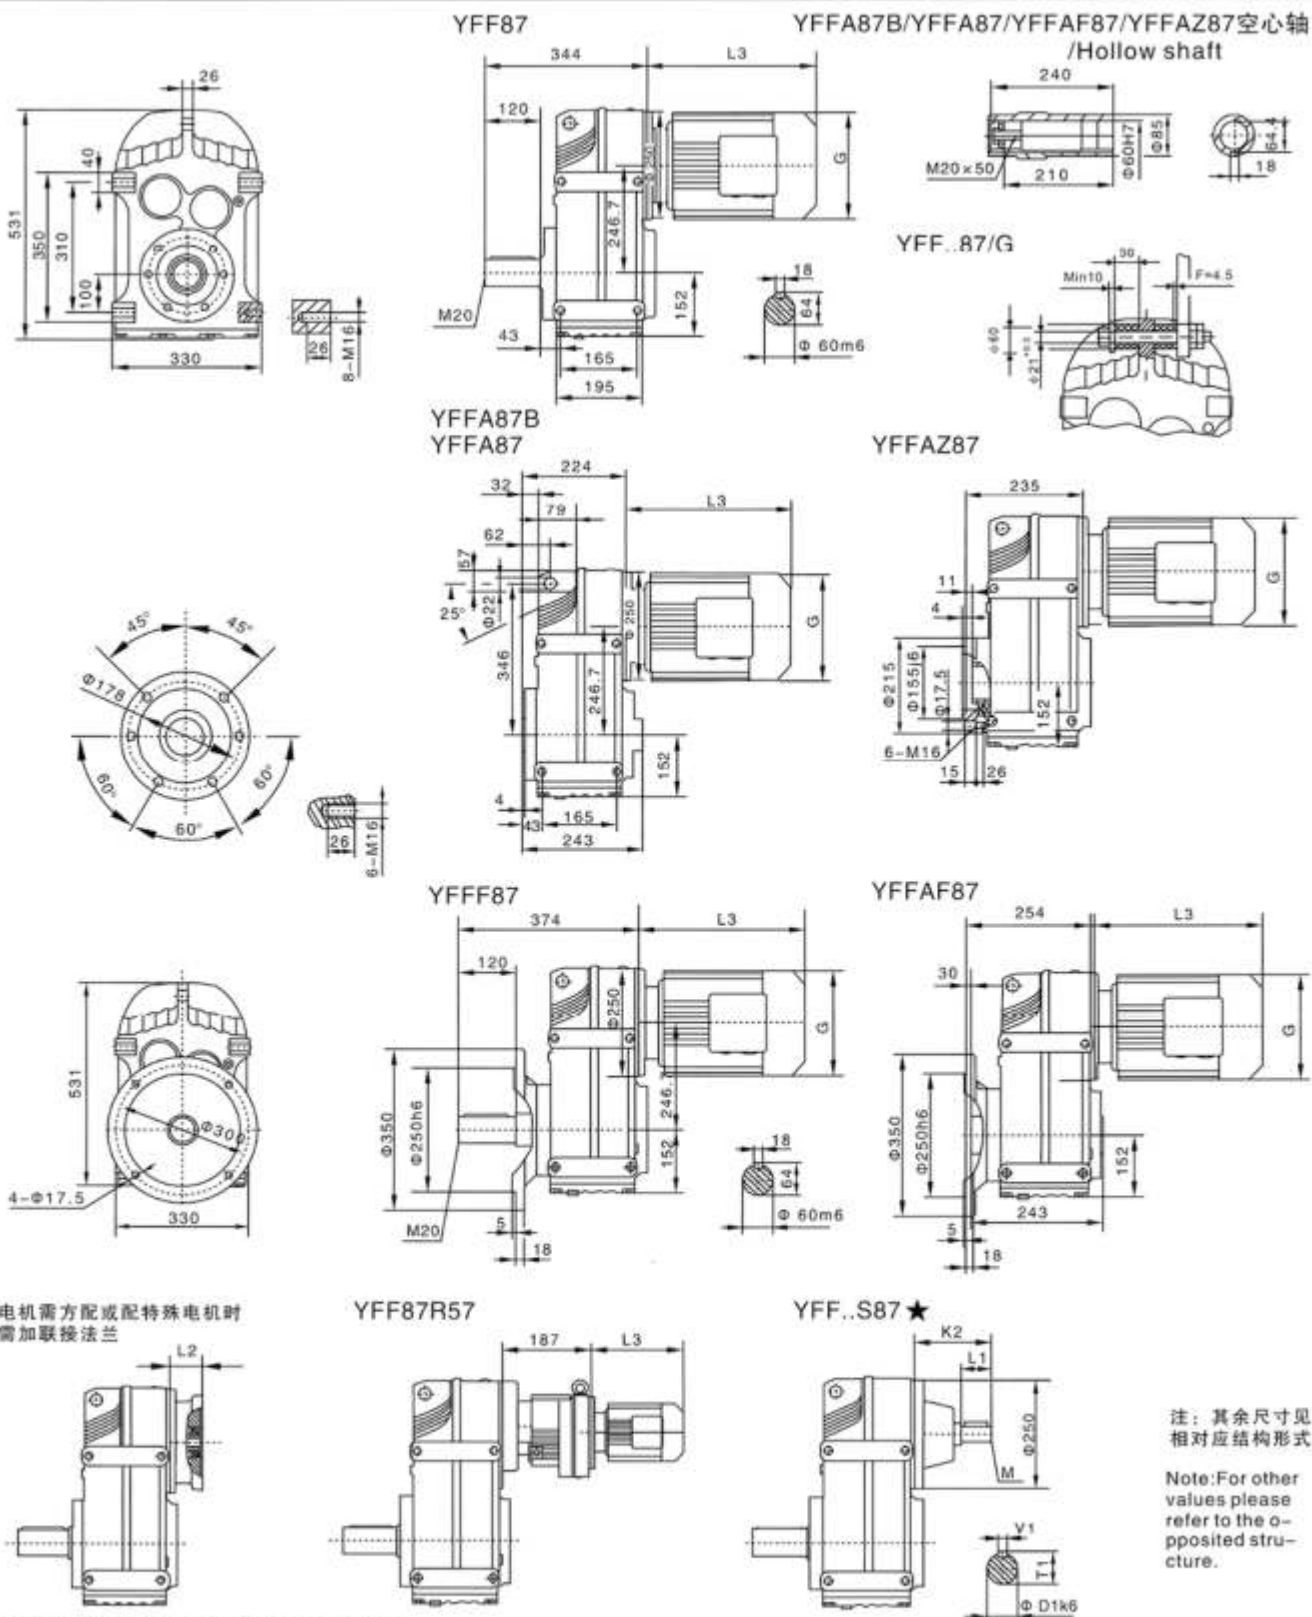



When equipping the user's motor or the special one, the flange is required to be connected.

Y2电机机座号 Motor size	80	90S	90L	100	112M	132S	132M	160M	160L	180M	180L
功率/4P Power/(kW)	0.75	1.1	1.5	2.2	3	4	5.5	7.5	11	15	22
L3	261	284	309	351	371	417	450	538	583	612	652
G	175	195	195	215	240	275	275	330	330	380	380
L2	95	95	95	95	95	117	117	155	155	155	155


注：1. 以上壳体为通用件，安装尺寸均可相互参照。 2. YFF..* 表示YFFA、YFFF、YFFAF、YFFAZ

Note: 1. The above housings are common parts. The mounting dimensions may consult each other. 2. YFF..* mean YFF, YFFA, YFFF, YFFAF, YFFAZ










★查表：15 Seetable: 15 查表15: i=76-271查AD2 i=38-76查AD3 i=28-38查AD4 i=4-28查AD5

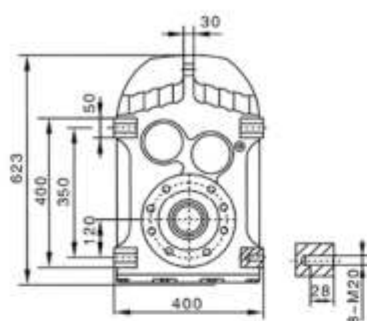

电机需方配或配特殊电机时
需加联接法兰



When equipping the user's motor or the special one, the flange is required to be connected.

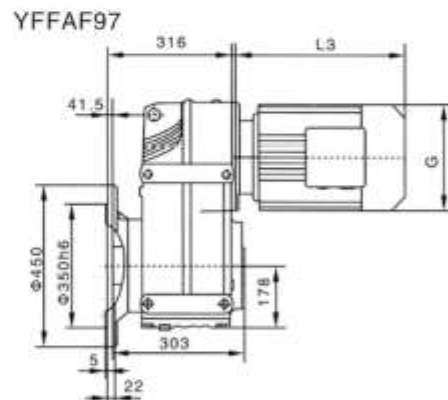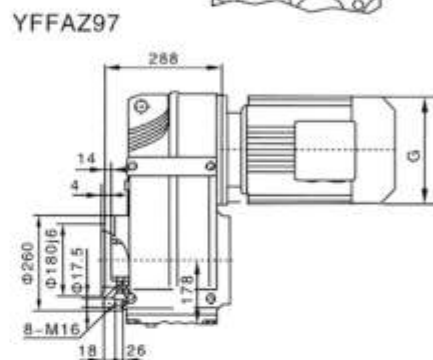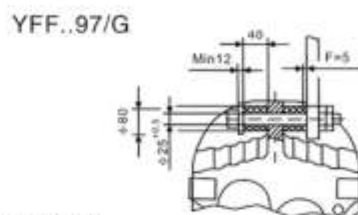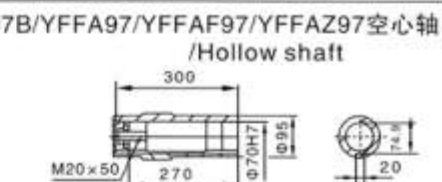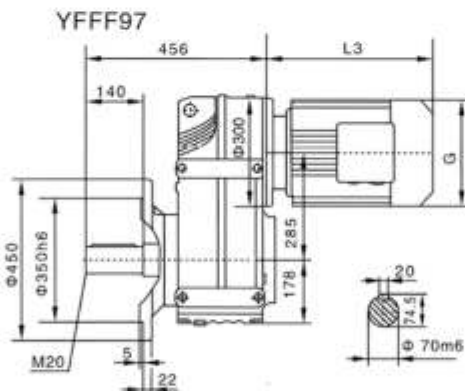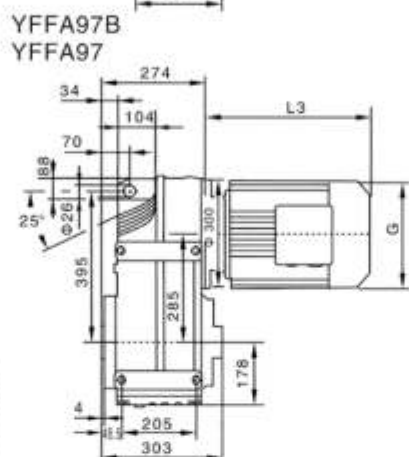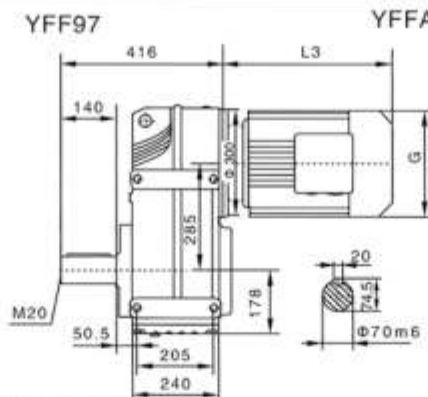

注：其余尺寸见
相对应结构形式



Note: For other values please refer to the opposite structure.

Y2电机机座号 Motor size	90S	90L	100		112N	132S	132M	160M	160L	180M	180L	200
功率/kW Power(kW)	1.1	1.5	2.2	3	4	5.5	7.5	11	15	18.5	22	30
L3	276	301	322		342	411	444	529	574	593	633	670
G	195	195	215		240	275	275	330	330	380	380	420
L2	95	95	95		95	117	117	155	155	155	155	160


注1.以上壳体为通用件,安装尺寸均可相互参照 2.YFF..*表示YFFA、YFFF、YFFAF、YFFAZ

Note: 1. The above housings are common parts. The mounting dimensions may consult each other. 2. YFF.. * mean YFF, YFFA, YFFF, YFFAF, YFFAZ








★查表: 15 Seetable: 15查表15: i=70~277查AD3 i=36~70查AD4 i=15~36查AD5 i=4.5~15查AD6

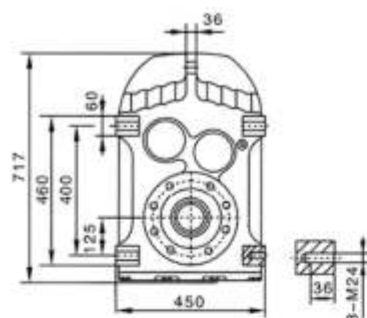

电机需方配或配特殊电机时
需加联接法兰



When equipping the user's motor or the special one, the flange is required to be connected.

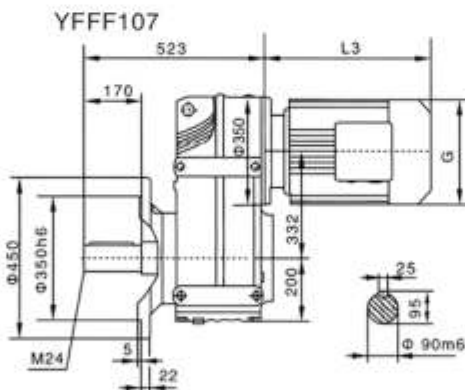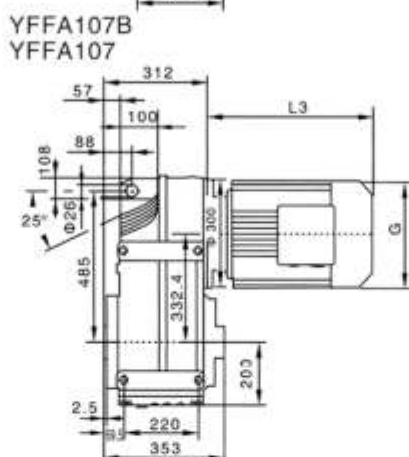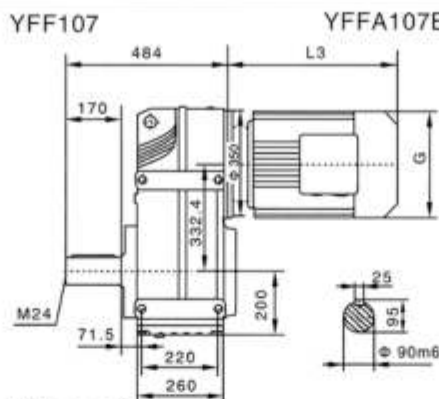

注：其余尺寸见
相对应结构形式


Note: For other values please refer to the opposited structure.

Y2电机座号 Motor size	100		112M	132S	132M	160M	160L	180M	180L	200	225S	225M
功率/kW Power(kW)	2.2	3	4	5.5	7.5	11	15	18.5	22	30	37	45
L3	325		342	397	430	518	563	593	633	670	684	709
G	215		240	275	275	330	330	380	380	420	470	470
L2	95		95	117	117	155	155	155	155	160	190	190

注:1.以上壳体为通用件,安装尺寸均可相互参照 2.YFF..*表示YFFA、YFFF、YFFAF、YFFAZ

Note: 1. The above housings are common parts. The mounting dimensions may consult each other. 2. YFF, * mean YFF, YFFA, YFFF, YFFAF, YFFAZ

★查表: 15 Seetable:15 查表15: i=115~255查AD3 i=50~115查AD4 i=32~50查AD5 i=6~32查AD6

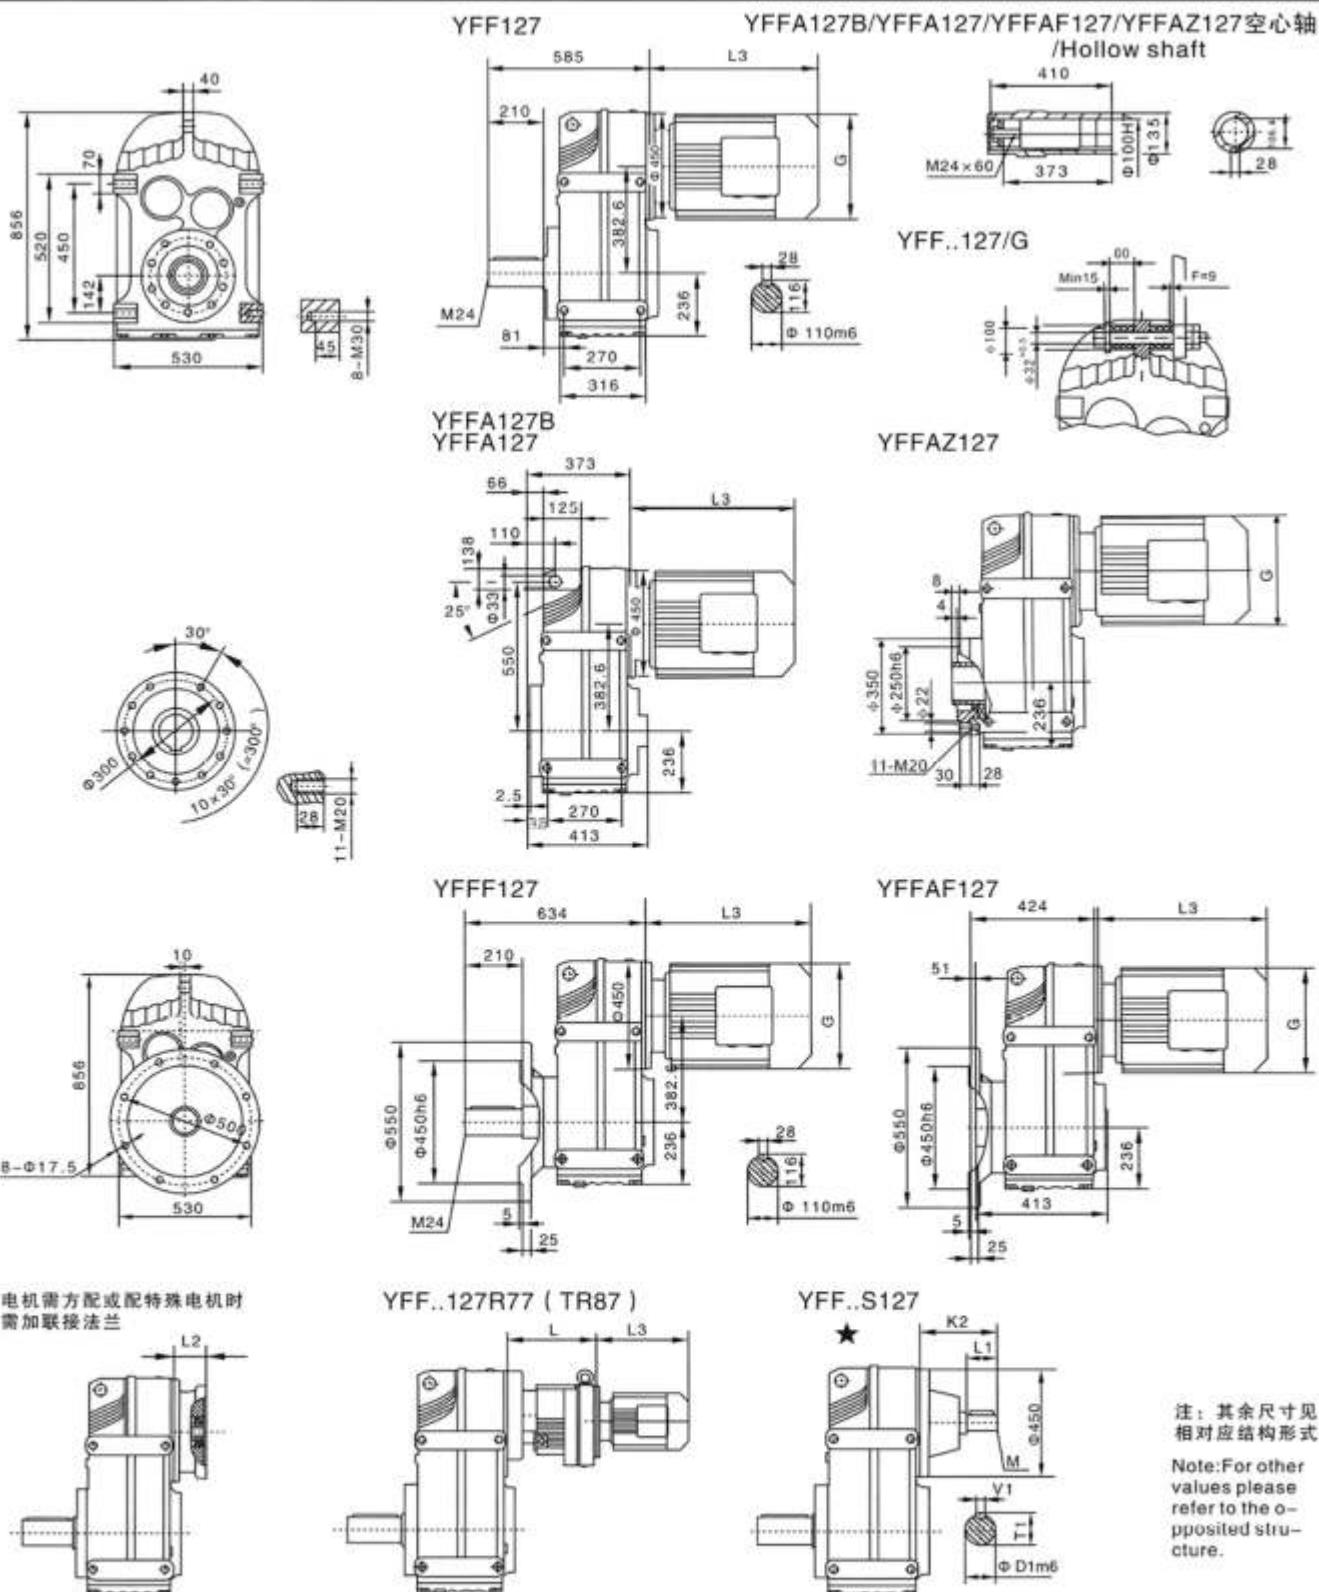


When equipping the user's motor or the special one, the flange is required to be connected.

Y2电机机座号 Motor size	YFF..127R77						YFF..127R87				
	132M	160M	160L	180M	180L	200	225S	225M	250	280S	280M
功率/4P Power/(kW)	7.5	11	15	18.5	22	30	37	45	55	75	90
L3	429	490	535	593	633	658	678	703	784	847	847
G	275	330	330	380	380	420	470	470	510	580	580
L2	117	155	155	155	155	160	190	190	190	190	190

注: 1. 以上壳体为通用件, 安装尺寸均可相互参照 2. YFF..* 表示 YFFA, YFFF, YFFAF, YFFAZ

Note: 1. The above housings are common parts. The mounting dimensions may consult each other. 2. YFF..* mean YFFA, YFFA, YFFF, YFFAF, YFFAZ

★ 查表: 15 See table: 15 查表: 15: i=75-172 查表: 4 i=42-75 查表: 5 i=32-42 查表: 6 i=25-32 查表: 7 i=4-25 查表: 8

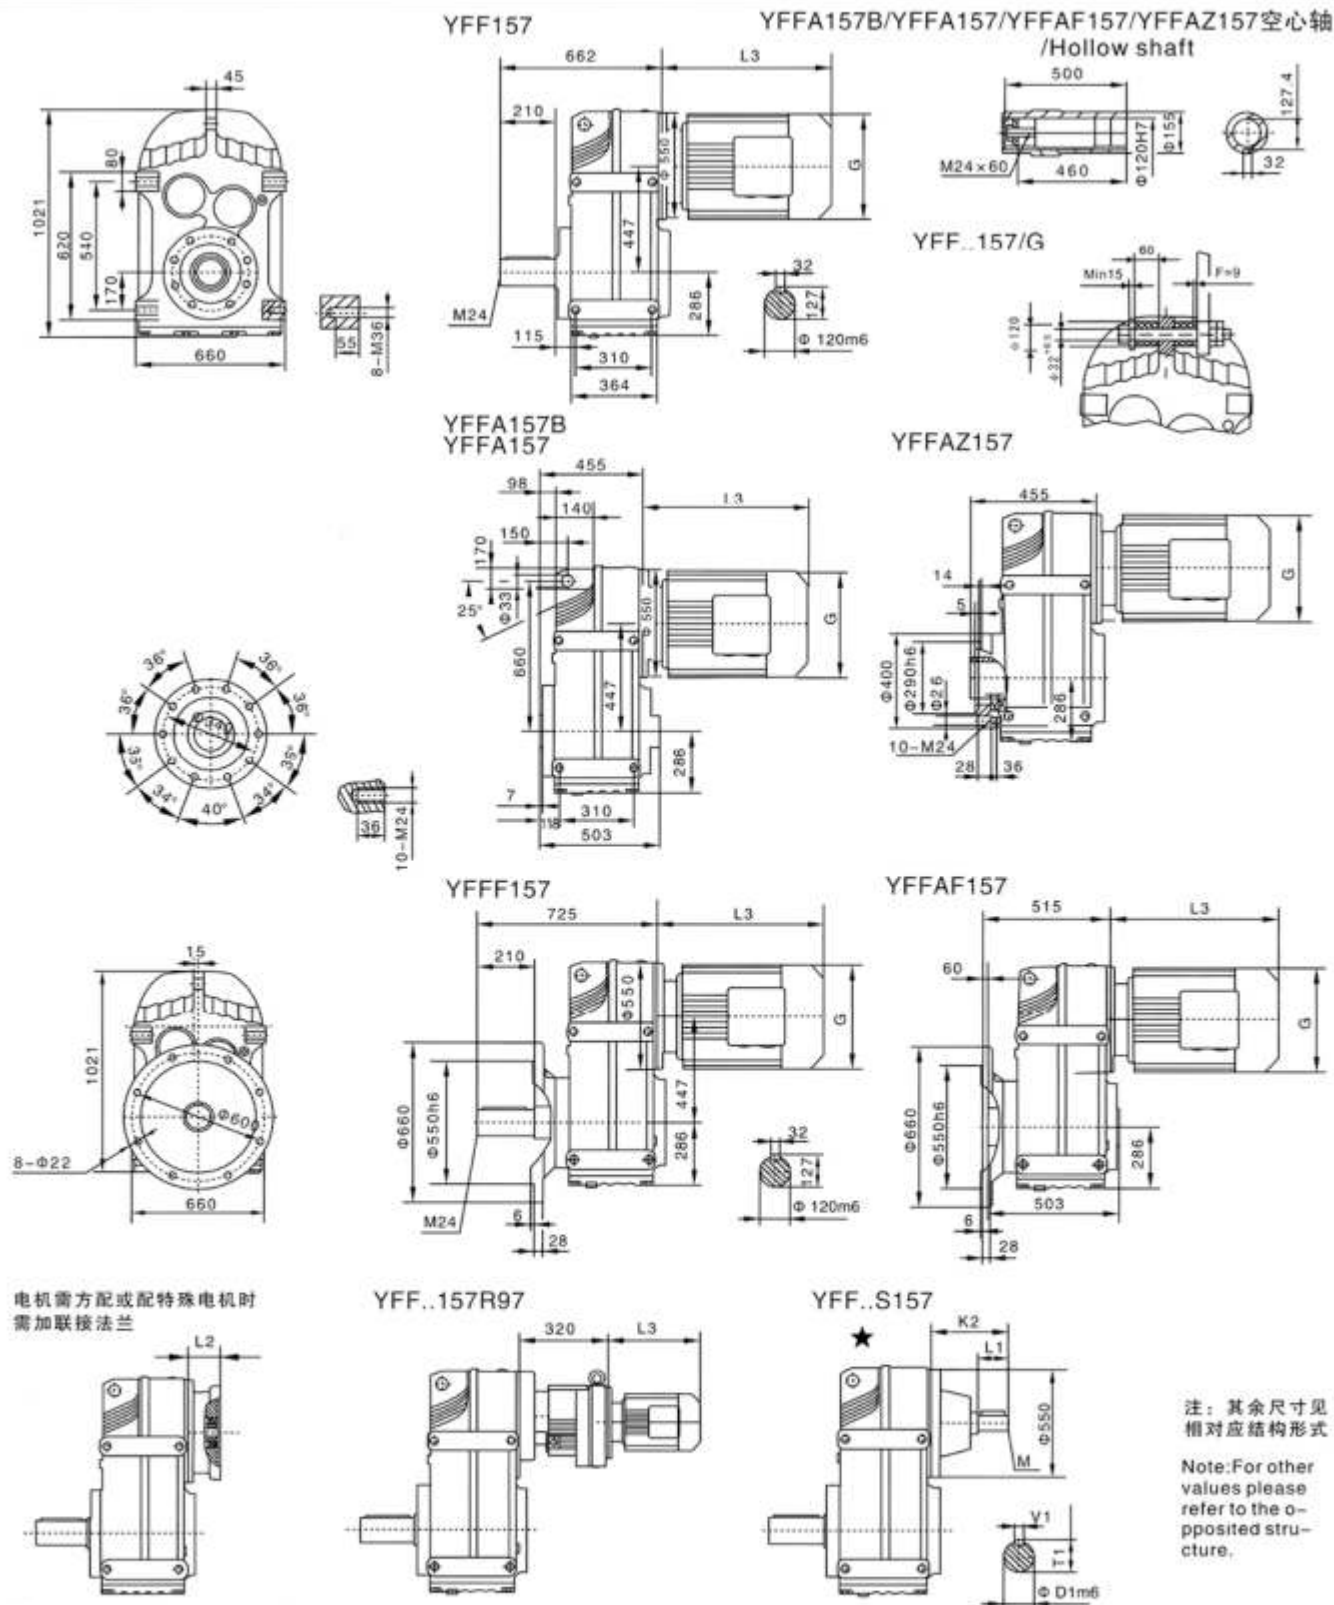

Y2电机机座号 Motor size	160M	160L	180M	180L	200	225S	225M	250	280S	280M	315S	315M	315L
功率/kW Power/(kw)	11	15	18.5	22	30	37	45	55	75	90	110	132	160
L3	492	537	593	633	646	673	698	779	847	847	1100	1180	1270
G	330	330	380	380	420	470	470	510	580	580	645	645	645
L2	155	155	155	155	160	190	190	190	190	190	190	190	190

注: 1. 以上壳体为通用件, 安装尺寸均可相互参照 2. YFF.. 表示YFF, YFFA, YFFF, YFAF, YFFAZ
 Note: 1. The above housings are common parts. The mounting dimensions may consult each other. 2. "YFF" mean YFF, YFFA, YFFF, YFAF, YFFAZ
 ★查表: 15 See table 15: i=53-268查AD5 i=35-53查AD6 i=29-35查AD7 i=10-29查AD8