


YFK SERIES

103

- ★ 三层高密分子涂漆，
隔绝灰尘更耐高温。
- ★ 高端滚珠轴承，
减少摩擦提升传动效率。
- ★ 优质合金钢精密磨齿，
提高啮合精度保证品质。



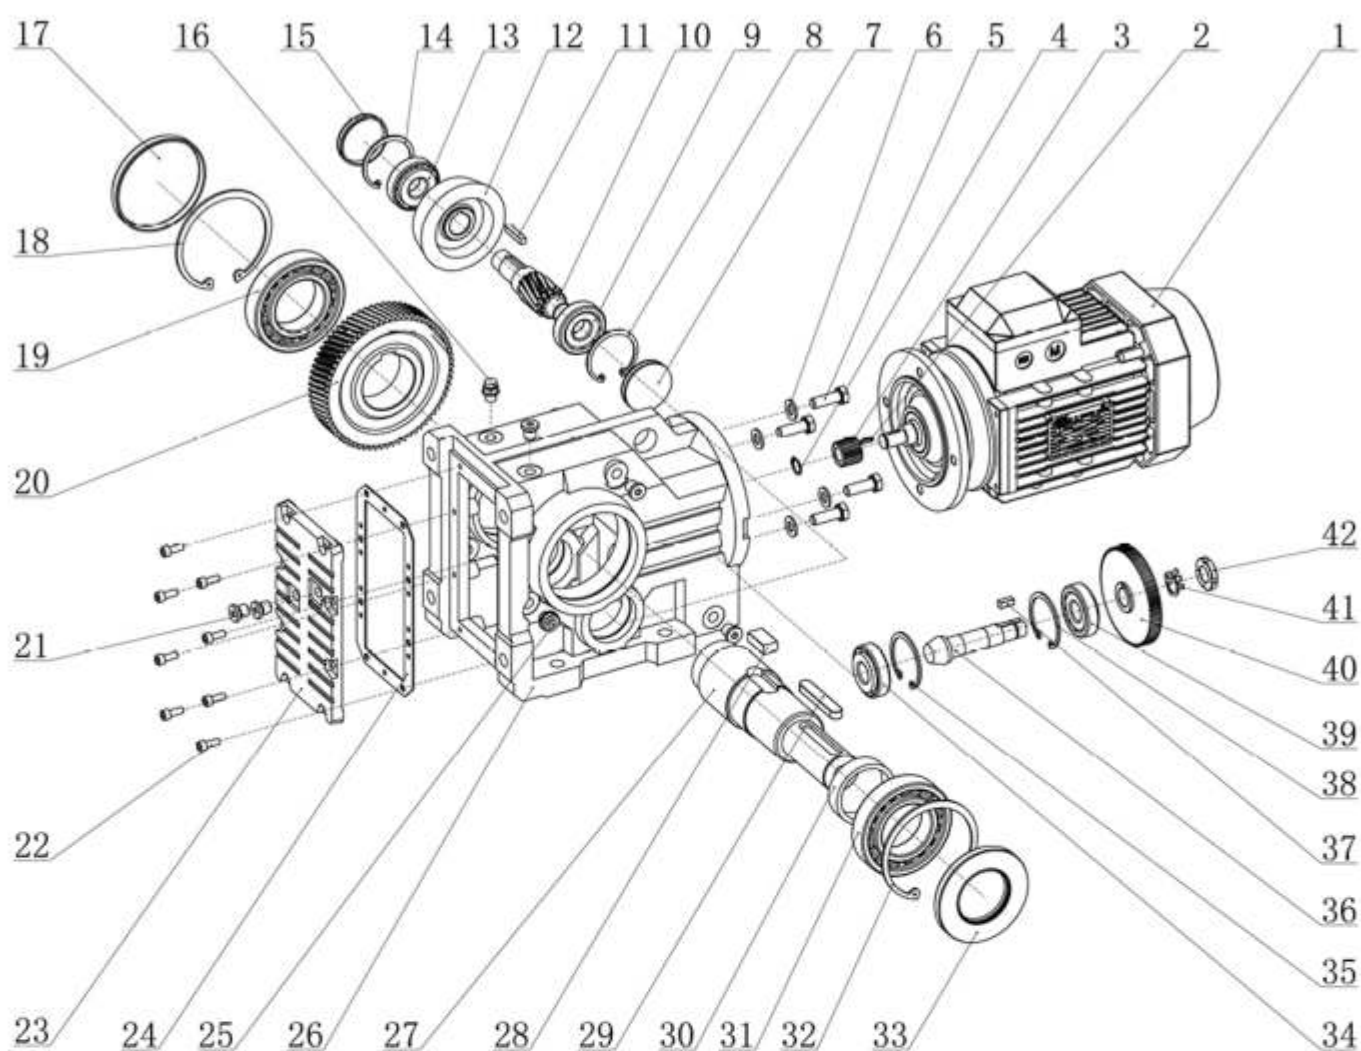


K系列爆炸图

1.电机	12.锥齿轮	23.箱盖	34.轴承
2.平键	13.轴承	24.密封垫	35.孔用卡环
3.齿轮	14.孔用挡圈	25.油镜	36.锥齿轴
4.轴用挡圈	15.平面油封	26.箱体	37.平键
5.螺栓	16.通气帽	27.输出轴	38.孔用挡圈
6.平垫圈	17.平面油封	28.平键	39.轴承
7.平面油封	18.孔用挡圈	29.平键	40.齿轮
8.孔用挡圈	19.轴承	30.轴套	41.止动圈
9.轴承	20.齿轮	31.轴承	42.圆螺母
10.齿轴	21.螺塞	32.孔用挡圈	
11.平键	22.螺钉	33.骨架油封	

YFR.YFF.YFK.YFS

型号与标记:

Type Designations:

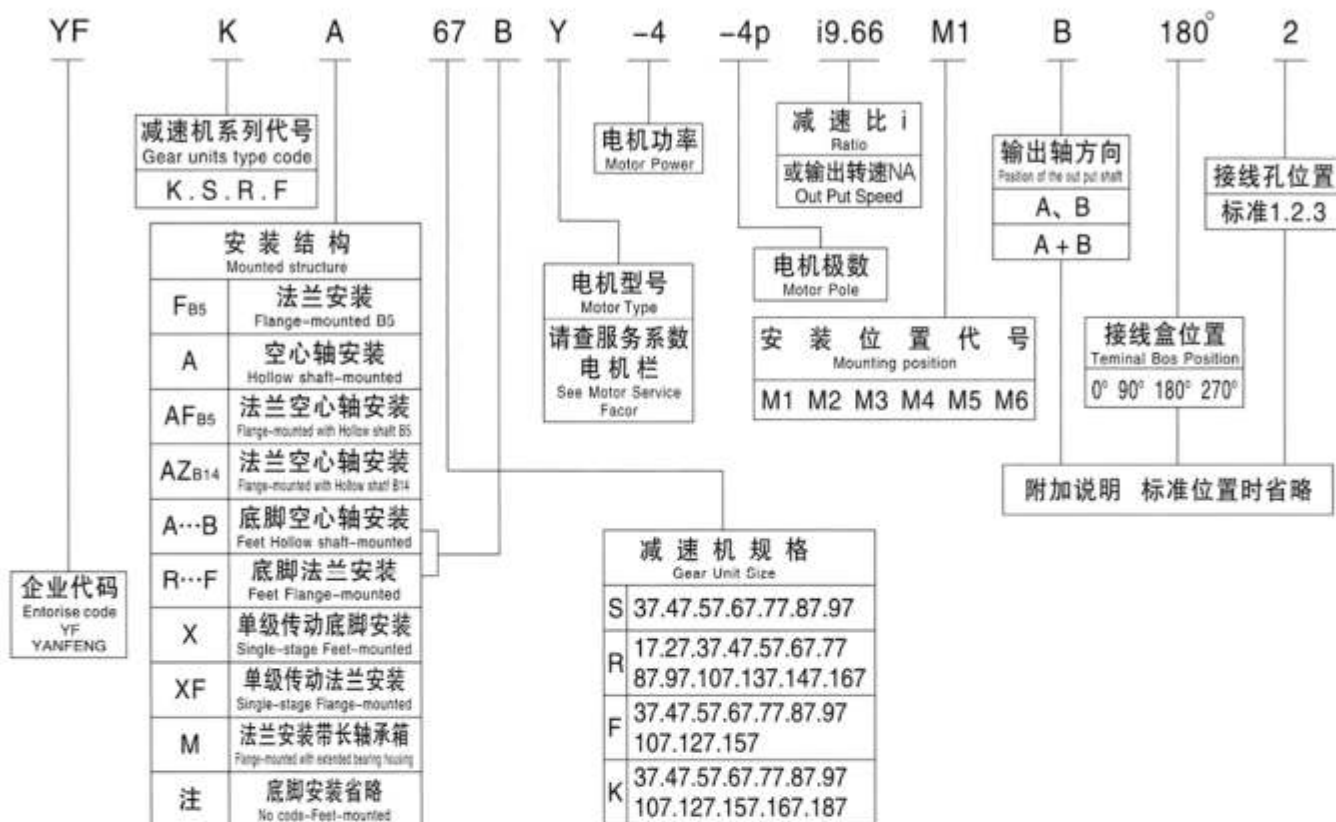

006

选型方法

减速机是按载荷平稳, 每天工作时间一定和少量起停次数的情况设计的, 而在实际使用中往往不是处于此种理想状况, 因此必须按照实际情况的载荷类型、运行时间、起动频率来确定工作机系数 f_1 、原动机系数 f_2 、起动系数 f_3 。使用小于或等于选型表中的服务系数 f_B , 即 $f_1 \times f_2 \times f_3 \leq f_B$ 。或将工作机所需的转矩乘以服务系数 ($f_1 \times f_2 \times f_3$) 应小于或等于减速机的许用转矩。

即 $T_N \geq T_2 \times f_1 \times f_2 \times f_3$

f_1 — 工作机系数 (见表1)

f_2 — 原动机系数 (见表2)

f_3 — 起动系数 (见表3)

T_2 — 工作机所需转矩

T_N — 减速机许用转矩 (见表13)

YFK系列和YFT系列螺旋锥齿减速机如果只承受单向载荷则最好注明旋转方向 (从输出端方向看), 这样有利于改善螺旋锥齿轮的受力状况。

我公司可承接特殊规格产品的订货, 并可为客户提供专用设计服务。

本样本中如有改进之处, 不另作通知, 请谅解。

Type selection method

Gear units are designed under the circumstance of steady load, stated operating time per day and a few starting times, but the practical condition will be not as perfect as the designed circumstance, so we must confirm driven machine factor f_1 , prime mover factor f_2 , starting factor f_3 according to actual load type, operating time, starting frequency. Let it less than or equal to the service factor f_B of selection table, viz $f_1 \times f_2 \times f_3 \leq f_B$, the needed torque of service machine multiply the service factor ($f_1 \times f_2 \times f_3$) should less than or equal to gear units, permissible torque.

Viz $T_N \geq T_2 \times f_1 \times f_2 \times f_3$

f_1 — driven machine factor (see table 1)

f_2 — prime mover factor (see table 2)

f_3 — starting factor (see table 3)

T_2 — the needed torque of driven machine

T_N — gear units, permissible torque (see table 13)

If the K series and T series spiral bevel gear units can only bear single direction load, please indicate the rotating direction (see from output side), which is good for improving the pressing state of the spiral bevel gear.

We accept the orders of products of special specification, and provide our customer with exclusive design service.

Design and specifications are subject to change without notice. Please forgive


输入功率及许用转矩
Input power rating and remissible torque

表13 Table13


机型 TYPE													
规格 SIZE	17	27	37	47	57	67	77	87	97	107	137	147	167
输入功率 INPUT POWER RATING(KW)	0.12-0.75	0.12-3	0.12-3	0.12-5.5	0.12-7.5	0.12-7.5	0.18-11	0.55-22	0.55-30	2.2-45	5.5-55	11-90	11-160
转动比 RATIO	383-8164	3.37-135.09	3.83-134.8	3.83-176.88	4.39-186.89	4.29-199.81	5.31-195.24	5.3-246.54	4.5-289.74	5.04-251.17	5.15-223.6	5-163.31	5-229.71
许用转矩 PERMISSBLE TORQUE(N·M)	87	128	196	305	440	595	705	1310	2110	4380	7910	12700	17700
机型 TYPE													
规格 SIZE	37	57	67	77	87	97	107						
输入功率 INPUT POWER RATING(KW)	0.12-1.1	0.12-5.5	0.12-7.5	1.1-11	3-22	5.5-30	5.5-45						
转动比 RATIO	1.62-4.43	1.3-5.5	1.4-6.07	1.42-5.63	1.39-6.45	1.42-5.79	1.44-6.63						
许用转矩 PERMISSBLE TORQUE(N·M)	20	71	120	215	395	600	810						
机型 TYPE													
规格 SIZE	37	47	57	67	77	87	97	107	127	157			
输入功率 INPUT POWER RATING(KW)	0.12-3	0.12-3	0.12-5.5	0.18-5.5	0.37-11	0.75-22	1.1-30	2.2-45	7.5-90	11-200			
转动比 RATIO	3.77-128.51	8.96-190.76	2.18-199.7	3.97-228.99	4.28-281.71	4.12-270.68	4.57-276.77	6.22-254.4	4.68-170.83	11.92-257.43			
许用转矩 PERMISSBLE TORQUE(N·M)	196	405	605	810	1490	2940	4310	7840	11000	16800			
机型 TYPE													
规格 SIZE	37	47	57	67	77	87	97	107	127	157	167		
输入功率 INPUT POWER RATING(KW)	0.18-3	0.18-3	0.18-5.5	0.18-5.5	0.55-11	0.75-22	1.1-30	3-45	7.5-90	11-200	11-200	18.5-200	
转动比 RATIO	5.36-106.38	5.81-131.87	6.57-145.3	7.28-144.79	7.24-192.18	7.21-197.37	8.71-176.05	8.69-143.47	8.68-146.07	12.65-146.07	17.34-164.5	17.18-179.86	
许用转矩 PERMISSBLE TORQUE(N·M)	156	400	600	785	1510	2760	4300	7210	13000	17800	31500	49400	
机型 TYPE													
规格 SIZE	37	47	57	67	77	87	97						
输入功率 INPUT POWER RATING(KW)	0.12-1.1	0.12-1.5	0.18-3	0.25-5.5	0.75-7.5	0.75-15	1.5-22						
转动比 RATIO	6.8-157.43	7.28-201	7.28-201	7.56-217.41	8.06-256.47	7.88-288	8.26-286.4						
许用转矩 PERMISSBLE TORQUE(N·M)	93	170	245	520	1170	2130	3990						

YFR、YFF、YFK、YFS系列


YFR

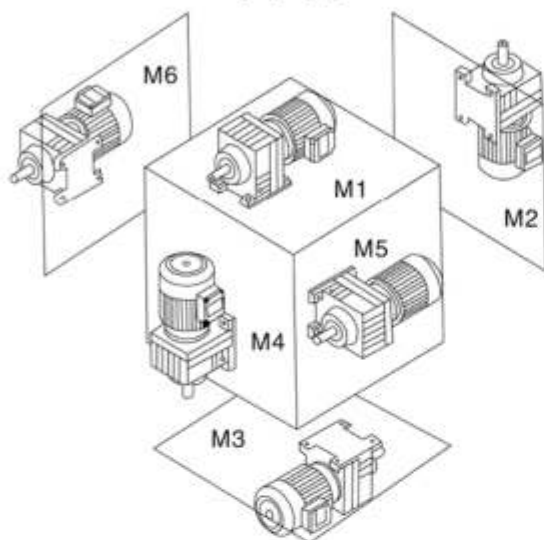


YFF

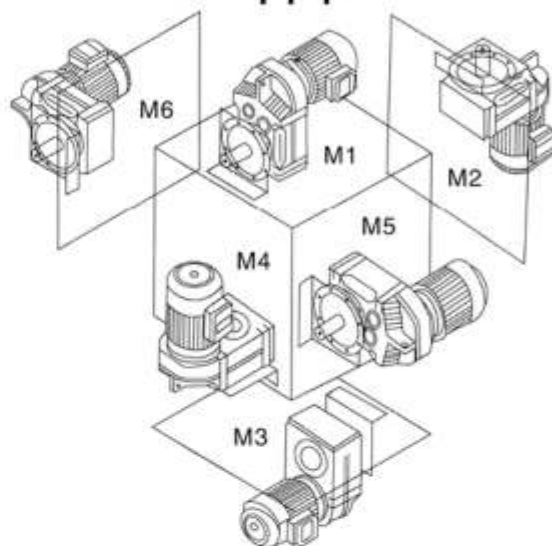

YFK

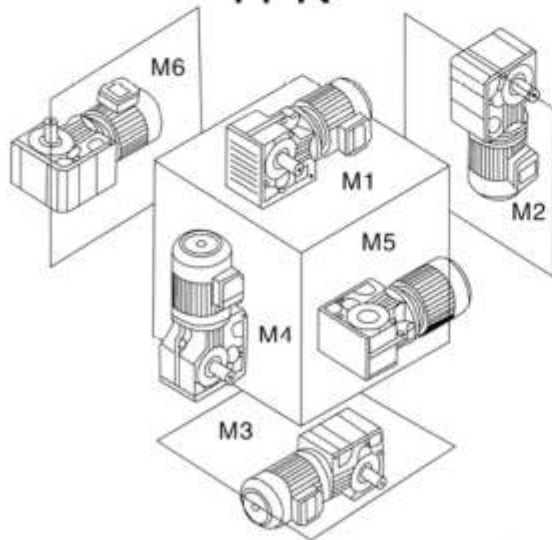

YFS

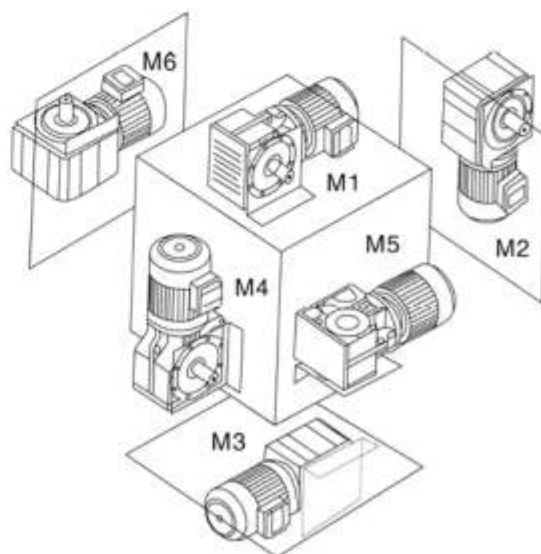


安装位置图例新旧对照

表14 Table14


Old and new installation position position legend constrast

新编号 New NO 旧编号 Old NO	M1	M2	M3	M4	M5	M6
R	B3 	V6 	B8 	V5 	B6 	B7
R..F	B35 	V36 	B85 	V15 	B65 	B75
RF	B5 	V3 	B5II 	V1 	B51 	B511
RX	B3 	V6 	B8 	V5 	B6 	B7
RXF	B5 	V3 	B5II 	V1 	B51 	B5111
F FA..B	B6 	V6 	B6II 	V5 	B3 B8 	B31 B81
FF	B5 	V3 	B5II 	V1 	B51 	B5111
FA FAF FAZ	H1 	H6 	H2 	H5 	H4 	H3
K KA..B	B3 B61 	B6 B81 	B8 	B31 B61 	V5 V51 	V6 V61
KF	B51 B3/B51	B5 B65	B5111 B8/B5111	B511 B6/B511	V1 	V11 V6/V11
KA KAF KAZ	H1 	H4 	H2 	H3 	H5 	H6
S	B3 B61 B811(仅用于S37) 	B6 B81 	B6 B311 	B31 B611 	V5 V51 	V6 V61 V511(仅用于S37)
SF	B51 	B5 	B5111 	B511 	V1 	V11
SA SAF SAZ	H1 	H4 	H2 	H3 	H5 	H6

YFK

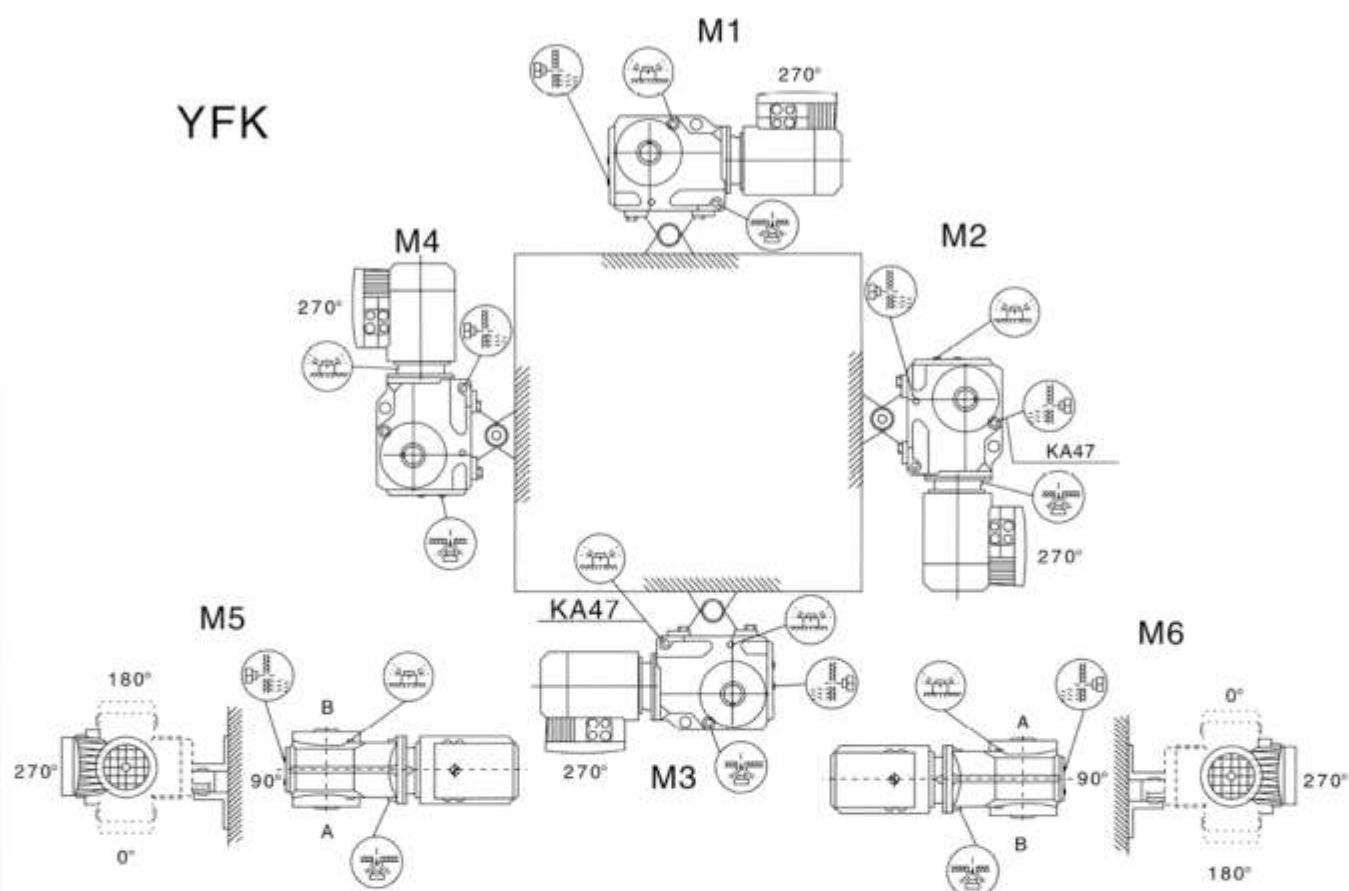

YFS


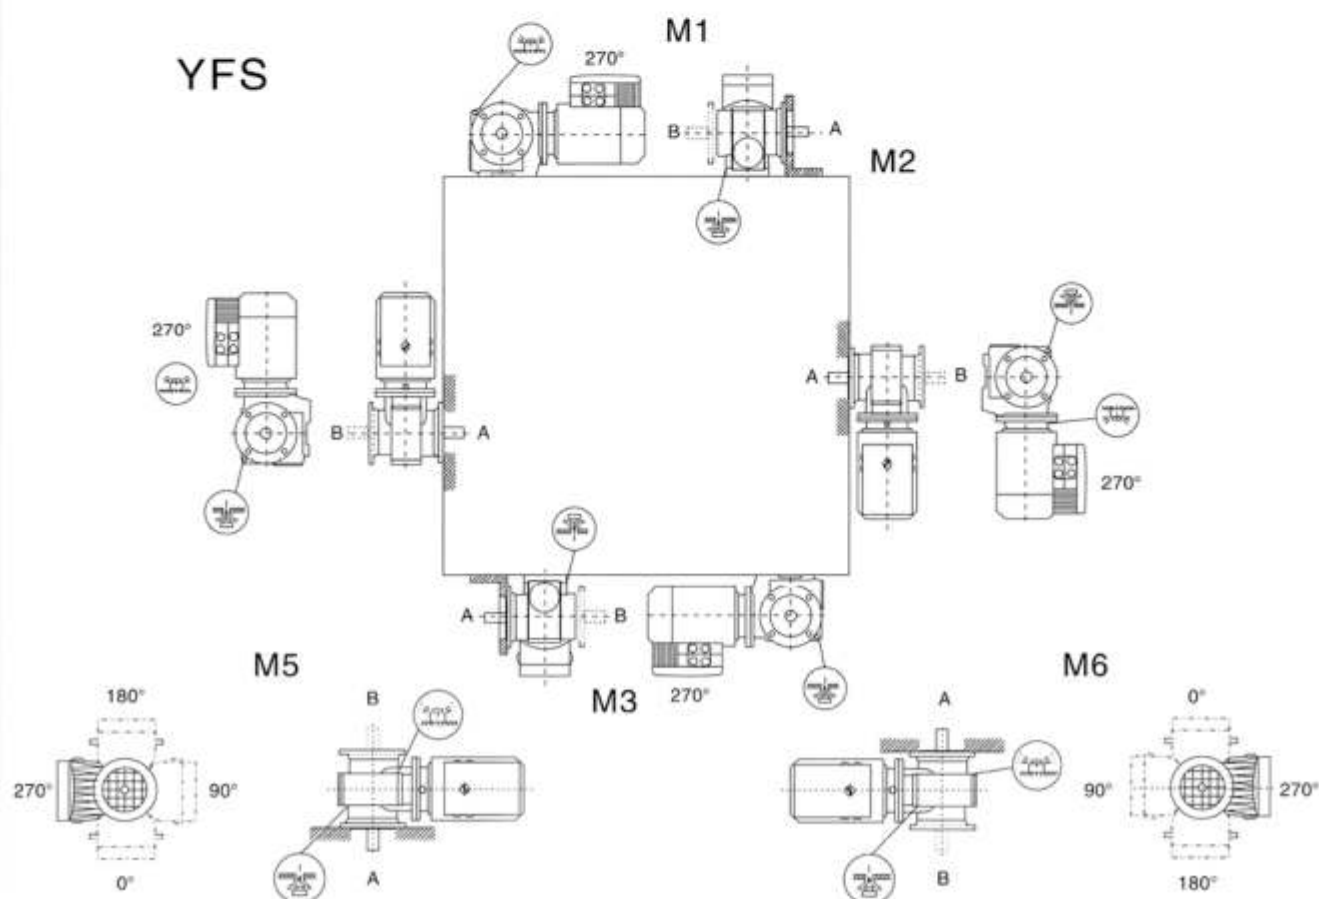


YFRXF


安装完成后将通气孔的
螺塞取下，换上通气塞

	通 气 塞
	油 标
	排 油 塞


012

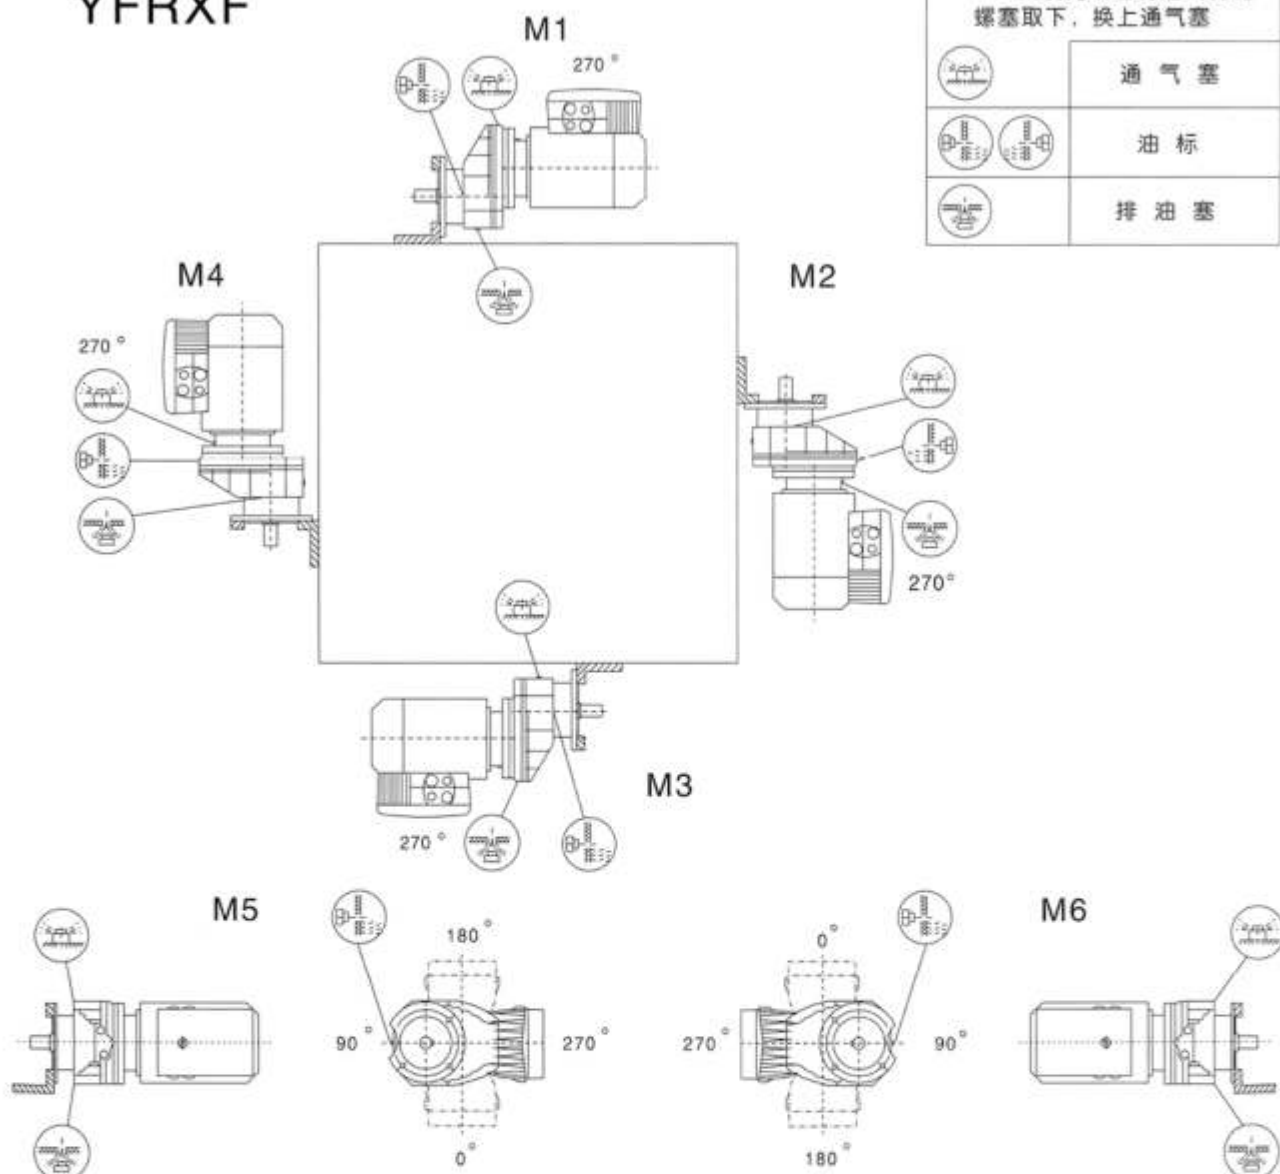

接线盒 标准安装型式

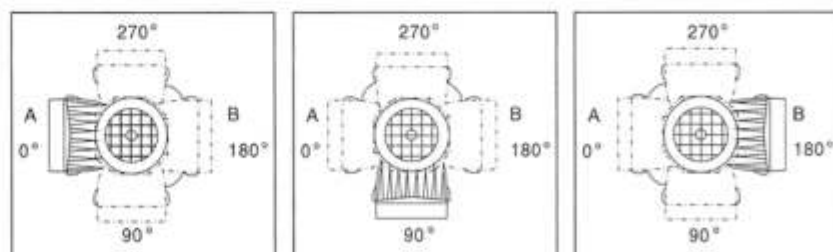

接线盒 特殊安装型式:



接 线 孔 位 置 “标准”，“1”，“2” 或 “3”
(DR63仅用于“标准”和“2”)

YFR.YFF.YFK.YFS...AD

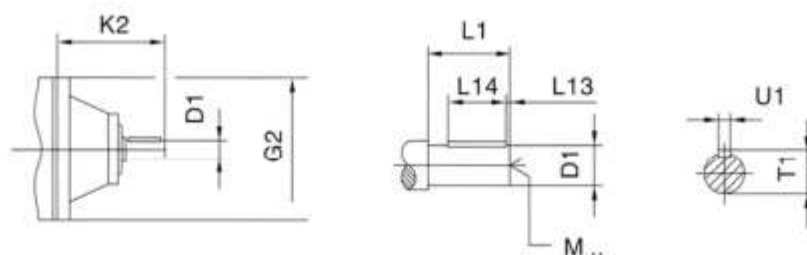


表15 Table15

		G2	K2	D1	L1	L13	L14	T1	U1	M
YFS37 YFR27 YFR37 YFS47 YFF37 YFF47 YFS57 YFK37	AD1	120	102	16	40	4	32	18	5	M5
	AD2		130	19	40	4	32	21.5	6	M6
YFR47 YFR57 YFR67 YFS67 YFF57 YFF67 YFK47 YFK57 YFK67	AD2	160	123	19	40	4	32	21.5	6	M6
	AD3		159	24	50	5	40	27	8	M8
YFS77 YFR77 YFF77 YFK77	AD2	200	116	19	40	4	32	21.5	6	M6
	AD3		151	24	50	5	40	27	8	M8
	AD4		224	38	80	5	70	41	10	M12
YFS87 YFR87 YFF87 YFK87	AD2	250	111	19	40	4	32	21.5	6	M6
	AD3		156	28	60	5	50	31	8	M10
	AD4		219	38	80	5	70	41	10	M12
	AD5		292	42	110	10	70	45	12	M16
YFS97 YFR97 YFF97 YFK97	AD3	300	151	28	60	5	50	31	8	M10
	AD4		214	38	80	5	70	41	10	M12
	AD5		287	42	110	10	70	45	12	M16
	AD6		327	48	110	10	80	51.5	14	M16
YFR107 YFF107 YFK107	AD3	350	145	28	60	5	50	31	8	M10
	AD4		208	38	80	5	70	41	10	M12
	AD5		281	42	110	10	70	45	12	M16
	AD6		321	48	110	10	80	51.5	14	M16
YFR137	AD4	400	201	38	80	5	70	41	10	M12
	AD5		274	42	110	10	70	45	12	M16
	AD6		314	48	110	10	80	51.5	14	M16
	AD7		308	55	110	10	90	59	16	M20
YFR147 YFF127 YFK127	AD4	450	193	38	80	5	70	41	10	M12
	AD5		266	42	110	10	70	45	12	M16
	AD6		306	48	110	10	80	51.5	14	M16
	AD7		300	55	110	10	90	59	16	M20
	AD8		383	70	140	15	110	74.5	20	M20
YFR167 YFF157 YFK157 YFK167 YFK187	AD5	550	258	42	110	15	70	45	12	M16
	AD6		298	48	110	10	80	51.5	14	M16
	AD7		292	55	110	10	90	59	16	M20
	AD8		374	70	140	15	110	74.5	20	M20

输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outside F _a N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outside F _a N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
0.12kW								0.12kW							
0.08	11800	17550	79800	1.10	YFK127R77	4	470	0.99	920	1388	18600	1.70	YFK77R37	4	69
0.09	10700	16006	80400	1.20	YFK127R77	4	510	1.1	810	1218	19000	1.90	YFK127R37	4	77
0.11	8010	12440	81500	1.60	YFK127R77	4	440	1.3	710	1053	19200	2.2	YFK127R37	4	62
0.13	6920	10915	81800	1.90	YFK127R77	4	480	1.5	620	924	19500	2.5	YFK127R37	4	70
0.14	6320	9819	82000	2.1				1.7	550	815	19600	2.8			
0.16	5220	8443	82300	2.5				2.0	440	709	19800	3.5			
0.18	4820	7482	82300	2.7				2.2	385	622	19900	4.0			
0.10	9590	14311	65000	0.85	YFK107R77	4	310	1.0	930	1351	9230	0.90	YFK67R37	4	45
0.11	8060	12211	65000	1.00	YFK107R77	4	320	1.2	795	1171	10500	1.05	YFK107R37	4	51
0.13	6930	10677	65000	1.15	YFK107R77	4	280	1.3	695	1034	11300	1.20	YFK107R37	4	42
0.14	6280	9524	65000	1.25	YFK107R77	4	305	1.5	585	903	12000	1.40	YFK107R37	4	48
0.17	5410	8328	65000	1.50				1.7	545	793	12200	1.50			
0.19	4720	7270	65000	1.70				2.0	440	697	12700	1.85			
0.22	3760	6184	65000	2.1				2.2	390	613	12900	2.1			
0.24	3320	5662	65000	2.4				2.5	340	542	13000	2.4			
0.27	3020	5138	65000	2.7				2.9	315	471	13000	2.6			
0.32	2700	4359	65000	3.0				3.3	265	420	13000	3.1			
								3.8	235	361	13000	3.5			
0.17	5310	8054	39500	0.80	YFK97R57	4	180	4.3	210	323	13000	3.9			
0.20	4350	6970	40000	1.00	YFK97R57	4	200	4.9	176	279	13000	4.7			
0.23	3890	6027	40000	1.10	YFK97R57	4	160	5.6	155	246	13000	5.3			
0.26	3560	5391	40000	1.20	YFK97R57	4	185	6.3	134	217	13000	6.1			
0.30	2950	4669	40000	1.45											
0.34	2640	4082	40000	1.65				1.5	585	906	7750	1.05	YFK57R37	4	39
0.39	2320	3583	40000	1.85				1.7	525	806	8220	1.15	YFK157R37	4	44
0.44	2040	3108	40000	2.1				2.0	445	699	8690	1.35	YFK157R37	4	37
0.50	1720	2757	40000	2.5				2.2	390	615	8930	1.55	YFK157R37	4	43
0.57	1580	2419	40000	2.7				2.5	340	544	9120	1.75			
0.65	1370	2123	40000	3.2				2.9	310	473	9250	1.95			
0.74	1220	1856	40000	3.5				3.3	265	421	9420	2.3			
0.85	1000	1625	40000	4.3				3.8	235	362	9510	2.5			
0.96	860	1430	40000	5.0				4.3	210	319	9610	2.9			
1.1	830	1261	40000	5.2				4.9	176	280	9710	3.4			
1.2	725	1102	40000	5.9				5.6	155	246	9770	3.9			
								6.4	135	215	9830	4.4			
0.26	3380	5240	26300	0.80	YFK87R57	4	120	7.2	122	192	9860	4.9			
0.30	2850	4562	27100	0.95	YFK87R57	4	130								
0.34	2610	4037	27400	1.05	YFK87R57	4	105	2.2	430	639	2520	0.95	YFK47R37	4	33
0.38	2330	3609	27700	1.15	YFK87R57	4	120	2.5	370	552	6350	1.10	YFK47R37	4	36
0.44	1990	3107	28100	1.35				2.8	315	495	6930	1.25	YFK47R37	4	32
0.51	1700	2728	28300	1.60				3.2	280	426	7240	1.45	YFK47R37	4	35
0.58	1500	2371	28500	1.80				3.7	235	375	7560	1.70			
0.66	1380	2088	28600	1.95				4.2	215	327	7670	1.85			
0.74	1220	1854	28700	2.2				4.8	189	289	7830	2.1			
0.83	1090	1657	28700	2.5											
0.97	930	1415	28800	2.9				4.0	235	346	4840	0.85	YFK37R17	4	19
1.1	800	1229	28900	3.4				4.5	200	304	5640	1.00	YFK37R17	4	21
1.3	695	1078	28900	3.9				5.2	182	267	5830	1.10	YFK37R17	4	19
1.5	585	951	29000	4.6				5.9	157	234	6060	1.25	YFK37R17	4	20
1.6	505	837	29000	5.4				6.7	138	205	6220	1.45			
1.9	435	726	29000	6.2				7.6	120	181	6330	1.65			
								8.6	105	160	6420	1.90			
0.51	1790	2717	13400	0.85	YFK77R37	4	69	10	88	136	6500	2.3			
0.58	1510	2370	15700	1.05	YFK77R37	4	78								
0.67	1380	2050	16500	1.10	YFK77R37	4	62	6.2	184	144.79	13000	4.4	YFK67	6	34
0.78	1180	1772	17500	1.30	YFK77R37	4	70						YFK167	6	40
0.91	1010	1514	18300	1.55									YFK167	6	31
													YFK167	6	37

输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
0.12kW								0.18kW							
6.2	185	145.14	9680	3.2	YFK57	6	28	0.28	4960	4669	39900	0.85	YFK97R57	4	180
7.3	158	123.85	9760	3.8	YFK57	6	33	0.32	4390	4082	40000	1.00	YFK97R57	4	200
8.3	138	108.29	9820	4.3	YFKA57	6	26	0.37	3860	3583	40000	1.10	YFKA97R57	4	160
8.8	131	102.88	9840	4.6	YFKAF57	6	32	0.42	3370	3108	40000	1.25	YFKAF97R57	4	185
10	115	90.26	9880	5.2				0.48	2910	2757	40000	1.50			
12	98	76.56	9930	6.2				0.55	2640	2419	40000	1.65			
								0.62	2290	2123	40000	1.90			
9.5	121	145.14	9870	5.0	YFK57	4	28	0.71	2030	1856	40000	2.1			
11	103	123.85	9920	5.8	YFK57	4	33	0.81	1710	1625	40000	2.5			
13	85	102.88	9960	7.0	YFKA57	4	26	0.92	1490	1430	40000	2.9			
15	75	90.26	9990	8.0	YFKAF57	4	32	1.0	1380	1261	40000	3.1			
								1.2	1210	1102	40000	3.6			
6.8	168	131.87	7930	2.4	YFK47	6	22	1.4	1040	957	40000	4.1			
7.4	155	121.48	7990	2.6	YFK47	6	26	1.5	930	855	40000	4.6			
8.6	133	104.37	8070	3.0	YFKA47	6	22	1.8	755	743	40000	5.7			
					YFKAF47	6	24	2.0	675	652	40000	6.4			
10	110	131.87	8140	3.7	YFK47	4	22								
11	101	121.48	8170	4.0	YFK47	4	26	0.42	3330	3107	26400	0.80	YFK87R57	4	120
					YFKA47	4	22	0.48	2880	2728	27100	0.95	YFK87R57	4	130
					YFKAF47	4	24	0.56	2520	2371	27500	1.05	YFKAF87R57	4	105
													YFKAF87R57	4	120
8.5	136	106.38	6230	1.50	YFK37	6	16								
9.2	125	97.81	6300	1.60	YFK37	6	18	0.63	2290	2088	27800	1.20	YFK87R57	4	120
11	107	83.69	6410	1.90	YFKA37	6	16	0.71	2030	1854	28000	1.35	YFK87R57	4	125
12	92	72.54	6480	2.2	YFKAF37	6	17	0.80	1820	1657	28200	1.50	YFKAF87R57	4	105
								0.93	1540	1415	28400	1.75	YFKAF87R57	4	120
13	88	106.38	6500	2.3	YFK37	4	16	1.1	1340	1229	28600	2.0			
14	81	97.81	6530	2.5	YFK37	4	18	1.2	1160	1078	28700	2.3			
16	70	83.69	6570	2.9	YFK37	4	16	1.4	1000	951	28800	2.7			
19	60	72.54	6600	3.3	YFKAF37	4	17	1.6	870	837	28800	3.1			
20	56	67.80	6610	3.5				1.8	755	726	28900	3.6			
24	49	58.60	6430	4.1											
28	41	49.79	6130	4.8				0.87	1670	1514	14500	0.95	YFK77R37	4	69
31	37	44.46	5930	5.4				0.95	1530	1388	15500	1.00	YFK77R37	4	77
36	32	37.97	5660	6.3				1.1	1340	1218	16700	1.15	YFKA77R37	4	62
39	30	35.57	5550	6.8				1.2	1170	1053	17600	1.35	YFKAF77R37	4	70
46	25	29.96	5270	8.0				1.4	1030	924	18200	1.50			
48	24	28.83	5210	8.4				1.6	910	815	18700	1.70			
55	21	24.99	4980	9.6				1.9	750	709	19100	2.1			
59	19	23.36	4880	10				2.1	655	622	19400	2.4			
68	17	20.19	4660	11				2.4	590	552	19500	2.6			
80	14	17.15	4430	13				2.7	515	485	19700	3.0			
90	13	15.31	4280	14				3.1	455	428	19800	3.4			
105	11	13.08	4070	15				3.6	400	367	19900	3.9			
114	10	12.14	3970	16											
0.18kW								1.5	980	903	5660	0.85	YFK67R37	4	45
0.09	16300	14975	73200	0.80	YFK127R77	4	470	1.7	890	793	9620	0.90	YFK67R37	4	51
0.11	13400	12440	79000	0.95	YFK127R77	4	510	1.9	745	697	10900	1.10	YFKA67R37	4	42
0.12	11600	10915	79900	1.10	YFK127R77	4	440	2.2	655	613	11600	1.25	YFKAF67R37	4	48
0.13	10500	9819	80400	1.25	YFKAF127R77	4	480	2.4	580	542	12000	1.40			
0.16	8850	8443	81100	1.45				2.8	520	471	12300	1.60			
0.18	8040	7482	81400	1.60				3.2	445	420	12600	1.85			
0.20	6990	6565	81800	1.85				3.7	395	361	12800	2.1			
0.23	5940	5804	82100	2.2				4.1	350	323	13000	2.3			
0.26	5220	5027	82300	2.5				4.7	295	279	13000	2.8			
0.30	4530	4423	82400	2.9											
0.34	3960	3889	82500	3.3				2.2	660	615	5580	0.90	YFK57R37	4	39
0.40	3310	3311	82600	3.9				2.4	580	544	7800	1.05	YFK57R37	4	44
								2.8	515	473	8300	1.15	YFKA57R37	4	37
0.16	8990	8328	65000	0.90	YFK107R77	4	310	3.1	450	421	8670	1.35	YFKAF57R37	4	43
0.18	7850	7270	65000	1.00	YFK107R77	4	320	3.6	395	362	8900	1.50			
0.21	6420	6184	65000	1.25	YFK107R77	4	280	4.1	350	319	9100	1.75			
0.23	5760	5662	65000	1.40	YFKAF107R77	4	305	4.7	300	280	9290	2.0			
0.26	5230	5138	65000	1.55				5.4	260	246	9420	2.3			
0.30	4570	4359	65000	1.75				6.1	230	215	9540	2.6			
0.35	4000	3810	65000	2.0				6.9	205	192	9610	2.9			
0.39	3440	3358	65000	2.3				7.9	178	166	9700	3.4			
0.44	3090	2977	65000	2.6											
0.51	2700	2599	65000	3.0											
0.58	2340	2286	65000	3.4											

输出转速 output speed na r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed na r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
0.18kW								0.18kW							
3.5	400	375	5930	1.00	YFK47R37	4	33	77	22	17.15	4430	8.1	YFK37	4	16
4.0	360	327	6440	1.10	YFKF47R37	4	36	86	20	15.31	4280	8.8	YFKF37	4	18
4.6	315	289	6920	1.25	YFKA47R37	4	32	101	17	13.08	4080	9.7	YFKA37	4	16
5.2	275	256	7290	1.45	YFKA47R37	4	35	109	16	12.14	3980	10	YFKA37	4	17
5.9	245	225	7500	1.65				126	14	10.49	3810	12			
6.7	210	198	7710	1.90				148	12	8.91	3620	14			
7.7	183	171	7860	2.2				166	10	7.96	3490	15			
8.6	164	153	7950	2.4				0.25kW							
10	142	131	8040	2.8				0.13	15300	9819	75300	0.85	YFK127R77	4	470
								0.15	13000	8443	79200	1.00	YFKF127R77	4	510
6.4	225	205	5300	0.90	YFK37R17	4	19	0.17	11700	7482	79900	1.10	YFKA127R77	4	440
7.3	199	181	5650	1.00	YFKF37R17	4	21	0.20	10200	6565	80600	1.30	YFKA127R77	4	480
8.2	175	160	5900	1.15	YFKA37R17	4	19	0.22	8770	5804	81200	1.50			
9.7	148	136	6140	1.35	YFKA37R17	4	20	0.26	7670	5027	81600	1.70			
10	140	127	6200	1.45				0.29	6680	4423	81900	1.95			
								0.33	5850	3889	82100	2.2			
6.0	285	144.79	13000	2.9	YFK67	6	35	0.39	4930	3311	82300	2.6			
7.0	245	123.54	13000	3.4	YFKF67	6	40								
8.1	215	108.03	13000	3.8	YFKA67	6	32	0.21	9440	6184	65000	0.85	YFK107R77	4	310
8.5	205	102.62	13000	4.0	YFKA67	6	38	0.23	8520	5662	65000	0.95	YFKF107R77	4	320
								0.25	7730	5138	65000	1.05	YFKA107R77	4	285
9.1	189	144.79	13000	4.3	YFK67	4	34	0.30	6700	4359	65000	1.20	YFKA107R77	4	305
11	161	123.54	13000	5.1	YFKF67	4	40	0.34	5850	3810	65000	1.35			
12	141	108.03	13000	5.8	YFKA67	4	31	0.39	5070	3358	65000	1.60			
					YFKA67	4	37	0.44	4540	2977	65000	1.75			
6.0	285	145.14	9340	2.1	YFK57	6	29	0.50	3970	2599	65000	2.0			
7.0	245	123.85	9480	2.5	YFKF57	6	34	0.57	3450	2286	65000	2.3			
8.0	215	108.29	9590	2.8	YFKA57	6	27	0.67	2930	1939	65000	2.7			
8.5	205	102.88	9620	3.0	YFKA57	6	32	0.76	2640	1713	65000	3.0			
9.6	178	90.26	9700	3.4				0.84	2390	1554	65000	3.3			
								0.97	2060	1336	65000	3.9			
9.1	189	145.14	9670	3.2	YFK57	4	28	0.42	4890	3108	40000	0.90	YFK97R77	4	180
11	161	123.85	9750	3.7	YFKF57	4	33	0.47	4250	2757	40000	1.00	YFKF97R77	4	200
12	141	108.29	9810	4.3	YFKA57	4	26	0.54	3840	2419	40000	1.10	YFKA97R77	4	160
13	134	102.88	9830	4.5	YFKA57	4	32	0.61	3340	2123	40000	1.30	YFKA97R77	4	185
15	118	90.26	9880	5.1				0.70	2950	1856	40000	1.45			
17	100	76.56	9920	6.0				0.80	2520	1625	40000	1.70			
								0.91	2190	1430	40000	1.95			
6.6	260	131.87	7380	1.55	YFK47	6	23	1.0	2010	1261	40000	2.1			
7.2	240	121.48	7530	1.65	YFKF47	6	26	1.2	1750	1102	40000	2.5			
8.3	205	104.37	7740	1.95	YFKA47	6	22	1.4	1520	957	40000	2.8			
9.6	180	90.86	7880	2.2	YFKA47	6	25	1.5	1360	855	40000	3.2			
10	168	85.12	7930	2.4				0.62	3320	2088	26400	0.80	YFK87R57	4	120
								0.70	2950	1854	27000	0.90	YFKF87R57	4	125
10	172	131.87	7910	2.3	YFK47	4	22	0.78	2640	1657	27400	1.00	YFKA87R57	4	105
11	158	121.48	7970	2.5	YFKF47	4	26	0.92	2250	1415	27800	1.20	YFKA87R57	4	120
13	136	104.37	8060	2.9	YFKA47	4	22	1.1	1950	1229	28100	1.40			
15	118	90.86	8120	3.4	YFKA47	4	24	1.2	1700	1078	28300	1.60			
16	111	85.12	8140	3.6				1.4	1470	951	28500	1.85			
8.2	210	106.38	5520	0.95	YFK37	6	17	1.5	1280	837	28600	2.1			
8.9	193	97.81	5710	1.05	YFKF37	6	19	1.8	1110	726	28700	2.4			
10	165	83.69	5990	1.20	YFKA37	6	16	2.0	990	638	28800	2.7			
12	143	72.54	6170	1.40	YFKA37	6	18	1.2	1690	1053	14300	0.90	YFK77R37	4	70
								1.4	1480	924	15800	1.05	YFKF77R37	4	78
12	139	106.38	6210	1.45	YFK37	4	16	1.6	1310	815	16900	1.20	YFKA77R37	4	62
14	127	97.81	6280	1.55	YFKF37	4	18	1.8	1100	709	17900	1.40	YFKA77R37	4	70
16	109	83.69	6400	1.85	YFKA37	4	16	2.1	960	622	18400	1.60			
18	95	72.54	6470	2.1	YFKA37	4	17	2.3	860	552	18800	1.80			
19	88	67.80	6500	2.3				2.7	755	485	19100	2.0			
23	76	58.60	6280	2.6				3.0	665	428	19300	2.3			
27	65	49.79	6010	3.1				3.5	580	367	19500	2.7			
30	58	44.46	5830	3.5				4.0	515	328	19700	3.0			
35	49	37.97	5580	4.1				4.5	460	290	19800	3.4			
37	46	35.57	5480	4.3				5.2	395	252	19900	3.9			
44	39	29.96	5220	5.1				5.9	345	221	19900	4.5			
46	38	28.83	5160	5.3				6.7	305	195	20000	5.1			
53	33	24.99	4950	6.2				7.4	270	175	20000	5.7			
57	30	23.36	4850	6.4											
65	26	20.19	4650	7.0											

输出转速 output speed n/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
0.25kW								0.25kW							
2.1	960	613	7350	0.85	YFK67R37	4	46	9.9	240	131.87	7510	1.65	YFK47	4	23
2.4	850	542	10100	0.95	YFK67R37	4	51	11	225	121.48	7640	1.80	YFKF47	4	26
2.8	755	471	10900	1.10	YFK67R37	4	43	12	192	104.37	7820	2.1	YFKA47	4	22
3.1	655	420	11600	1.25	YFKAF67R37	4	49	14	167	90.86	7930	2.4	YFKAF47	4	25
3.6	575	361	12000	1.45				15	156	85.12	7980	2.6			
4.0	510	323	12400	1.60											
4.7	435	279	12700	1.90				11	225	83.69	5300	0.90	YFK37	6	18
5.3	385	246	12900	2.1				12	197	72.54	5680	1.00	YFKF37	6	20
6.0	335	217	13000	2.4				13	184	67.80	5810	1.10	YFKA37	6	17
								15	159	58.60	6050	1.25	YFKAF37	6	19
								18	135	49.79	6230	1.50			
3.1	655	421	5750	0.90	YFK57R37	4	40								
3.6	575	362	7840	1.05	YFKF57R37	4	45	12	195	106.38	5690	1.00	YFK37	4	17
4.1	505	319	8380	1.20	YFKA57R37	4	38	13	180	97.81	5860	1.10	YFKF37	4	19
4.7	435	280	8720	1.35	YFKAF57R37	4	43	16	154	83.69	6090	1.30	YFKA37	4	16
5.3	385	246	8950	1.55				18	133	72.54	6250	1.50	YFKAF37	4	18
6.1	335	215	9150	1.80				19	125	67.80	6230	1.60			
6.8	300	192	9280	2.0				22	108	58.60	6030	1.85			
7.8	260	166	9430	2.3				26	91	49.79	5810	2.2			
9.0	225	145	9550	2.7				29	82	44.46	5650	2.5			
10	205	129	9620	2.9				34	70	37.97	5430	2.9			
12	173	111	9720	3.5				37	65	35.57	5340	3.1			
13	152	97	9780	4.0				43	55	29.96	5100	3.6			
								45	53	28.83	5050	3.8			
4.4	540	154.02	19600	2.9	YFK77	8	65	52	46	24.99	4860	4.4			
5.0	475	135.28	19700	3.3	YFKF77	8	73	56	43	23.36	4770	4.6			
5.3	450	128.52	19800	3.4	YFKA77	8	58	64	37	20.19	4580	5.0			
6.0	400	113.56	19900	3.9	YFKAF77	8	65	76	32	17.15	4370	5.7			
								85	28	15.31	4230	6.2			
4.6	520	192.18	19700	2.8	YFK77	6	61	99	24	13.08	4030	6.9			
4.9	485	179.37	19700	3.0	YFKF77	6	69	107	22	12.14	3940	7.2			
5.7	420	154.02	19800	3.7	YFKA77	6	54	124	19	10.49	3780	8.3			
6.5	365	135.28	19900	4.2	YFKAF77	6	61	146	16	8.91	3590	9.8			
								163	15	7.96	3470	11			
5.5	435	123.54	12700	1.90	YFK67	8	39	191	13	6.80	3310	12			
6.3	380	108.03	12900	2.2	YFKF67	8	45	204	12	6.37	3240	12			
6.6	360	102.62	12900	2.3	YFKA67	8	37	0.37kW							
7.6	315	90.04	13000	2.6	YFKAF67	8	42	0.18	16600	7482	72600	0.80	YFKJ27R77	4	470
								0.21	14500	6565	76900	0.90	YFKF127R77	4	510
6.1	395	144.79	12800	2.1	YFK67	6	36	0.24	12600	5804	79400	1.05	YFKAF127R77	4	445
7.1	335	123.54	13000	2.5	YFKF67	6	42	0.27	11000	5027	80200	1.20	YFKAF127R77	4	480
8.1	295	108.03	13000	2.8	YFKA67	6	34	0.31	9610	4423	80800	1.35			
8.6	280	102.62	13000	3.0	YFKAF67	6	39	0.35	8430	3889	81300	1.55			
								0.42	7120	3311	81700	1.85			
9.0	265	144.79	13000	3.1	YFK67	4	35	0.72	4230	1926	82500	3.1			
11	225	123.54	13000	3.6	YFKF67	4	40	0.79	3860	1757	82500	3.4			
12	198	108.03	13000	4.1	YFKA67	4	32	0.90	3360	1541	82600	3.9			
13	189	102.62	13000	4.3	YFKAF67	4	38								
								0.36	8380	3810	65000	0.95	YFKJ07R77	4	310
6.1	395	145.14	8910	1.50	YFK57	6	30	0.41	7300	3358	65000	1.10	YFKF07R77	4	325
7.1	335	123.85	9150	1.80	YFKF57	6	35	0.46	6510	2977	65000	1.25	YFKA07R77	4	285
8.1	295	108.29	9310	2.0	YFKA57	6	28	0.53	5690	2599	65000	1.40	YFKAF07R77	4	305
8.6	280	102.88	9360	2.2	YFKAF57	6	34	0.60	4970	2286	65000	1.60			
9.8	245	90.26	9480	2.5				0.71	4210	1939	65000	1.90			
11	210	76.56	9610	2.9				0.81	3790	1713	65000	2.1			
								0.89	3440	1554	65000	2.3			
9.0	265	145.14	9410	2.2	YFK57	4	29	1.0	2950	1336	65000	2.7			
11	225	123.85	9540	2.6	YFKF57	4	34	1.2	2580	1166	65000	3.1			
12	199	108.29	9640	3.0	YFKA57	4	27								
13	189	102.88	9670	3.2	YFLAF57	4	32								
14	166	90.26	9740	3.6				0.65	4770	2123	40000	0.90	YFK97R57	4	180
17	141	76.56	9810	4.3				0.74	4200	1856	40000	1.00	YFKF97R57	4	200
								0.85	3610	1625	40000	1.20	YFKA97R57	4	160
6.7	360	131.87	6470	1.10	YFK47	6	25	0.96	3160	1430	40000	1.35	YFKAF97R57	4	185
7.2	330	121.48	6780	1.20	YFKF47	6	28	1.1	2850	1261	40000	1.50			
8.4	285	104.37	7210	1.40	YFKA47	6	24	1.2	2490	1102	40000	1.70			
9.7	245	90.86	7480	1.60	YFKAF47	6	27	1.4	2160	957	40000	2.0			
10	230	85.12	7590	1.75				1.6	1930	855	40000	2.2			
								1.9	1620	743	40000	2.7			
								2.1	1430	652	40000	3.0			
								2.4	1280	573	40000	3.4			

输出转速 output speed na r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhang load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed na r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhang load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
0.37kW								0.37kW							
0.97	3200	1415	26600	0.85	YFK87R57	4	120	7.3	485	123.54	12500	1.70	YFK67	6	38
1.1	2770	1229	27200	0.95	YFK87R57	4	130	8.3	425	108.03	12700	1.95	YFK67	6	44
1.3	2420	1078	27600	1.10	YFK87R57	4	110	8.8	405	102.62	12800	2.0	YFK67	6	36
1.5	2110	951	27900	1.30	YFK87R57	4	120	10	355	90.04	13000	2.3	YFK67	6	41
1.6	1850	837	28200	1.45				9.5	370	144.79	12900	2.2	YFK67	4	36
1.9	1600	726	28400	1.70				11	315	123.54	13000	2.6	YFK67	4	42
2.2	1420	638	28500	1.90				13	275	108.03	13000	3.0	YFK67	4	34
2.5	1240	562	28600	2.2				15	230	90.04	13000	3.6	YFK67	4	39
2.9	1040	474	28800	2.6				18	196	76.37	13000	4.2			
3.2	940	426	28800	2.9				7.3	485	123.85	8490	1.25	YFK57	6	32
3.7	810	373	28900	3.3				8.3	425	108.29	8770	1.40	YFK57	6	37
								8.8	405	102.88	8870	1.50	YFK57	6	30
1.7	1860	815	10600	0.85	YFK77R37	4	71	10	355	90.26	9070	1.70	YFK57	6	36
2.0	1580	709	15200	1.00	YFK77R37	4	79	12	300	76.56	9280	2.0			
2.2	1380	622	16500	1.10	YFK77R37	4	63	13	270	69.12	9390	2.2			
2.5	1230	552	17300	1.25	YFK77R37	4	71	9.5	370	145.14	9000	1.60	YF57	4	30
2.8	1080	485	18000	1.45				11	315	123.85	9220	1.90	YFK57	4	35
3.2	950	428	18500	1.60				13	275	108.29	9370	2.2	YFK57	4	28
3.8	830	367	18900	1.85				15	230	90.26	9530	2.6	YFK57	4	34
4.2	735	328	19200	2.1				18	196	76.56	9650	3.1			
4.8	655	290	19400	2.4				20	177	69.12	9700	3.4			
5.5	565	252	19600	2.8				8.6	410	104.37	5490	1.00	YFK47	6	27
6.2	495	221	19700	3.1				9.9	355	90.86	6480	1.10	YFK47	6	30
7.1	435	195	19800	3.5				11	335	85.12	6730	1.20	YFK47	6	26
7.9	390	175	19900	4.0				12	295	75.20	7100	1.35	YFK47	6	29
9.0	340	154	19900	4.5				10	340	131.87	6690	1.20	YFK47	4	25
								11	310	121.48	6960	1.30	YFK47	4	28
3.3	940	420	9000	0.90	YFK67R37	4	47	13	265	104.37	7330	1.50	YFK47	4	24
3.8	820	361	10300	1.00	YFK67R37	4	52	15	235	90.86	7580	1.70	YFK47	4	27
4.3	725	323	11100	1.15	YFK67R37	4	44	16	220	85.12	7670	1.85			
4.9	625	279	11800	1.30	YFK67R37	4	50	18	193	75.20	7810	2.1			
5.6	550	246	12200	1.50				20	179	69.84	7880	2.2			
6.3	485	217	12500	1.70				22	162	63.30	7960	2.5			
7.2	430	191	12700	1.90				14	250	97.81	2520	0.80	YFK37	4	18
8.3	370	166	12900	2.2				16	215	83.69	5470	0.95	YFK37	4	20
9.6	320	144	13000	2.5				19	186	72.54	5690	1.10	YFK37	4	17
11	275	122	13000	3.0				20	174	67.80	5630	1.15	YFK37	4	19
								24	150	58.60	5510	1.35			
4.9	625	280	7430	0.95	YFK57R37	4	41	28	128	49.79	5350	1.55			
5.6	550	246	8040	1.10	YFK57R37	4	45	31	114	44.46	5230	1.75			
6.4	480	215	8520	1.25	YFK57R37	4	39	36	97	37.97	5060	2.1			
7.2	430	192	8750	1.40	YFK57R37	4	44	39	91	35.57	4990	2.2			
8.3	370	166	9000	1.60				46	77	29.96	4800	2.6			
9.6	325	145	9200	1.85				48	74	28.83	4750	2.7			
11	290	129	9320	2.1				55	64	24.99	4590	3.1			
12	245	111	9480	2.4				59	60	23.36	4510	3.3			
14	215	97	9580	2.8				68	52	20.19	4350	3.6			
								80	44	17.15	4160	4.1			
3.9	910	174.19	28800	3.0	YFK87	8	105	90	39	15.31	4040	4.5			
4.1	850	164.34	28900	3.2	YFK87	8	115	105	34	13.08	3860	4.9			
4.6	765	147.32	28900	3.5	YFK87	8	93	114	31	12.14	3780	5.1			
					YFK87	8	105	132	27	10.49	3630	5.9			
4.6	775	197.37	28900	3.5	YFK87	6	99	155	23	8.91	3460	7.0			
5.2	685	174.19	28900	4.0	YFK87	6	110	173	20	7.96	3350	7.6			
					YFK87	6	86	203	17	6.80	3190	8.6			
5.0	705	135.28	19300	2.2	YFK77	8	70	217	16	6.37	3130	8.9			
5.3	670	128.52	19300	2.3	YFK77	8	78	257	14	5.36	2970	10			
6.0	590	113.56	19500	2.6	YFK77	8	63	0.08	55900	16978	179800	0.90	YFK187R97	4	1760
7.0	505	97.05	19700	3.1	YFK77	8	70	0.10	46500	14272	190000	1.10			
					YFK77	6	71	0.12	37400	11647	190000	1.35	YFK187R97	4	1760
5.8	605	154.02	19500	2.6	YFK77	6	63	0.19	23900	7343	190000	2.1			
6.7	530	135.28	19600	2.9	YFK77	6	71	0.12	38400	11573	150000	0.85	YFK167R97	4	1180
7.0	505	128.52	19700	3.1	YFK77	6	56	0.13	33800	10264	150000	0.95			
7.9	445	113.56	19800	3.5	YFK77	6	63	0.16	28100	8628	150000	1.15	YFK167R97	4	1180
					YFK77	4	61	0.21	21400	6562	150000	1.50			
7.2	490	192.18	19700	3.0	YFK7	4	61	0.25	17200	5355	150000	1.85			
7.7	460	179.37	19800	3.2	YFK7	4	69	0.33	13200	4079	150 000	2.4			
9.0	395	154.02	19900	3.9	YFK7	4	54								
					YFK7	4	61								
6.3	560	108.03	12100	1.45	YFK67	8	44								
6.6	535	102.62	12300	1.55	YFK67	8	50								
7.6	470	90.04	12600	1.75	YFK67	8	42								
					YFK67	8	47								

输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
0.55kW								0.55kW							
0.20	22400	6881	109700	0.80	YFK157R97	4	790	4.9	960	279	7360	0.85	YFK67R37	4	49
0.23	19300	5931	111500	0.95	YFKF157R97	4	870	5.5	840	246	10100	0.95	YFKF67R37	4	54
0.34	13000	3979	114400	1.40	YFKA157R97	4	750	6.2	745	217	10900	1.10	YFKA67R37	4	46
0.45	9940	3051	115300	1.80	YFKA157R97	4	810	7.1	660	191	11500	1.25	YFKA157R37	4	52
								8.2	570	166	12100	1.45			
0.31	14900	4423	76200	0.85	YFK127R77	4	475	9.4	495	144	12400	1.65			
0.35	13000	3889	79200	1.00	YFKF127R77	4	520	11	420	122	12700	1.95			
0.41	11100	3311	80200	1.20	YFKA127R77	4	445								
0.45	10000	3009	80700	1.30	YFKA127R77	4	480	7.1	660	192	5180	0.90	YFK57R37	4	43
0.52	8630	2607	81200	1.50				8.2	575	166	7850	1.05	YFKF57R37	4	47
0.71	6560	1926	81900	2.0				9.4	495	145	8430	1.20	YFKA57R37	4	41
0.77	5980	1757	82100	2.2				11	445	129	8680	1.35	YFKA157R37	4	46
0.88	5220	1541	82300	2.5				12	380	111	8970	1.60			
1.0	4570	1342	82400	2.8				14	335	97	9150	1.80			
1.2	3990	1177	82500	3.3											
1.3	3490	1025	82600	3.7											
								3.9	1350	174.19	28600	2.0	YFK87	8	105
0.46	10100	2977	65000	0.80	YFK107R77	4	315	4.1	1270	164.34	28600	2.1	YFKF87	8	115
0.52	8770	2599	65000	0.90	YFKF107R77	4	325	4.6	1140	147.32	28700	2.4	YFKA87	8	94
0.59	7690	2286	65000	1.05	YFKA107R77	4	285								
0.70	6520	1939	65000	1.25	YFKA107R77	4	310	4.6	1150	197.37	28700	2.3	YFK87	6	100
0.79	5850	1713	65000	1.35				5.2	1020	174.19	28800	2.7	YFKF87	6	110
0.87	5310	1554	65000	1.50				5.5	960	164.34	28800	2.8	YFKA87	6	88
1.0	4570	1336	65000	1.75				6.1	860	147.32	28900	3.1	YFKA187	6	100
1.2	3990	1166	65000	2.0											
1.3	3450	1030	65000	2.3				5.0	1040	135.28	18100	1.50	YFK77	8	71
1.5	3000	904	65000	2.7				5.3	990	128.52	18300	1.55	YFKF77	8	79
1.7	2700	793	65000	3.0				6.0	880	113.56	18700	1.75	YFKA77	8	64
2.0	2360	696	65000	3.4				7.0	750	97.05	19100	2.1	YFKA177	8	71
2.2	2050	615	65000	3.9											
								5.8	900	154.02	18700	1.70	YFK77	6	65
0.95	4880	1430	40000	0.90	YFK97R57	4	180	6.7	790	135.28	19000	1.95	YFKF77	6	73
1.1	4380	1261	40000	1.00	YFKF97R57	4	205	7.0	750	128.52	19100	2.1	YFKA77	6	58
1.2	3820	1102	40000	1.15	YFKA97R57	4	165	7.9	665	113.56	19400	2.3	YFKA177	6	65
1.4	3320	957	40000	1.30	YFKA197R57	4	190								
1.6	2960	855	40000	1.45				8.8	595	154.02	19500	2.6	YFK77	4	63
1.8	2520	743	40000	1.70				10	520	135.28	19700	3.0	YFKF77	4	71
2.1	2220	652	40000	1.95				11	495	128.52	19700	3.1	YFKA77	4	56
2.4	1970	573	40000	2.2				12	440	113.56	19800	3.5	YFKA177	4	63
2.7	1700	504	40000	2.5				14	375	97.05	19900	4.1			
3.1	1470	437	40000	2.9											
3.6	1300	382	40000	3.3				7.3	720	123.54	11100	1.15	YFK67	6	39
4.5	1040	305	40000	4.1				8.3	630	108.03	11700	1.30	YFKF67	6	45
								8.8	600	102.62	11900	1.35	YFKA67	6	36
1.4	3260	951	26500	0.85	YFK87R57	4	120	10	525	90.04	12300	1.55	YFKA167	6	41
1.6	2860	837	27100	0.95	YFKF87R57	4	130	12	445	76.37	12600	1.85			
1.9	2480	726	27600	1.10	YFKA87R57	4	110								
2.1	2190	638	27900	1.25	YFKA187R57	4	125	11	475	123.54	12500	1.70	YFK67	4	39
2.4	1920	562	28100	1.40				13	415	108.03	12800	1.95	YFKF67	4	44
2.9	1620	474	28400	1.65				15	350	90.04	13000	2.4	YFKA67	4	36
3.2	1450	426	28500	1.85				18	295	76.37	13000	2.8	YFKA167	4	41
3.7	1260	373	28600	2.1											
4.1	1110	330	28700	2.4				8.3	630	108.29	7360	0.95	YFK57	6	33
4.6	990	294	28800	2.7				8.8	600	102.88	7630	1.00	YFKF57	6	38
5.4	850	250	28900	3.2				10	525	90.26	8220	1.15	YFKA57	6	31
5.8	800	236	28900	3.4				12	445	76.56	8670	1.35	YFKA157	6	37
6.8	680	201	28900	4.0				13	405	69.12	8870	1.50			
								15	355	60.81	9070	1.70			
2.5	1900	552	5780	0.80	YFK77R37	4	73	16	335	57.42	9150	1.80			
2.8	1670	485	14500	0.95	YFKF77R37	4	81								
3.2	1470	428	15900	1.05	YFKA77R37	4	65	11	480	123.85	8520	1.25	YFK57	4	32
3.7	1270	367	17100	1.20	YFKA177R37	4	73	13	420	108.29	8800	1.45	YFKF57	4	37
4.2	1130	328	17800	1.35				15	350	90.26	9100	1.70	YFKA57	4	30
4.7	1000	290	18300	1.55				18	295	76.56	9300	2.0	YFKA157	4	36
5.4	870	252	18800	1.80				20	265	69.12	9410	2.2			
6.2	760	221	19100	2.0				22	235	60.81	9520	2.6			
7.0	670	195	19300	2.3				24	220	57.42	9560	2.7			
7.8	600	175	19500	2.6											
8.2	530	154	19600	2.9				13	405	104.37	5880	1.00	YFK47	4	27
								15	350	90.86	6550	1.15	YFKF47	4	30
								16	330	85.12	6790	1.20	YFKA47	4	26
								18	290	75.20	7150	1.40	YFKA147	4	29
								19	270	69.84	7310	1.50			

输出转速 output speed n _a r/min	输出转矩 output torque M _a N·m	传动比 Ratio i	径向载荷 Permissible overhung load output side F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque M _a N·m	传动比 Ratio i	径向载荷 Permissible overhung load output side F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg
0.55kW								0.75kW							
21	245	63.30	7500	1.65	YFK47	4	27	1.2	5180	1102	39700	0.85	YFK97R57	4	185
24	220	56.83	7660	1.80	YFK47	4	30	1.4	4490	957	40000	0.95	YFK97R57	4	205
28	189	48.95	7830	2.1	YFKA47	4	26	1.6	4020	855	40000	1.05	YFKA97R57	4	165
30	178	46.03	7880	2.2	YFKAF47	4	29	1.9	3430	743	40000	1.25	YFKAF97R57	4	190
								2.1	3020	652	40000	1.40			
23	225	58.60	4850	0.90	YFK37	4	20	2.4	2680	573	40000	1.60			
27	192	49.79	4790	1.05	YFKF37	4	22	2.7	2320	504	40000	1.85			
31	172	44.46	4740	1.15	YFKA37	4	19	3.2	2010	437	40000	2.1			
36	147	37.97	4640	1.35	YFKAF37	4	21	3.6	1770	382	40000	2.4			
38	137	35.57	4600	1.45				4.5	1420	305	40000	3.0			
45	116	29.96	4470	1.75				5.4	1190	258	40000	3.6			
47	111	28.83	4440	1.80				5.9	1080	232	40000	4.0			
54	97	24.99	4320	2.1				6.9	920	199	40000	4.7			
58	90	23.36	4260	2.2											
67	78	20.19	4130	2.4				1.9	3370	726	26300	0.80	YFK97R57	4	125
79	66	17.15	3980	2.7				2.2	2970	638	26900	0.90	YFK97R57	4	130
89	59	15.31	3880	3.0				2.5	2610	562	27400	1.05	YFKA97R57	4	110
104	51	13.08	3730	3.3				2.9	2200	474	27900	1.25	YFKAF97R57	4	125
112	47	12.14	3660	3.4				3.2	1980	426	28100	1.35			
130	41	10.49	3520	4.0				3.7	1720	373	28300	1.55			
153	34	8.91	3370	4.7				4.2	1520	330	28500	1.80			
171	31	7.96	3270	5.1				4.7	1350	294	28600	2.0			
200	26	6.80	3130	5.7				5.5	1160	250	28700	2.3			
214	25	6.37	3070	5.9				5.8	1100	236	28700	2.5			
254	21	5.36	2920	6.8				6.9	930	201	28800	2.9			
0.75kW								3.8	1720	367	14000	0.90	YFK77R37	4	74
0.11	58400	13116	175300	0.85	YFKJ87R97	4	1770	4.2	1540	328	15500	1.00	YFKJ77R37	4	82
0.12	51500	11647	187300	0.95	YFKA87R97	4	1770	4.8	1360	290	16600	1.15	YFKA77R37	4	66
0.19	32800	7343	190000	1.50				5.5	1180	252	17500	1.30	YFKAF77R37	4	74
0.20	30000	6747	190000	1.65				6.2	1030	221	18200	1.50			
0.23	26500	5991	190000	1.90				3.9	1830	176.05	40000	2.3	YFK97	8	175
								4.5	1590	153.21	40000	2.7	YFKF97	8	195
								4.9	1460	140.28	40000	3.0	YFKA97	8	155
0.16	38600	8628	150000	0.85	YFKJ67R97	4	1180						YFKAF97	8	180
0.21	29300	6562	150000	1.10	YFKA67R97	4	1180	4.7	1530	147.32	28500	1.75	YFK87	8	115
0.26	23700	5355	150000	1.35				5.4	1320	126.91	28600	2.0	YFKJ87	8	125
0.34	18200	4079	150000	1.75				6.0	1200	115.82	28700	2.2	YFKA87	8	100
0.41	15100	3376	150000	2.1				6.7	1070	102.71	28700	2.5	YFKAF87	8	115
0.35	17800	3979	112300	1.00	YFKJ57R97	4	790	5.2	1390	174.19	28600	1.95	YFK87	6	105
0.45	13600	3051	114100	1.30	YFKF57R97	4	870	5.5	1310	164.34	28600	2.1	YFKJ87	6	115
0.83	7440	1659	115900	2.4	YFKA57R97	4	750	6.1	1170	147.32	28700	2.3	YFKA87	6	93
1.0	6040	1365	116200	3.0	YFKAF57R97	4	810	7.1	1010	126.91	28800	2.7	YFKAF87	6	105
0.42	15100	3311	75800	0.85	YFKJ27R77	4	475	7.0	1020	197.37	28800	2.6	YFK87	4	100
0.46	13700	3009	78600	0.95	YFKF27R77	4	520	7.9	900	174.19	28800	3.0	YFKJ87	4	110
0.53	11800	2607	79800	1.10	YFKA27R77	4	445	8.4	850	164.34	28900	3.2	YFKA87	4	88
0.72	8930	1926	81100	1.45	YFKAF27R77	4	485	9.4	765	147.32	28900	3.5	YFKAF87	4	100
0.79	8150	1757	81400	1.60											
0.90	7120	1541	81700	1.85				6.7	1080	135.28	18000	1.45	YFK77	6	70
1.0	6220	1342	82000	2.1				7.0	1020	128.52	18200	1.50	YFKF77	6	78
1.2	5440	1177	82200	2.4				7.9	900	113.56	18700	1.70	YFKA77	6	63
1.4	4750	1025	82400	2.7				9.3	770	97.05	19100	2.0	YFKAF77	6	70
1.5	4150	899	82500	3.1				10	710	88.97	19200	2.2			
0.81	7960	1713	65000	1.00	YFKJ07R77	4	315	9.0	800	154.02	19000	1.95	YFK77	4	65
0.89	7230	1554	65000	1.10	YFKF07R77	4	325	10	700	135.28	19300	2.2	YFKF77	4	73
1.0	6210	1336	65000	1.30	YFKA07R77	4	285	11	665	128.52	19300	2.3	YFKA77	4	58
1.2	5420	1166	65000	1.50	YFKAF07R77	4	310	12	590	113.56	19500	2.6	YFKAF77	4	65
1.3	4710	1030	65000	1.70				14	505	97.05	19700	3.1			
1.5	4120	904	65000	1.95											
1.7	3680	793	65000	2.2				11	640	123.54	11700	1.30	YFK67	4	39
2.0	3210	696	65000	2.5				13	560	108.03	12100	1.45	YFKF67	4	45
2.2	2800	615	65000	2.8				15	465	90.04	12600	1.75	YFKA67	4	37
								18	395	76.37	12800	2.1	YFKAF67	4	42
								20	360	68.95	13000	2.3			
								23	315	60.66	13000	2.6			
								24	295	57.28	13000	2.8			

输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
0.75kW								1.1kW							
11	645	123.85	7130	0.95	YFK57	4	33	0.73	13100	1926	79100	1.00	YFKI27R77	4	480
13	560	108.29	7940	1.05	YFKF57	4	38	0.80	11900	1757	79800	1.10	YFKF127R77	4	520
15	470	90.26	8570	1.30	YFKA57	4	31	0.91	10400	1541	80500	1.25	YFKA127R77	4	450
18	395	76.56	8890	1.50	YFKAF57	4	37	1.0	9100	1342	81100	1.45	YFKAF127R77	4	490
20	360	69.12	9060	1.65				1.2	7960	1177	81500	1.65			
23	315	60.81	9230	1.90				1.4	6950	1025	81800	1.85			
24	300	57.42	9290	2.0				1.6	6080	899	82000	2.1			
28	255	48.89	9450	2.4				1.8	5270	790	82200	2.5			
31	230	44.43	9530	2.6				2.0	4740	704	82400	2.7			
								2.3	4090	610	82500	3.2			
18	390	75.20	6060	1.00	YFK47	4	28	2.5	3690	549	82500	3.5			
20	365	69.84	6410	1.10	YFKF47	4	31	2.9	3180	477	82600	4.1			
22	330	63.30	6790	1.20	YFKA47	4	29								
24	295	56.83	7110	1.35	YFKAF47	4	30	1.2	7920	1166	65000	1.00	YFKI07R77	4	320
28	255	48.95	7430	1.55				1.4	6920	1030	65000	1.15	YFKF107R77	4	330
30	240	46.03	7540	1.65				1.5	6050	904	65000	1.30	YFKA107R77	4	290
35	205	39.61	7740	1.95				1.8	5380	793	65000	1.50	YFKAF107R77	4	315
39	184	35.39	7760	2.2				2.0	4700	696	65000	1.70			
44	162	31.30	7550	2.5				2.3	4120	615	65000	1.95			
								2.7	3500	522	65000	2.3			
31	230	44.46	4170	0.85	YFK37	4	21	3.0	3080	461	65000	2.6			
36	197	37.97	4150	1.00	YFKF37	4	23	3.4	2720	408	65000	2.9			
39	185	35.57	4140	1.10	YFKA37	4	20	3.8	2450	364	65000	3.3			
46	156	29.96	4080	1.30	YFKAF37	4	22	4.4	2140	318	65000	3.7			
48	150	28.83	4080	1.35											
55	130	24.99	3990	1.55				1.9	5030	743	39900	0.85	YFK97R57	4	190
59	121	23.36	3950	1.60				2.2	4420	652	40000	0.95	YFKF97R57	4	210
68	105	20.19	3860	1.75				2.4	3910	573	40000	1.10	YFKA97R57	4	170
80	89	17.15	3750	2.0				2.8	3400	504	40000	1.25	YFKAF97R57	4	195
90	80	15.31	3670	2.2				3.2	2940	437	40000	1.45			
105	68	13.08	3550	2.4				3.7	2590	382	40000	1.65			
114	63	12.14	3500	2.5				4.1	2300	342	40000	1.85			
132	54	10.49	3380	2.9				3.0	3220	474	26600	0.85	YFK87R57	4	130
155	46	8.91	3250	3.5				3.3	2890	426	27000	0.95	YFKF87R57	4	135
173	41	7.96	3160	3.8				3.8	2520	373	27500	1.05	YFKA87R57	4	115
203	35	6.80	3030	4.2				4.2	2230	330	27800	1.20	YFKAF87R57	4	130
217	33	6.37	2980	4.4				4.8	1980	294	28100	1.35			
257	28	5.36	2840	5.0				5.6	1700	250	28300	1.60			
1.1kW								5.9	1600	236	28400	1.70			
0.15	60700	9363	171000	0.80	YFKI87R97	4	1770	7.0	1360	201	28600	2.0			
0.17	52400	8126	185900	0.95											
0.19	48300	7343	190000	1.05	YFKA187R97	4	1770	3.9	2720	176.05	40000	1.60	YFK97	8	175
0.21	44300	6747	190000	1.15				4.4	2370	153.21	40000	1.80	YFKF97	8	200
0.23	39200	5991	190000	1.30				4.8	2170	140.28	40000	2.0	YFKA97	8	160
0.26	34900	5358	190000	1.45				5.5	1910	123.93	40000	2.2	YFKAF97	8	185
0.29	31200	4817	190000	1.60											
0.32	28300	4370	190000	1.75				5.2	2010	176.05	40000	2.1	YFK97	6	165
								6.0	1750	153.21	40000	2.5	YFKF97	6	185
0.26	35000	5355	150000	0.90	YFKI67R97	4	1190	6.6	1600	140.28	40000	2.7	YFKA97	6	145
0.29	31200	4788	150000	1.05				7.4	1420	123.93	40000	3.0	YFKAF97	6	170
0.34	26800	4079	150000	1.20	YFKA167R97	4	1190								
0.41	22200	3376	150000	1.45				7.9	1320	176.05	40000	3.3	YFK97	4	165
0.51	18000	2755	150000	1.80				9.1	1150	153.21	40000	3.7	YFKF97	4	185
0.64	14600	2182	150000	2.2				10	1050	140.28	40000	4.1	YFKA97	4	145
0.82	11300	1704	150000	2.8									YFKAF97	4	170
0.99	9330	1408	150000	3.4				5.3	1990	174.19	28100	1.35	YFK87	6	105
1.1	8560	1296	150000	3.7				5.6	1880	164.34	28200	1.45	YFKF87	6	115
								6.2	1680	147.32	28300	1.60	YFKA87	6	94
0.40	22900	3516	109300	0.80	YFKI57R97	4	800	7.2	1450	126.91	28500	1.85	YFKAF87	6	110
0.46	20100	3051	111100	0.90	YFKF157R97	4	870								
0.54	16900	2610	112700	1.05	YFKA157R97	4	760	8.0	1310	174.19	28600	2.1	YFK87	4	105
0.60	15100	2322	113500	1.20	YFKAF157R97	4	820	8.5	1230	164.34	28700	2.2	YFKF87	4	115
0.84	11000	1659	115000	1.65				9.5	1110	147.32	28700	2.4	YFKA87	4	93
1.0	8970	1365	115600	2.0				11	950	126.91	28800	2.8	YFKAF87	4	105
1.1	8030	1229	115800	2.2				12	870	115.82	28800	3.1			
1.3	7150	1093	116000	2.5											
1.5	6160	942	116100	2.9				6.8	1540	135.28	15400	1.00	YFK77	6	71
1.6	5550	854	116200	3.2				7.2	1470	128.52	15900	1.05	YFKF77	6	79
								8.1	1300	113.56	17000	1.20	YFKA77	6	64
								9.5	1110	97.05	17900	1.40	YFKAF77	6	71

输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg
1.1kW								1.5kW							
10	1020	135.28	18300	1.55	YFK77	4	70	0.21	60700	6747	171100	0.80	YFK187R97	4	1770
11	960	128.52	18400	1.60	YFKF77	4	78	0.24	53700	5991	183600	0.95			
12	850	113.56	18800	1.80	YFKA77	4	63	0.26	47900	5358	190000	1.05	YFKA187R97	4	1770
14	730	97.05	19200	2.1	YFKAF77	4	70	0.29	42900	4817	190000	1.15			
16	670	88.97	19300	2.3				0.32	38900	4370	190000	1.30			
48	585	78.07	19500	2.7				0.39	33000	3609	190000	1.50			
19	555	73.99	19600	2.8				0.46	27800	3062	190000	1.80			
								0.56	22800	2519	190000	2.2			
13	810	108.03	10400	1.00	YFK67	4	44	0.62	20400	2268	190000	2.5			
14	770	102.62	10700	1.05	YFKF67	4	50								
16	675	90.04	11400	1.20	YFKA67	4	42								
18	575	76.37	12000	1.45	YFKAF67	4	47	0.35	36700	4079	150000	0.85	YFK167R97	4	1190
20	515	68.95	12300	1.60				0.42	30400	3376	150000	1.05			
23	455	60.66	12600	1.80				0.51	24700	2755	150000	1.30	YFKA167R97	4	1190
24	430	57.28	12700	1.90				0.65	19900	2182	150000	1.60			
29	365	48.77	12900	2.2				0.83	15500	1704	150000	2.1			
32	335	44.32	13000	2.5				1.0	12800	1408	150000	2.5			
36	290	38.39	13000	2.8				1.1	11800	1296	150000	2.7			
16	675	90.26	2410	0.90	YFK57	4	38	0.61	20700	2322	110700	0.85	YFK157R97	4	800
18	575	76.56	7840	1.05	YFKF57	4	43	0.85	15100	1659	113500	1.20	YFKF157R97	4	880
20	520	69.12	8280	1.15	YFKA57	4	36	1.0	12300	1365	114600	1.45	YFKA157R97	4	760
23	455	60.81	8630	1.30	YFKAF57	4	42	1.1	11100	1229	115000	1.65	YFKAF157R97	4	820
24	430	57.42	8750	1.40				1.3	9840	1093	115300	1.85			
29	365	48.89	9020	1.65				1.5	8480	942	115700	2.1			
32	335	44.43	9160	1.80				1.6	7650	854	115900	2.3			
36	290	38.49	9330	2.1				2.5	5050	567	116300	3.6			
39	270	35.70	9400	2.2				2.8	4490	504	116400	4.0			
46	2250	30.28	9540	2.6											
51	205	27.34	9510	2.9				2.6	4820	536	82300	2.7	YFK127R87	4	500
58	181	24.05	9220	3.3				3.4	3770	418	82500	3.5	YFKF127R87	4	540
62	170	22.71	9090	3.5				3.8	3330	367	82600	3.9	YFKA127R87	4	470
72	145	19.34	8720	4.0									YFKAF127R87	4	510
80	132	17.57	8510	4.2				0.80	16200	1757	73400	0.80	YFK127R77	4	480
92	114	15.22	8180	4.7				0.91	14200	1541	77500	0.90	YFKF127R77	4	520
106	99	13.25	7880	5.1				1.0	12400	1342	79500	1.05	YFKA127R77	4	450
117	90	11.92	7570	4.6				1.2	10900	1177	80300	1.20	YFKAF127R77	4	490
124	85	11.26	7450	4.9				1.4	9470	1025	80900	1.35			
146	72	9.59	7120	5.6				1.6	8300	899	81400	1.55			
161	65	8.71	6930	6.0				1.8	7210	790	81700	1.80			
186	57	7.55	6650	6.4				2.0	6480	704	81900	2.0			
213	49	6.57	6380	7.0				2.3	5590	610	82200	2.3			
								2.6	5040	549	82300	2.6			
								3.0	4360	477	82400	3.0			
								3.4	3840	418	82500	3.4			
25	425	56.83	3310	0.95	YFK47	4	33	1.4	9460	1030	65000	0.85	YFK107R77	4	320
29	365	48.95	6360	1.10	YFKF47	4	36	1.6	8280	904	65000	0.95	YFKF107R77	4	330
30	345	46.03	6610	1.15	YFKA47	4	32	1.8	7330	793	65000	1.10	YFKA107R77	4	290
35	295	39.61	7090	1.35	YFKAF47	4	35	2.0	6420	696	65000	1.25	YFKAF107R77	4	315
40	265	35.39	7090	1.50				2.3	5640	615	65000	1.40			
45	235	31.30	6960	1.70				2.7	4780	522	65000	1.65			
48	220	29.32	6890	1.80				3.1	4210	461	65000	1.90			
54	194	25.91	6730	2.1				3.5	3720	408	65000	2.2			
64	164	21.81	6510	2.4				3.9	3350	364	65000	2.4			
72	147	19.58	6360	2.7				4.4	2920	318	65000	2.7			
47	225	29.96	3420	0.90	YFK37	4	26	2.5	5320	573	39500	0.80	YFK97R57	4	190
56	188	24.99	3440	1.05	YFKF37	4	28	2.8	4650	504	40000	0.95	YFKF97R57	4	210
60	175	23.36	3440	1.10	YFKA37	4	26	3.2	4020	437	40000	1.05	YFKA97R57	4	170
69	152	20.19	3420	1.20	YFKAF37	4	27	3.7	3540	382	40000	1.20	YFKAF97R57	4	195
82	129	17.15	3370	1.40				4.1	3140	342	40000	1.35			
91	115	15.31	3330	1.50				4.6	2820	305	40000	1.50			
107	98	13.08	3260	1.70				5.5	2380	258	40000	1.80			
115	91	12.14	3220	1.75				6.1	2140	232	40000	2.0			
133	79	10.49	3140	2.0				7.1	1840	199	40000	2.3			
157	67	8.91	3040	2.4											
176	60	7.96	2970	2.6											
206	51	6.80	2870	2.9											
220	48	6.37	2830	3.0											
261	40	5.36	2720	3.5											

输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhang load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed na r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhang load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
1.5kW								1.5kW							
4.3	3040	330	26800	0.90	YFK87R57	4	130	23	620	60.81	7480	0.95	YFK57	4	40
4.8	2700	294	27300	1.00	YFKF87R57	4	140	25	585	57.42	7770	1.05	YFKF57	4	45
5.6	2310	250	27700	1.15	YFKA87R57	4	120	29	495	48.89	8430	1.20	YFKA57	4	38
6.0	2180	236	27900	1.25	YFKAF87R57	4	130	32	450	44.43	8650	1.35	YFKAF57	4	44
7.0	1860	201	28200	1.45				37	390	38.49	8920	1.55			
7.7	1690	183	28300	1.60				39	365	35.70	9040	1.65			
								47	310	30.28	9190	1.95			
4.9	2940	143.47	65000	2.7	YFK107	8	300	52	280	27.34	9010	2.2			
5.8	2490	121.46	65000	3.2	YFKF107	8	310	59	245	24.05	8780	2.5			
6.2	2300	112.41	65000	3.5	YFKA107	8	270	62	230	22.71	8670	2.6			
					YFKAF107	8	295	73	196	19.34	8360	2.9			
4.6	3140	153.21	40000	1.35	YFK97	8	185	36	400	39.61	5890	1.00	YFK47	4	35
5.0	2870	140.28	40000	1.50	YFKF97	8	205	40	360	35.39	6360	1.10	YFKF47	4	38
5.7	2540	123.93	40000	1.70	YFKA97	8	165	45	320	31.30	6310	1.25	YFKA47	4	34
					YFKAF97	8	190	48	300	29.32	6270	1.35	YFKAF47	4	37
5.2	2740	176.05	40000	1.55	YFK97	6	175	54	265	25.91	6190	1.50			
6.0	2390	153.21	40000	1.80	YFKF97	6	195	65	220	21.81	6050	1.80			
6.6	2180	140.28	40000	1.95	YFKA97	6	155	72	199	19.58	5950	2.0			
7.4	1930	123.93	40000	2.2	YFKAF97	6	180	84	171	16.86	5800	2.2			
								89	161	15.86	5730	2.4			
8.0	1790	176.05	40000	2.4	YFK97	4	165	103	139	13.65	5560	2.6			
9.2	1560	153.21	40000	2.8	YFKF97	4	185	116	124	12.19	5430	2.8			
10	1430	140.28	40000	3.0	YFKA97	4	145	120	120	11.77	5340	2.3			
11	1260	123.93	40000	3.4	YFKAF97	4	170								
								60	235	23.36	2860	0.80	YFK37	4	27
6.2	2290	147.32	27800	1.20	YFK87	6	115	70	205	20.19	2920	0.90	YFKF37	4	29
7.2	1980	126.91	28100	1.35	YFKF87	6	125	82	174	17.15	2940	1.05	YFKA37	4	27
7.9	1800	115.82	28200	1.50	YFKA87	6	100	92	156	15.31	2950	1.10	YFKAF37	4	29
9.0	1600	102.71	28400	1.70	YFKAF87	6	115	108	133	13.08	2930	1.25			
								116	123	12.14	2920	1.30			
								134	107	10.49	2880	1.50			
8.1	1770	174.19	28300	1.55	YFK87	4	105	158	91	8.91	2820	1.75			
8.6	1670	164.34	28300	1.60	YFKF87	4	115	177	81	7.96	2770	1.90			
9.6	1500	147.32	28500	1.80	YFKA87	4	94	207	69	6.80	2700	2.2			
11	1290	126.91	28600	2.1	YFKAF87	4	110	221	65	6.37	2670	2.2			
12	1180	115.82	28700	2.3				263	55	5.96	2580	2.6			
14	1040	102.71	28800	2.6				2.2kW							
16	880	86.34	28800	3.1				0.32	57900	4370	176200	0.85	YFK187R97	4	1780
								0.39	48800	3609	190000	1.00			
8.1	1770	113.56	13600	0.90	YFK77	6	78	0.46	41300	3062	190000	1.20	YFKA187R97	4	1780
9.5	1510	97.05	15700	1.05	YFKF77	6	86	0.50	37000	2818	190000	1.35			
10	1390	88.97	16400	1.10	YFKA77	6	71	0.56	33800	2519	190000	1.50			
12	1220	78.07	17400	1.30	YFKAF77	6	78	0.62	30400	2268	190000	1.65			
								0.69	27400	2054	190000	1.80			
								0.77	24200	1821	190000	2.1			
10	1370	135.28	16500	1.15	YFK77	4	71	0.88	21400	1605	190000	2.3			
11	1310	128.52	16900	1.20	YFKF77	4	79								
12	1150	113.56	17700	1.35	YFKA77	4	64	0.51	36600	2755	150000	0.85	YFK167R97	4	1200
15	990	97.05	18400	1.55	YFKAF77	4	71	0.62	29800	2263	150000	1.05	YFKA167R97	4	1200
16	900	88.97	18700	1.70											
								0.65	29500	2182	150000	1.10	YFK167R97	4	1200
18	795	78.07	19000	1.95	YFK77	4	71	0.83	22900	1704	150000	1.40			
19	750	73.99	19100	2.1	YFKF77	4	79	1.0	19000	1408	150000	1.70	YFKA167R97	4	1200
22	660	64.75	19400	2.4	YFKA77	4	64	1.1	17400	1296	150000	1.85			
24	595	58.34	19500	2.6	YFKAF77	4	71	1.3	14700	1101	150000	2.2			
28	520	51.18	19700	3.0				1.5	12600	944	150000	2.5			
31	460	45.16	19800	3.4											
35	405	40.04	19800	3.8				0.85	22400	1659	109700	0.80	YFK157R97	4	800
								1.0	18300	1365	112000	1.00	YFKF157R97	4	880
16	910	90.04	9370	0.90	YFK67	4	46	1.1	16500	1229	112900	1.10	YFKA157R97	4	760
18	775	76.37	10700	1.05	YFKF67	4	52	1.3	14600	1093	113700	1.25	YFKAF157R97	4	820
20	700	68.95	11300	1.15	YFKA67	4	44	1.5	12600	942	114500	1.45			
23	615	60.66	11800	1.35	YFKAF67	4	49	1.6	11400	854	114900	1.60			
25	580	57.28	12000	1.40				1.9	9990	756	115300	1.80			
29	495	48.77	12400	1.65											
32	450	44.32	12600	1.80				2.6	7180	536	81700	1.80	YFK127R87	4	510
37	390	38.39	12800	2.0				3.0	6310	473	82000	2.1	YFKF127R87	4	550
40	360	35.62	12900	2.3				3.4	5600	418	82200	2.3	YFKA127R87	4	480
47	305	30.22	13000	2.7				3.8	4950	367	82300	2.6	YFKAF127R87	4	520
52	275	27.28	13000	3.0				4.3	4440	330	82400	2.9			
59	245	24.00	13000	3.3											

输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg
2.2kW								2.2kW							
1.4	14000	1025	78000	0.95	YFKI27R77	4	485	47	450	30.22	12600	1.80	YFK67	4	53
1.6	12200	899	79600	1.05	YFKF27R77	4	530	52	405	27.28	12800	2.0	YFKF67	4	59
1.8	10700	790	80400	1.20	YFKA127R77	4	460	59	360	24.00	13000	2.2	YFKA67	4	51
2.0	9580	704	80900	1.35	YFKA127R77	4	495	62	340	22.66	13000	2.3	YFKA167	4	56
2.3	8280	610	81400	1.55				73	285	19.30	13000	2.6			
2.6	7460	549	81600	1.75				80	260	17.54	13000	2.8			
3.0	6460	477	81900	2.0				93	225	15.19	13000	3.1			
3.4	5680	418	82100	2.3				107	197	13.22	13000	3.4			
								113	186	12.48	13000	2.8			
								133	158	10.63	13000	3.2			
2.3	8340	615	65000	0.95	YFKI07R77	4	325	146	144	9.66	13000	3.3			
2.7	7070	522	65000	1.15	YFKF07R77	4	340	169	125	8.37	13000	3.5			
3.1	6230	461	65000	1.30	YFKA107R77	4	300	194	109	7.28	12700	3.9			
3.5	5520	408	65000	1.45	YFKA107R77	4	325								
3.9	4940	364	65000	1.60				32	660	44.43	5100	0.90	YFK37	4	47
4.4	4320	318	65000	1.85				37	575	38.49	7850	1.05	YFKF37	4	52
4.9	3890	286	65000	2.1				39	530	35.70	8180	1.15	YFKA37	4	45
5.6	3410	251	65000	2.3				47	450	30.28	8250	1.35	YFKA157	4	51
								52	405	27.34	8160	1.45			
3.7	5210	382	39700	0.80	YFK97R57	4	195	59	360	24.05	8030	1.65			
4.1	4640	342	40000	0.95	YFKF97R57	4	220	62	340	22.71	7970	1.75			
4.6	4170	305	40000	1.05	YFKA97R57	4	180	73	290	19.34	7760	2.0			
5.5	3510	258	40000	1.20	YFKA97R57	4	205	80	260	17.57	7630	2.1			
6.1	3160	232	40000	1.35				93	225	15.22	7430	2.4			
7.1	2710	199	40000	1.60				106	197	13.25	7220	2.6			
								118	178	11.92	6890	2.3			
								125	168	11.26	6810	2.5			
4.9	4310	143.47	65000	1.85	YFK107	8	305								
5.8	3650	121.46	65000	2.2	YFKF107	8	315	54	385	25.91	5260	1.05	YFK47	4	42
6.2	3370	112.41	65000	2.4	YFKA107	8	275	65	325	21.81	5260	1.25	YFKF47	4	45
6.9	3020	100.75	65000	2.7	YFKA107	8	300	72	290	19.58	5240	1.35	YFKA47	4	41
													YFKA147	4	44
6.1	3420	153.21	40000	1.25	YFK97	6	185	84	250	16.86	5190	1.50			
6.7	3140	140.28	40000	1.35	YFKF97	6	205	89	235	15.86	5160	1.60			
7.6	2770	123.93	40000	1.55	YFKA97	6	165	103	205	13.65	5070	1.75			
8.9	2350	105.13	40000	1.85	YFKA97	6	190	116	182	12.19	4990	1.95			
								120	175	11.77	4890	1.60			
8.0	2620	176.05	40000	1.65	YFK97	4	175	133	157	10.56	4810	1.80			
9.2	2280	153.21	40000	1.90	YFKF97	4	195	155	136	9.10	4690	2.1			
10	2090	140.28	40000	2.1	YFKA97	4	155								
11	1850	123.93	40000	2.3	YFKA97	4	180	108	195	13.08	2370	0.85	YFK37		33
13	1570	105.13	40000	2.8				134	156	10.49	2430	1.00	YFKF37		36
15	1440	96.80	40000	3.0				158	133	8.91	2440	1.20	YFKA37		33
								177	119	7.96	2430	1.30	YFKA37		35
9.6	2200	147.32	27900	1.25	YFK87	4	115	207	101	6.80	2410	1.50			
11	1890	126.91	28200	1.45	YFKF87	4	125	221	95	6.37	2400	1.55			
12	1730	115.82	28300	1.55	YFKA87	4	100	263	80	5.36	2350	1.75			
14	1530	102.71	28500	1.75	YFKA187	4	115	3kW							
16	1290	86.34	28600	2.1				0.50	51300	2818	187700	0.95	YFK187R97	4	1780
18	1180	79.34	28700	2.3									YFKA187R97	4	1780
20	1050	70.46	28800	2.6											
22	940	63.00	28800	2.9				0.46	57100	3062	177600	0.90	YFK187R97	4	1780
								0.56	46800	2519	190000	1.05			
12	1690	113.56	14300	0.90	YFK77	4	78	0.62	42100	2268	190000	1.20	YFKA187R97	4	1780
15	1450	97.05	16100	1.05	YFKF77	4	86	0.68	38000	2054	190000	1.30			
16	1330	88.97	16800	1.15	YFKA77	4	71	0.77	33600	1821	190000	1.50			
18	1160	78.07	17600	1.35	YFKA177	4	78	0.87	29700	1605	190000	1.70			
19	1100	73.99	17900	1.40				1.0	25600	1395	190000	1.95			
22	960	64.75	18400	1.60				1.2	22100	1196	190000	2.3			
24	870	58.34	18800	1.80											
28	765	51.18	19100	2.0				0.82	31700	1704	150000	1.00	YFK167R97	4	1200
31	675	45.16	19300	2.3				0.90	26200	1408	150000	1.20			
35	595	40.04	19500	2.6				1.1	24100	1296	150000	1.35	YFKA167R97	4	1200
40	525	35.20	19700	3.0				1.3	20300	1101	150000	1.55			
46	460	30.89	19800	3.4				1.5	17500	944	150000	1.85			
48	435	29.27	19800	3.6				1.7	15500	843	150000	2.1			
55	380	25.62	19900	4.1				1.9	14000	757	150000	2.3			
23	900	60.66	9490	0.90	YFK67	4	53	1.1	22800	1229	109400	0.80	YFK157R97	4	810
25	850	57.28	10000	0.95	YFKF67	4	59	1.3	20300	1093	111000	0.90	YFKF157R97	4	880
29	725	48.77	11100	1.15	YFKA67	4	51	1.5	17500	942	112400	1.05	YFKA157R97	4	770
32	660	44.32	11500	1.25	YFKA167	4	56	1.6	15800	854	113200	1.15	YFKA157R97	4	830
37	570	38.39	12100	1.40				1.9	13900	756	114000	1.30			
40	530	35.62	12300	1.55				2.5	10500	567	115200	1.70			
								2.8	9310	504	115500	1.95			

输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg
3kW								3kW							
2.6	9940	536	80700	1.30	YFKI27R87	4	510	16	1820	88.97	13100	0.85	YFK77	4	82
3.0	8750	473	81200	1.50	YFKF127R87	4	550	18	1600	78.07	15000	0.95	YFKF77	4	90
3.3	7760	418	81500	1.70	YFKA127R87	4	485	19	1510	73.99	15600	1.00	YFKA77	4	75
3.8	6840	367	81800	1.90	YFKA127R87	4	520	22	1330	64.75	16800	1.15	YFKA177	4	82
4.2	6140	330	82000	2.1				24	1190	58.34	17500	1.30			
4.9	5300	287	82200	2.5				27	1050	51.18	18100	1.50			
								31	920	45.16	18600	1.70			
1.8	14800	790	76500	0.90	YFKI27R77	4	490	35	820	40.04	18900	1.90			
2.0	13200	704	79100	1.00	YFKF127R77	4	530	40	720	35.20	19200	2.2			
2.3	11400	610	80000	1.15	YFKA127R77	4	465	45	630	30.89	19400	2.5			
2.5	10300	549	80600	1.25	YFKA127R77	4	500								
2.9	8920	477	81100	1.45				32	910	44.32	9450	0.90	YFK67	4	57
3.3	7840	418	81500	1.65				36	785	38.39	10600	1.00	YFKF67	4	63
								39	730	35.62	11100	1.15	YFKA67	4	55
3.0	8610	461	65000	0.95	YFKI07R77	4	330	46	620	30.22	11800	1.35	YFKA167	4	60
3.4	7620	408	65000	1.05	YFKF07R77	4	340	51	560	27.28	12100	1.45			
3.8	6820	364	65000	1.15	YFKA07R77	4	305	58	490	24.00	12500	1.65			
4.4	5960	318	65000	1.35	YFKA107R77	4	325	62	465	22.66	12600	1.70			
4.9	5370	286	65000	1.50				73	395	19.30	12800	1.95			
5.6	4700	251	65000	1.70				80	360	17.54	13000	2.1			
6.3	4150	222	65000	1.95				92	310	15.19	13000	2.2			
7.1	3670	196	65000	2.2				106	270	13.22	13000	2.5			
8.1	3250	174	65000	2.2				112	255	12.48	13000	2.1			
9.1	2880	154	65000	2.5				132	220	10.63	13000	2.3			
10	2610	140	65000	2.8				145	198	9.66	13000	2.4			
5.4	4840	258	40000	0.90	YFK97R57	4	200	40	620	30.28	7180	0.95	YFK57	4	51
6.0	4360	232	40000	1.00	YFKF97R57	4	220	51	560	27.34	7190	1.05	YFKF57	4	56
7.0	3740	199	40000	1.15	YFKA97R57	4	185	58	490	24.05	7180	1.20	YFKA57	4	49
								62	465	22.71	7160	1.30	YFKA157	4	55
5.0	5710	143.47	65000	1.40	YFKI07	8	325	72	395	19.34	7080	1.45			
5.9	4830	121.46	65000	1.65	YFKF07	8	335	80	360	17.57	7020	1.55			
6.4	4470	112.41	65000	1.80	YFKA07	8	295	92	310	15.22	6890	1.70			
7.2	4010	100.75	65000	2.0	YFKA107	8	320	106	270	13.25	6750	1.90			
7.9	3620	90.96	65000	2.2				117	245	11.92	6420	1.70			
								124	230	11.26	6370	1.80			
6.6	4370	143.47	65000	1.85	YFKI07	6	305	146	196	9.59	6200	2.1			
7.7	3700	121.46	65000	2.2	YFKF07	6	315	161	178	8.71	6090	2.2			
8.4	3430	112.41	65000	2.3	YFKA07	6	275	186	154	7.55	5920	2.4			
9.3	3070	100.75	65000	2.6	YFKA107	6	300	213	134	6.57	5750	2.6			
9.8	2940	143.47	65000	2.7	YFKI07	4	295	72	400	19.58	4430	1.00	YFK47	4	46
12	2490	121.46	65000	3.2	YFKF07	4	305	83	345	16.86	4490	1.10	YFKF47	4	49
								88	325	15.86	4500	1.15	YFKA47	4	45
													YFKA147	4	48
7.6	3780	123.93	40000	1.15	YFKI07	4	265	103	280	13.65	4510	1.30	YFK47	4	46
8.9	3200	105.13	40000	1.35	YFKF07	6	190	115	250	12.19	4490	1.40	YFKF47	4	49
9.7	2950	96.80	40000	1.45	YFKA07	6	210	119	240	11.77	4370	1.15	YFKA47	4	45
11	2640	86.52	40000	1.65	YFKA97	6	170	133	215	10.56	4350	1.30	YFKA17	4	48
								154	186	9.10	4290	1.50			
7.9	3600	176.05	40000	1.20	YFK97	4	175	164	175	8.56	4270	1.55			
9.1	3140	153.21	40000	1.35	YFKF97	4	200	190	151	7.36	4190	1.65			
10	2870	140.28	40000	1.50	YFKA97	4	160	213	135	6.58	4120	1.80			
11	2540	123.93	40000	1.70	YFKA197	4	185	241	119	5.81	4030	1.95			
13	2150	105.13	40000	2.0											
14	1980	96.80	40000	2.2				157	182	8.91	2000	0.90	YFK37	4	37
16	1770	86.52	40000	2.4				176	163	7.96	2040	0.95	YFKF37	4	40
18	1590	77.89	40000	2.7				206	139	6.80	2080	1.10	YFKA37	4	37
20	1440	70.54	40000	3.0				220	130	6.37	2080	1.10	YFKA137	4	39
22	1280	62.55	40000	3.4				261	110	5.36	2090	1.30			
25	1160	56.55	40000	3.7											
9.5	3010	147.32	26900	0.90	YFK87	4	120	1.7	20300	835	190000	2.5	YFK187R107	4	1830
11	2600	126.91	27400	1.05	YFKF87	4	130	2.7	12600	520	190000	4.0	YFKA187R107	4	1830
12	2370	115.82	27700	1.15	YFKA87	4	105								
14	2100	102.71	28000	1.30	YFKA187	4	120	0.56	61900	2519	168800	0.80	YFK187R97	4	1790
16	1770	86.34	28300	1.55				0.63	55600	2268	180200	0.90			
18	1620	79.34	28400	1.65				0.69	50300	2054	189400	1.00	YFKA187R97	4	1790
20	1440	70.46	28500	1.85				0.78	44500	1821	190000	1.10			
22	1290	63.00	28600	2.1				0.88	39300	1605	190000	1.25			
25	1160	56.64	28700	2.3				1.0	34000	1395	190000	1.45			
28	1010	49.16	28800	2.7				1.2	29200	1196	190000	1.70			
32	900	44.02	28800	2.9				1.4	25600	1046	190000	1.95			
38	745	36.52	28400	3.3				1.5	23100	945	190000	2.2			

输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg
4kW								4kW							
1.0	34600	1408	150000	0.90	YFK167R97	4	1210	12	3120	115.82	26700	0.85	YFK87	4	125
1.1	31900	1296	150000	1.00				14	2760	102.71	27200	1.00	YFK187	4	135
1.3	26900	1101	150000	1.20	YFKA167R97	4	1210	16	2320	86.34	27700	1.15	YFKA87	4	110
1.5	23100	944	150000	1.40				18	2130	79.34	27900	1.25	YFKAF87	4	125
1.7	20500	843	150000	1.55				20	1900	70.46	28200	1.40			
1.9	18500	757	150000	1.75				23	1690	63.00	28300	1.60			
2.2	15400	632	150000	2.1				25	1520	56.64	28500	1.75			
1.7	20900	854	110600	0.85	YFK157R97	4	810	29	1320	49.16	28600	2.0			
1.9	18400	756	112000	1.00	YFKF157R97	4	890	32	1180	44.02	28300	2.2			
2.5	13800	567	114000	1.30	YFKA157R97	4	780	39	980	36.52	27300	2.5			
2.8	12300	504	114600	1.45	YFKAF157R97	4	830								
3.3	10600	434	115100	1.70				22	1740	64.75	13900	0.90	YFK77	4	88
2.7	13100	536	79100	1.00	YFK127R87	4	520	24	1570	58.34	15200	1.00	YFKF77	4	96
3.0	11600	473	79900	1.10	YFKF127R87	4	560	28	1380	51.18	16500	1.15	YFKA77	4	81
3.4	10300	418	80600	1.25	YFKA127R87	4	490	31	1210	45.16	17400	1.30	YFKAF77	4	88
3.9	9040	367	81100	1.45	YFKAF127R87	4	530	35	1080	40.04	18000	1.45			
4.3	8120	330	81400	1.60				37	1030	38.39	18200	1.45			
5.0	7010	287	81800	1.85				40	950	35.20	18500	1.65			
5.6	6200	253	82000	2.1				46	830	30.89	18900	1.85			
2.3	15100	610	75800	0.85	YFK127R77	4	495	49	785	29.27	19000	1.95			
2.6	13600	549	78800	0.95	YFKF127R77	4	540	55	690	25.62	19300	2.2			
3.0	11800	477	79800	1.10	YFKA127R77	4	470	62	620	23.08	19500	2.5			
3.4	10300	418	80500	1.25	YFKAF127R77	4	510	70	545	20.25	19600	2.8			
3.9	8990	364	650000	0.90	YFKM7R77	4	335	47	810	30.22	10400	1.00	YFK67	4	64
4.5	7860	318	650000	1.00	YFKF107R77	4	350	52	735	27.28	11000	1.10	YFKF67	4	70
5.0	7080	286	650000	1.15	YFKA107R77	4	310	59	645	24.00	11600	1.25	YFKA67	4	62
5.7	6200	251	650000	1.30	YFKAF107R77	4	335	63	610	22.66	11800	1.30	YFKAF67	4	67
6.4	5470	222	650000	1.45				74	520	19.30	12300	1.45			
7.2	4840	196	650000	1.65				81	470	17.54	12500	1.55			
8.2	4290	174	650000	1.70				94	410	15.19	12800	1.70			
9.2	3800	154	650000	1.90				107	355	13.22	13000	1.90			
10	3440	140	650000	2.1				114	335	12.48	13000	1.60			
7.1	4930	199	40000	0.85	YFK97R57	4	210	134	285	10.63	13000	1.75			
					YFKF97R57	4	230	147	260	9.66	12900	1.85			
					YFKA97R57	4	190	170	225	8.37	12500	1.95			
					YFKAF97R57	4	215	195	196	7.28	12100	2.1			
5.3	7220	136.14	81700	1.80	YFK127	8	490	59	645	24.05	6120	0.95	YFK57	4	58
5.9	6500	122.48	81900	2.0	YFKF127	8	530	63	610	22.71	6160	1.00	YFKF57	4	63
6.5	5850	110.18	82100	2.2	YFKA127	8	460	73	520	19.34	6220	1.10	YFKA57	4	56
					YFKAF127	8	500	81	475	17.57	6230	1.15	YFKAF57	4	62
6.6	5810	146.07	82100	2.2	YFK127	6	480	93	410	15.22	6210	1.30			
7.1	5420	136.14	82200	2.4	YFKF127	6	520	107	355	13.25	6150	1.45			
7.8	4870	122.48	82300	2.7	YFKA127	6	450	119	320	11.92	5810	1.30			
8.7	4380	110.18	82400	3.0	YFKAF127	6	490	126	305	11.26	5790	1.35			
6.4	5960	112.41	65000	1.35	YFKM07	8	335	148	260	9.59	5700	1.55			
7.2	5340	100.75	65000	1.50	YFKF07	8	345	163	235	8.71	5640	1.65			
7.9	4830	90.96	65000	1.65	YFKA07	8	305	188	205	7.55	5530	1.80			
8.7	4380	82.61	65000	1.85	YFKAF07	8	330	216	177	6.57	5400	1.95			
6.7	5710	143.47	65000	1.40	YFKM07	6	325								
7.9	4830	121.46	65000	1.65	YFKF07	6	335	0.79	61100	1821	170200	0.80	YFK187R97	4	1790
8.5	4470	112.41	65000	1.80	YFKA07	6	295	0.89	53900	1605	183200	0.95			
9.5	4010	100.75	65000	2.0	YFKAF07	6	320	1.0	46700	1395	190000	1.05	YFKA187R97	4	1790
11	3620	90.96	65000	2.2				1.2	40100	1196	190000	1.25			
9.9	3860	143.47	65000	2.1	YFKM07	4	300	1.4	35100	1046	190000	1.45			
12	3270	121.46	65000	2.5	YFKF07	4	310	1.5	31700	945	190000	1.60			
13	3020	112.41	65000	2.7	YFKA07	4	270	1.9	24800	738	190000	2.0			
14	2710	100.75	65000	3.0	YFKAF07	4	295	2.3	20800	621	190000	2.4			
16	2450	90.96	65000	3.3				1.3	36900	1101	150000	0.85	YFK167R97	4	1210
17	2220	82.61	65000	3.6				1.5	31700	944	150000	1.00			
19	1970	73.30	65000	4.1				1.7	28200	843	150000	1.15	YFKA167R97	4	1210
9.3	4120	153.21	40000	1.05	YFK97	4	185	1.9	25400	757	150000	1.25			
10	3770	140.28	40000	1.15	YFKF97	4	205	2.3	21200	632	150000	1.50			
11	3330	123.93	40000	1.30	YFKA97	4	165	2.5	18700	561	150000	1.70			
14	2830	105.13	40000	1.50	YFKAF97	4	190	3.0	16100	481	150000	2.0			
15	2600	96.80	40000	1.65				3.4	14100	423	150000	2.3			
16	2330	86.52	40000	1.85											
18	2100	77.89	40000	2.0											
20	1900	70.54	40000	2.3											

输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outpu side Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outpu side Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
5.5kW								5.5kW							
2.2	22100	661	109900	0.80	YFKI57R97	4	820	32	1660	45.16	14600	0.95	YFK77	4	95
2.5	19000	567	111700	0.95	YFKF157R97	4	900	36	1470	40.04	15900	1.05	YFKI77	4	105
2.8	16900	504	112700	1.05	YFKAI57R97	4	780	46	1130	30.89	17800	1.35	YFKAF77	4	88
3.3	14500	434	113800	1.25	YFKAF157R97	4	840	49	1070	29.27	18000	1.45	YFKAF77	4	95
3.8	12700	379	114500	1.40				56	940	25.62	18500	1.65			
4.3	11100	333	115000	1.60				62	850	23.08	18800	1.85			
3.4	14100	418	77800	0.90	YFKI27R87	4	520	71	745	20.25	19100	2.0			
3.9	12400	367	79500	1.05	YFKF127R87	4	570	80	655	17.87	19400	2.2			
4.3	11100	330	80200	1.15	YFKAI27R87	4	490	90	580	15.84	19200	2.4			
5.0	9620	287	80800	1.35	YFKAF127R87	4	530	106	495	13.52	18600	2.7			
5.6	8510	253	81300	1.55				116	455	12.36	17900	2.2			
6.7	7150	213	81700	1.80				132	400	10.84	17400	2.5			
7.1	6740	200	81900	1.80											
8.6	5580	166	82200	2.2											
9.8	4920	147	82300	2.4											
6.4	7490	222	65000	1.05	YFKI07R77	4	345	60	880	24.00	9720	0.90	YFK67	4	69
7.3	6640	196	65000	1.20	YFKF07R77	4	355	63	830	22.66	10200	0.95	YFKF67	4	75
8.2	5870	174	65000	1.25	YFKAI07R77	4	315	74	710	19.30	11200	1.05	YFKAF67	4	67
9.3	5200	154	65000	1.40	YFKAF07R77	4	340	82	645	17.54	11600	1.15	YFKAF67	4	72
10	4720	140	65000	1.55				94	560	15.19	12100	1.25			
4.7	11100	150.41	115000	1.60	YFKI57	8	730	108	485	13.22	12500	1.40			
5.8	9050	122.39	115500	2.0	YFKF57	8	810	115	460	12.48	12600	1.15			
7.1	7410	100.22	115900	2.4	YFKAI57	8	700	135	390	10.63	12400	1.30			
7.8	6780	91.65	116000	2.7	YFKAF57	8	760	148	355	9.66	12200	1.35			
								171	305	8.37	11900	1.45			
								196	265	7.28	11600	1.55			
5.2	10100	136.14	80700	1.30	YFKI27	8	495	81	645	17.57	5080	0.85	YFK57	4	63
5.8	9060	122.48	81100	1.45	YFKF27	8	540	94	560	15.22	5210	0.95	YFKF57	4	68
6.4	8150	110.18	81400	1.60	YFKAI27	8	465	108	485	13.25	5280	0.95	YFKAF57	4	61
7.9	6650	89.89	81900	1.95	YFKAF127	8	500	120	440	11.92	4920	1.00	YFKAF57	4	67
7.1	7450	136.14	81600	1.75	YFKI27	6	490	127	415	11.26	4950	1.05			
7.8	6700	122.48	81900	1.95	YFDI27	6	530	149	350	9.59	4990	1.15			
8.7	6030	110.18	82100	2.2	YFDI27	6	460	164	320	8.71	4990	1.20			
11	4920	89.89	82300	2.6	YFKAF127	6	500	190	275	7.55	4960	1.30			
8.5	6150	112.41	65000	1.30	YFKI07	6	335	218	240	6.57	4910	1.45			
9.5	5510	100.75	65000	1.45	YFKF07	6	345								
10	5270	143.47	65000	1.50	YFKAI07	6	305	7.5kW	38200	835	190000	1.30	YFKI87R107	4	1860
11	4980	90.96	65000	1.60	YFKAF07	6	330	2.0	33300	729	190000	1.50			
12	4520	82.61	65000	1.75				2.3	28400	622	190000	1.75	YFKAI87R107	4	1860
13	4130	112.41	65000	1.95	YFKI07	4	305	1.2	55000	1196	181400	0.90	YFKI87R97	4	1810
14	3700	100.75	65000	2.2	YFKF07	4	315	1.4	48000	1064	190000	1.05			
16	3340	90.96	65000	2.4	YFKAI07	4	375	1.5	43400	945	190000	1.15	YFKAI87R97	4	1810
17	3030	82.61	65000	2.6	YFKAF07	4	300	1.9	33900	738	190000	1.45			
12	4550	123.93	40000	0.95	YFK97	4	190	2.3	28500	621	190000	1.75			
14	3860	105.13	40000	1.10	YFKF97	4	210	2.7	24100	527	190000	2.1			
15	3560	96.80	40000	1.20	YFKAF97	4	170								
17	3180	86.52	40000	1.35	YFKAF97	4	195	1.7	38700	843	150000	0.85	YFKI67R97	4	1230
18	2860	77.89	40000	1.50				1.9	34700	757	150000	0.90			
20	2590	70.54	40000	1.65				2.3	29000	632	150000	1.10	YFKAI67R97	4	1230
23	2300	62.55	40000	1.85				2.5	25700	651	150000	1.25			
25	2080	56.55	39700	2.1				3.0	22100	481	150000	1.45			
30	1760	47.93	38600	2.4				3.4	19400	423	150000	1.65			
17	3170	86.34	26600	0.85	YFK87	4	130	3.9	16900	369	150000	1.90			
18	2910	79.34	27000	0.95	YFKF87	4	140								
20	2590	70.46	27400	1.05	YFKAI87	4	115	3.3	19900	434	111200	0.90	YFKI57R97	4	840
23	2310	63.00	27500	1.15	YFKAF87	4	130	3.8	17400	379	112500	1.05	YFKF157R97	4	920
25	2080	56.64	27300	1.30				4.3	15300	333	113500	1.20	YFKAI57R97	4	800
29	1810	49.16	26900	1.50				4.9	13300	291	114200	1.35	YFKAF157R97	4	860
32	1620	44.02	26500	1.60											
39	1340	36.52	25800	1.85				4.3	15200	330	75500	0.85	YFKI27R87	4	550
46	1150	31.39	25200	2.3				5.0	13200	287	79100	1.00	YFKF127R87	4	590
51	1020	27.88	24700	2.5				5.6	11600	253	79900	1.10	YFKAI27R87	4	520
								6.7	9790	213	80800	1.35	YFKAF127R87	4	550
								7.1	9220	200	81000	1.30			
								8.6	7640	166	81600	1.55			
								9.8	6740	147	81900	1.80			

输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque M _a N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor f _b	机型号 Type	极数 Pole	重量 weight kg
7.5kW								7.5kW							
4.4	16400	164.50	150000	1.95	YFK167	8	1160	25	2830	56.55	37100	1.50	YFK97	4	210
5.3	13400	134.99	150000	2.4	YFKA167	8	1160	30	2400	47.93	36400	1.80	YFKF97	4	230
								34	2100	41.87	35600	2.0	YFKA97	4	190
								37	1920	39.30	35100	2.2	YFKAF97	4	215
5.8	12300	164.50	150000	2.6	YFK167	6	1130	42	1710	34.23	34400	2.5			
7.1	10100	134.99	150000	3.2	YFKA167	6	1130	23	3160	63.00	24100	0.85	YFK87	4	150
								25	2840	56.64	24200	0.95	YFKF87	4	160
								29	2460	49.16	24200	1.10	YFKA87	4	140
6.4	11200	150.41	114900	1.60	YFK157	6	730	32	2200	44.02	24200	1.20	YFKAF87	4	155
7.8	9130	122.39	115500	1.95	YFKF157	6	810	39	1830	36.52	23900	1.35			
9.6	7480	100.22	115900	2.4	YFKA157	6	700	46	1570	31.39	23500	1.70			
10	6840	91.65	116000	2.6	YFKAF157	6	760	51	1400	27.88	23200	1.85			
12	5950	79.75	116200	3.0				57	1250	24.92	22800	2.0			
								64	1120	22.41	22500	2.0			
7.1	10200	136.14	80600	1.30	YFK127	6	495	74	970	19.45	21900	2.4			
7.8	9140	122.48	81000	1.40	YFKF127	6	540	82	870	17.42	21500	2.5			
8.7	8220	110.18	81400	1.60	YFKA127	6	465	89	800	16.00	20600	2.2			
11	6710	89.89	81900	1.95	YFKAF127	6	500	99	725	14.45	20700	2.9			
								46	1550	30.89	15400	1.00	YFK77	4	115
9.8	7320	146.07	81700	1.80	YFK127	4	480	49	1470	29.27	16000	1.05	YFKF77	4	125
11	6820	136.14	81800	1.90	YFKF127	4	520	56	1280	25.62	17000	1.20	YFKA77	4	110
12	6130	122.48	82000	2.1	YFKA127	4	450	62	1160	23.08	17700	1.35	YFKAF77	4	115
13	5520	110.18	82200	2.4	YFKAF127	4	490	71	1010	20.25	18300	1.50			
16	4500	89.89	82400	2.9				80	890	17.87	18600	1.60			
17	4110	81.98	82500	3.2				90	795	15.81	18200	1.60			
20	3550	70.95	82600	3.7				106	675	13.52	17800	1.75			
								116	620	12.36	17000	1.80			
								132	545	10.84	16700	1.90			
10	7190	143.47	65000	1.10	YFK107	4	325	150	480	9.56	16300	2.0			
12	6080	121.46	65000	1.30	YFKF107	4	335	169	425	8.48	15900	2.1			
13	5630	112.41	65000	1.40	YFKA107	4	295	198	365	7.24	15400	2.3			
14	5050	100.75	65000	1.60	YFKAF107	4	320								
16	4560	90.96	64200	1.75				11kW							
17	4140	82.61	63200	1.95				1.7	55900	835	179700	0.90	YFK187R107	4	1870
20	3670	73.30	61900	2.2				2.0	48800	729	190000	1.05			
22	3330	66.52	60900	2.4				2.3	41600	622	190000	1.20	YFKA187R107	4	1870
25	2860	57.17	59100	2.8				2.8	34800	520	190000	1.45			
29	2500	49.90	57500	3.1				3.2	30400	454	190000	1.65			
34	2120	42.33	55500	3.5				4.1	23800	335	190000	2.1			
39	1850	37.00	53800	3.9											
								2.0	49600	738	190000	1.00	YFK187R97	4	1830
								2.3	41700	621	190000	1.20			
								2.7	35300	527	190000	1.40	YFKA187R97	4	1830
15	4850	96.80	38300	0.90	YFK97	4	210	4.5	21300	318	150000	1.50	YFK167R107	4	1290
17	4330	86.52	38300	1.00	YFKF97	4	230	5.2	18600	278	150000	1.70			
18	3900	77.89	38100	1.10	YFKA97	4	190	5.9	16300	244	150000	1.95	YFKA167R107	4	1290
20	3530	70.54	37900	1.20	YFKAF97	4	215	6.8	14200	213	150000	2.2			
23	3130	62.55	37500	1.35				7.0	13700	206	150000	2.3			

输出转速 output speed n _a r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n _a r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside F _a N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
11kW								11kW							
2.6	37500	561	150000	0.85	YFKI67R97	4	1250	33	3210	44.02	20000	0.80	YFK87	4	165
3.0	32300	481	150000	1.00				39	2660	36.52	20400	0.95	YFKF87	4	175
3.4	28300	423	150000	1.15	YFKAI67R97	4	1250	46	2290	31.39	20600	1.20	YFKA87	4	150
3.9	24700	369	150000	1.30				52	2030	27.88	20600	1.30	YFKAF87	4	165
								58	1820	24.92	20500	1.40			
4.3	22300	333	109700	0.80	YFKI57R97	4	850	64	1630	22.41	20300	1.40			
4.9	19500	291	111400	0.90	YFKFI57R97	4	930	74	1420	19.45	20100	1.60			
					YFKAI57R97	4	820	83	1270	17.42	19800	1.75			
					YFKAFI57R97	4	870	90	1170	16.00	18800	1.55			
6.8	14300	213	77400	0.90	YFKI27R87	4	560	100	1050	14.45	19400	2.0			
7.2	13500	200	78900	0.90	YFKFI27R87	4	600	115	920	12.56	18900	2.2			
8.7	11200	166	80100	1.10	YFKAI27R87	4	530	129	810	11.17	18000	1.85			
9.8	9850	147	80700	1.20	YFKAFI27R87	4	570	144	730	10.00	17700	2.1			
								174	605	8.29	17100	2.3			
5.3	19700	134.99	150000	1.60	YFKI67	8	1230	200	525	7.21	16700	2.5			
6.6	16000	109.99	150000	2.0											
					YFKAI67	8	1230	62	1680	23.08	14400	0.90	YFK77	4	130
								71	1680	20.25	15900	1.00	YFKFI77	4	135
5.8	18000	164.50	150000	1.80	YFKI67	6	1160	81	1300	17.87	16600	1.10	YFKA77	4	120
7.1	14800	134.99	150000	2.2				91	1160	15.84	16500	1.20	YFKAF77	4	130
					YFKAI67	6	1160	107	990	13.52	16300	1.35			
								117	900	12.36	15500	1.10			
8.8	12000	164.50	150000	2.7	YFKI67	4	1130	133	790	10.84	15300	1.25			
11	9850	134.99	150000	2.2				151	700	9.56	15100	1.35			
					YFKAI67	4	1130	170	620	8.48	14800	1.45			
								199	530	7.24	14500	1.55			
5.9	17900	122.39	112300	1.00	YFKI57	8	830	15kW							
7.2	14600	100.22	113700	1.25	YFKFI57	8	910	2.3	56100	622	179400	0.90	YFKI87R107	4	1920
7.9	13400	91.65	114200	1.35	YFKAI57	8	800	2.8	47000	520	190000	1.05			
9.0	11600	79.75	114800	1.55	YFKAFI57	8	850	3.2	41000	454	190000	1.20	YFKAI87R107	4	1920
								4.1	32100	355	190000	1.55			
6.4	16500	150.41	112900	1.10	YFKI57	6	770	5.6	23600	261	190000	2.1			
7.8	13400	122.39	114200	1.35	YFKFI57	6	850								
9.6	11000	100.22	115000	1.65	YFKAI57	6	730	4.6	28700	318	150000	1.10	YFKI67R107	4	1330
10	10000	91.65	115300	1.80	YFKAFI57	6	790	5.3	25000	278	150000	1.30			
12	8730	79.75	115600	2.1				6.0	22000	244	150000	1.45	YFKAI67R107	4	1300
								6.8	19200	213	150000	1.65			
9.6	11000	150.41	115000	1.65	YFKI57	4	730	7.1	18500	206	150000	1.75			
12	8930	122.39	115600	2.0	YFKFI57	4	810	8.1	16200	180	150000	1.95			
14	7310	100.22	115900	2.5	YFKAI57	4	700	9.1	14400	160	150000	2.2			
16	6690	91.65	116000	2.7	YFKAFI57	4	760								
								6.3	20700	230	110700	0.85	YFKI57R107	4	940
11	9930	136.41	80700	1.30	YFKI27	4	495	6.9	19200	213	111600	0.95	YFKFI57R107	4	1020
12	9830	122.48	81100	1.45	YFKFI27	4	540	7.8	16800	187	112800	1.05	YFKAI57R107	4	900
13	8040	110.18	81400	1.60	YFKAI27	4	465	9.3	14200	157	113900	1.25	YFKAFI57R107	4	960
16	6560	89.89	81900	2.0	YFKAFI27	4	500	12	11000	122	115000	1.65			
18	5980	81.98	82100	2.2				14	9630	107	115400	1.85			
20	5180	70.95	82300	2.5											
								5.4	26600	179.86	190000	1.90	YFKI87	6	1810
13	8200	112.41	58400	1.00	YFKI07	4	340	5.9	24400	165.21	190000	2.0			
14	7350	100.75	58300	1.10	YFKFI07	4	350						YFKAI87	6	1810
16	6630	90.96	58000	1.20	YFKAI07	4	310								
17	6030	82.61	57500	1.35	YFKAFI07	4	335								
20	5350	73.30	56900	1.50				7.2	19900	134.99	150000	1.60	YFKI67	6	1230
22	4850	66.52	56200	1.65				8.8	16200	109.83	150000	1.95			
25	4170	57.17	55100	1.90									YFKAI67	6	1230
29	3640	49.90	54000	2.2											
34	3090	42.33	52500	2.4				8.9	16100	164.50	150000	2.0	YFKI67	4	1160
39	2700	37.00	51200	2.7				11	13200	134.99	150000	2.4			
													YFKAI67	4	1160
20	5150	70.54	32200	0.85	YFK97	4	225								
23	4560	62.55	32500	0.95	YFKF97	4	245	7.9	18100	122.39	112200	1.00	YFKI57	6	830
25	4130	56.55	32500	1.05	YFKA97	4	205	9.7	14800	100.22	113700	1.20	YFKFI57	6	910
30	3500	47.93	32500	1.25	YFKAF97	4	230	11	13500	91.65	114100	1.35	YFKAI57	6	800
34	3050	41.87	32200	1.40				12	11800	79.75	114800	1.55	YFKAFI57	6	850
38	2790	38.30	32000	1.55				14	10400	70.38	115200	1.75			
42	2500	34.23	31600	1.70											
47	2250	30.82	31300	1.90				9.7	14800	150.41	113700	1.20	YFKI57	4	770
52	2040	27.91	30800	2.1				12	12000	122.39	114800	1.50	YFKFI57	4	850
58	1800	24.75	30300	2.4				15	9830	100.22	114200	1.85	YFKAI57	4	730
64	1630	22.37	29800	2.6				16	8990	91.65	112500	2.0	YFKAFI57	4	790
								18	7820	79.75	109600	2.3			

输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
15kW								18.5kW							
11	13400	136.14	79000	0.95	YFK127	4	530	8.1	21700	179.86	190000	2.3	YFK187	4	1970
12	12000	122.48	79700	1.10	YFKF127	4	570	8.9	19900	165.21	190000	2.5			
13	10800	110.18	80300	1.20	YFKA127	4	500	10	17400	144.59	190000	2.9	YFKA187	4	1970
16	8820	89.89	81200	1.45	YFKAF127	4	540	11	15600	129.69	190000	3.2			
18	8040	81.98	81400	1.60											
21	6960	70.95	81600	1.85				11	16300	134.99	150000	1.95	YFK167	4	1210
23	6140	62.60	80000	2.1				13	13200	109.83	150000	2.4			
27	5300	54.07	78000	2.5				17	10600	87.86	150000	3.0	YFKA167	4	1210
31	4690	47.82	76200	2.8											
16	8920	90.96	50900	0.90	YFK107	4	380	9.7	18300	100.22	112100	1.00	YFK157	6	870
18	8110	82.16	51100	1.00	YFKF107	4	390	11	16700	91.65	112800	1.10	YFKF157	6	950
20	7190	73.30	51200	1.10	YFKA107	4	350	12	14500	79.75	111500	1.25	YFKA157	6	830
22	6530	66.52	51000	1.25	YFKAF107	4	375	14	12800	70.38	109900	1.40	YFKAF157	6	890
26	5610	57.17	50600	1.45											
29	4900	49.90	50000	1.60				12	14800	122.39	111600	1.20	YFK157	4	820
34	4150	42.33	49100	1.75				15	12100	100.22	109100	1.50	YFKF157	4	900
39	3630	37.00	48200	2.0				16	11100	91.65	107800	1.65	YFKA157	4	780
45	3210	32.69	47300	2.2				18	9620	79.75	105600	1.85	YFKAF157	4	840
47	3070	31.27	47000	2.2				21	8490	70.38	103400	2.1			
50	2840	29.00	46400	2.5				24	7360	61.02	100700	2.5			
								27	6550	54.29	98500	2.8			
30	4700	47.93	28100	0.90	YFK97	4	265	31	5640	46.79	95500	3.2			
35	4110	41.87	28400	1.05	YFKF97	4	285	39	4580	38.02	91300	3.9			
38	3760	38.30	28500	1.15	YFKA97	4	245								
43	3360	34.23	28500	1.30	YFKAF97	4	270	13	13300	110.18	79000	1.00	YFK127	4	580
47	3020	30.82	28400	1.40				16	10800	89.89	79000	1.20	YFKF127	4	620
52	2740	27.91	28300	1.55				18	98900	81.98	78500	1.30	YFKA127	4	550
59	2460	24.75	28000	1.75				21	8560	70.95	77500	1.50	YFKAF127	4	590
65	2190	22.37	27700	1.95				23	7550	62.60	76400	1.70			
77	1860	18.96	27200	2.3				27	6520	54.07	74800	2.0			
88	1620	16.56	26600	2.7				31	5770	47.82	73400	2.2			
								36	4850	40.19	69900	2.7			
47	3080	31.39	17300	0.90	YFK87	4	205	40	4370	36.25	68000	3.0			
52	2730	27.88	17600	0.95	YFKF87	4	215	47	3780	31.37	68000	3.4			
59	2440	24.92	17800	1.00	YFKA87	4	190	53	3340	27.68	66200	3.9			
65	2200	22.41	18000	1.05	YFKAF87	4	205								
75	1910	19.45	18000	1.20				20	8840	73.30	46300	0.90	YFK107	4	430
84	1710	17.42	18000	1.30				22	8020	66.52	46600	1.00	YFKF107	4	440
91	1570	16.00	17800	1.55				26	6890	57.19	46800	1.15	YFKA107	4	400
101	1420	14.45	17800	1.50				29	6020	49.90	46700	1.30	YFKAF107	4	425
116	1230	12.56	17600	1.60				35	5100	42.33	46300	1.45			
131	1100	11.17	16600	1.35				40	4460	37.00	45700	1.60			
146	980	10.00	16400	1.55				45	3940	32.69	45100	1.80			
176	810	8.29	16000	1.70				47	3770	31.28	44900	1.85			
202	705	7.21	15700	1.85				51	3500	29.00	44400	2.1			
18.5kW								56	3170	26.32	43800	2.3			
2.8	57800	520	176300	0.85				65	2730	22.62	42700	2.6			
3.2	50400	454	189200	1.00	YFK187R107	4	1970	74	2380	19.74	41700	3.0			
4.1	39500	355	190000	1.25				88	2020	16.75	40400	3.5			
5.6	29000	261	190000	1.70	YFKA187R107	4	1970								
6.6	24600	221	190000	2.0											
4.6	35300	318	150000	0.90				35	5050	41.87	25100	0.85	YFK97	4	315
5.3	30800	278	150000	1.05	YFK167R107	4	1380	48	3720	30.82	26000	1.15	YFKF97	4	335
6.0	27100	244	150000	1.20				53	3360	27.91	26000	1.30	YFKA97	4	395
6.9	23600	213	150000	1.35	YFKA167R107	4	1380	59	2980	24.75	26000	1.45	YFKAF97	4	320
7.1	22800	206	150000	1.40				65	2700	22.37	25900	1.60			
8.1	20000	180	150000	1.60				77	2290	18.96	25700	1.90			
9.2	17700	160	150000	1.80				88	2000	16.56	25300	2.2			
11	15000	135	150000	2.1				106	1670	13.85	24800	2.6			
12	13100	118	150000	2.4				122	1450	11.99	24300	2.7			
7.8	20700	187	110700	0.85	YFK157R107	4	990	59	3000	24.92	15600	0.85	YFK87	4	255
9.3	17400	157	112500	1.05	YFKF157R107	4	1070	65	2700	22.41	15900	0.82	YFKF87	4	265
12	13600	122	114100	1.35	YFKA157R107	4	950	75	2340	19.45	16200	1.00	YFKA87	4	240
14	11900	107	112300	1.50	YFKAF157R107	4	1010	84	2100	17.42	16400	1.05	YFKAF87	4	255
5.4	32800	179.86	190000	1.55	YFK187	6	1850	101	1740	14.45	16500	1.20			
5.9	30100	165.21	190000	1.65				117	1510	12.56	16400	1.30			
6.7	26300	144.59	190000	1.90	YFKA187	6	1850	131	1350	11.17	15400	1.10			
7.5	23600	129.69	190000	2.1				147	1210	10.00	15300	1.25			
								177	1000	8.29	15100	1.40			
								203	870	7.21	14900	1.50			

输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
22kW								22kW							
3.2	60000	454	172300	0.85	YFKI87R107	4	1980	40	5310	37.00	43200	1.35	YFK107	4	445
4.1	47000	355	190000	1.05				45	4690	32.69	42900	1.55	YFKF107	4	455
5.6	34500	261	190000	1.45	YFKA187R107	4	1980	47	4490	31.28	42800	1.50	YFKA107	4	415
6.6	29300	221	190000	1.70				51	4160	29.00	42500	1.75	YFKAF107	4	440
7.6	25600	193	190000	1.95				56	3770	26.32	42000	1.90			
8.9	21600	163	190000	2.3				65	3240	22.62	41200	2.2			
								74	2830	19.74	40400	2.2			
5.3	36700	278	150000	0.85	YFK167R107	4	1400	88	2400	16.75	39300	2.5			
6.0	32200	244	150000	1.00				100	2100	14.64	38400	2.6			
6.9	28200	213	150000	1.15	YFKA167R107	4	1400	109	1930	13.43	36800	2.9			
7.1	27200	206	150000	1.20				125	1680	11.73	35900	2.9			
8.1	23800	180	150000	1.35				147	1430	9.94	34800	3.3			
9.2	21100	160	150000	1.50											
11	17900	135	150000	1.80				48	4420	30.82	23500	0.95	YFK97	4	330
12	15600	118	150000	2.0				53	4000	27.91	23800	1.05	YFKF97	4	350
								59	3550	24.75	24100	1.20	YFKA97	4	310
93	20800	157	109800	0.85	YFK157R107	4	1000	65	3210	22.37	24200	1.35	YFKAF97	4	335
12	16200	122	108600	1.10	YFKF157R107	4	1080	77	2720	18.96	24100	1.60			
14	14100	107	107300	1.25	YFKA157R107	4	970	88	2370	16.56	24000	1.80			
					YFKAF157R107	4	1030	106	1990	13.85	23700	1.90			
5.4	39000	179.86	190000	1.30	YFK187	6	1860	122	1720	11.99	23300	2.1			
5.9	35800	165.21	190000	1.40				141	1490	10.41	21800	2.2			
6.7	31300	144.59	190000	1.60	YFKA187	6	1860	168	1250	8.71	21300	2.3			
7.5	28100	129.69	190000	1.80											
8.6	24400	112.60	190000	2.0				75	2790	19.45	14400	0.80	YFK87	4	270
								84	2500	17.42	14800	0.90	YFKF87	4	280
8.1	25800	179.86	190000	1.95	YFK187	4	1810	101	2070	14.4	15100	0.95	YFKA87	4	255
8.9	23700	165.21	190000	2.1				117	1800	12.56	15300	1.00	YFKAF87	4	270
10	20700	144.59	190000	2.4	YFKA187	4	1810	131	1600	11.17	14200	1.05			
11	18600	129.69	190000	2.7				147	1430	10.00	14200	1.10			
								177	1190	8.29	14300	1.20			
11	19400	134.99	150000	1.65	YFK167	4	1230	203	1030	7.21	14200	1.25			
13	15700	109.83	150000	2.0											
17	12600	87.86	150000	2.5	YFKA167	4	1230								
19	11200	78.14	150000	2.9				5.6	47000	261	190000	1.05	YFK187R107	4	2030
								6.6	39800	221	190000	1.25			
								7.6	34800	193	190000	1.45	YFKA187R107	4	2030
								9.0	29400	163	190000	1.70			
9.7	21700	100.22	105900	0.85	YFK157	6	880								
11	19900	91.65	105900	0.90	YFKF157	6	960	6.9	38300	213	150000	0.85	YFK167R107	4	1450
12	17300	79.75	105500	1.05	YFKA157	6	850	7.1	37000	206	150000	0.85			
14	15200	70.38	104600	1.20	YFKAF157	6	910	8.1	32400	180	150000	1.00	YFKA167R107	4	1450
16	13200	61.20	103300	1.35				9.2	28700	160	150000	1.10			
								11	24400	135	150000	1.30			
12	17600	122.39	105500	1.05	YFK157	4	830	12	21300	118	150000	1.50			
15	14400	100.22	104100	1.25	YFKF157	4	910								
16	13100	91.65	103200	1.35	YFKA157	4	800	8.2	35100	179.86	190000	1.45	YFK187	4	1860
18	11400	79.75	101600	1.55	YFKAF157	4	850	8.9	32200	165.21	190000	1.55			
21	10100	70.38	99800	1.80				10	28200	144.59	190000	1.75	YFKA187	4	1860
24	8750	61.02	97700	2.1				11	25300	129.69	190000	2.0			
27	7790	54.29	95800	2.3				13	21900	112.60	190000	2.3			
31	6710	46.79	93200	2.7				14	19900	102.16	190000	2.5			
39	5450	38.02	89400	3.3				17	17200	88.00	190000	2.9			
16	12900	89.89	73900	1.00	YFK127	4	600								
18	11800	81.98	73800	1.10	YFKF127	4	640	13	21400	109.83	150000	1.50	YFK167	4	1280
21	10200	70.95	73400	1.30	YFKA127	4	570	17	17100	87.86	150000	1.85			
23	8980	62.60	72800	1.45	YFKAF127	4	600	19	15200	78.14	150000	2.1	YFKA167	4	1280
27	7750	54.07	71700	1.70				22	13300	68.0	150000	2.4			
31	6860	47.82	70700	1.90				24	11800	60.74	150000	2.7			
36	5760	40.19	69000	2.3											
40	5200	36.25	67800	2.5				15	19500	100.22	92700	0.90	YFK157	4	880
47	4500	31.37	66200	2.9				16	17900	91.65	92800	1.00	YFKF157	4	960
53	3970	27.68	64600	3.3				18	15500	79.7	92400	1.15	YFKA157	4	850
61	3430	23.91	62800	3.8				21	13700	70.38	91800	1.30	YFKAF157	4	910
69	3030	21.15	61200	4.3				24	11900	61.02	90700	1.50			
								27	10600	54.29	89500	1.70			
26	8200	57.17	43000	1.00	YFK107	4	445	31	9120	46.79	87800	1.95			
29	7160	49.90	43300	1.10	YFKF107	4	455	39	7410	38.02	85100	2.4			
35	6070	42.33	43400	1.20	YFKA107	4	415	47	6100	31.30	82200	3.0			
					YFKAF107	4	440								

输出转速 output speed na r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed na r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
30kW								37kW							
21	13800	70.95	64200	0.95	YFKI27	4	650	41	8710	36.25	59000	1.50	YFKI27	4	700
23	12200	62.60	64600	1.05	YFKFI27	4	700	47	7540	31.37	58500	1.70	YFKFI27	4	740
27	10500	54.07	64700	1.25	YFKAI27	4	630	53	6650	27.68	57800	1.95	YFKAI27	4	670
31	9320	47.82	64400	1.40	YFKAFI27	4	660	62	5740	23.91	56900	2.3	YFKAFI27	4	710
37	7830	40.19	63700	1.65				70	5080	21.15	56000	2.6			
41	7060	36.25	63100	1.85				83	4270	17.77	54500	2.8			
47	6110	31.37	62000	2.1				102	3450	14.35	52500	3.0			
53	5390	28.68	61000	2.4				115	3070	12.79	50200	3.1			
62	4660	23.91	59600	2.8				137	2580	10.74	48600	3.5			
								169	2090	8.69	46600	3.5			
35	8250	42.33	36100	0.90	YFKI07	4	500	40	8890	37.00	29000	0.80	YFKI07	4	550
40	7210	37.00	37600	1.00	YFKFI07	4	510	47	7520	31.28	33000	0.90	YFKFI07	4	560
47	6100	31.28	38000	1.10	YFKAI07	4	470	51	6970	29.00	34200	1.05	YFKAI07	4	520
51	5650	29.00	38000	1.25	YFKAFI07	4	495	56	6320	26.32	34500	1.15	YFKAFI07	4	540
56	5130	26.32	38000	1.40				65	5440	22.62	34700	1.30			
65	4410	22.62	37700	1.65				74	4740	19.74	34700	1.50			
74	3850	19.74	37400	1.85				88	4020	16.75	34500	1.75			
88	3260	16.75	36700	2.2				100	3520	14.64	34200	1.95			
100	2850	14.64	36100	2.4				109	3230	13.43	32300	1.35			
109	2620	13.43	34400	1.65				125	2820	11.73	32000	1.55			
125	2280	11.73	33800	1.90				148	2390	9.94	31400	1.75			
148	1940	9.94	33000	2.2				169	2090	8.69	30900	1.95			
169	1690	8.69	32200	2.4				45kW							
59	4820	24.75	19600	0.90	YFKI97	4	385	6.6	59800	221	172600	0.85	YFKI87RI07	4	2110
66	4360	22.37	20100	1.00	YFKFI97	4	405	7.6	52300	193	186100	0.95			
78	3690	18.96	20700	1.15	YFKAI97	4	365	9.0	44200	163	190000	1.15	YFKAI87RI07	4	2110
87	3230	16.56	21000	1.35	YFKAFI97	4	390								
106	2700	13.85	21200	1.60				11	36600	135	150000	0.85	YFKI67RI07	4	1530
123	2340	11.99	21100	1.65				12	32000	118	150000	1.00			
141	2030	10.41	19500	1.40									YFKAI67RI07	4	1530
169	1700	8.71	19400	1.55				8.2	52600	179.86	185500	0.95	YFKI87	4	1940
37kW								8.9	48300	165.21	190000	1.05			
5.6	58000	261	176000	0.85	YFKI87RI07	4	2080	10	42300	144.59	190000	1.20	YFKAI87	4	1940
6.6	49200	221	190000	1.00				11	37900	129.69	190000	1.30			
7.6	43000	193	190000	1.15	YFKAI87RI07	4	2080	13	32900	112.60	190000	1.50			
9.0	36300	163	190000	1.40				14	29900	102.16	190000	1.65			
								17	25700	88.00	190000	1.95			
8.1	40000	180	150000	0.80	YFKI67RI07	4	1500	20	21600	73.96	187700	2.3			
9.2	35500	160	150000	0.90											
11	30100	135	150000	1.05	YFKAI67RI07	4	1500	13	32100	109.83	150000	1.00	YFKI67	4	1360
12	26300	118	150000	1.20				17	25700	87.86	150000	1.25			
								19	22800	78.14	150000	1.40	YFKAI67	4	1360
8.2	43200	179.86	190000	1.15	YFKI87	4	1910	22	19900	68.07	150000	1.60			
8.9	39700	165.21	190000	1.25				24	17800	60.74	149000	1.80			
10	34800	144.59	190000	1.45	YFKAI87	4	1910	28	15100	51.77	145300	2.1			
11	31200	129.69	190000	1.60				34	12500	42.89	140600	2.5			
13	27100	112.60	190000	1.85											
14	24600	102.16	190000	2.0				21	20600	70.38	76800	0.85	YFKI57	4	960
17	21200	88.00	190000	2.4				24	17800	61.02	77700	1.00	YFKFI57	4	1040
								27	15900	54.29	77900	1.15	YFKAI57	4	930
13	26400	109.83	150000	1.20	YFKI67	4	1330	31	13700	46.79	77800	1.30	YFKAFI57	4	980
17	21100	87.86	150000	1.50				39	11100	38.02	76900	1.60			
19	18800	78.14	150000	1.70	YFKAI67	4	1330	47	9150	31.30	75500	1.95			
22	16400	68.07	150000	1.95				53	8080	27.62	74300	2.2			
24	14600	60.74	150000	2.2				61	7000	23.95	72800	2.6			
28	12400	51.77	150000	2.6				69	6230	21.31	71500	2.9			
								80	5370	18.37	69700	3.3			
16	22000	91.65	83600	0.80	YFKI57	4	930	31	14000	47.82	52800	0.95	YFKI27	4	730
18	19200	79.75	84500	0.95	YFKFI57	4	1010	37	11700	40.19	53900	1.10	YFKFI27	4	770
21	16900	70.38	84800	1.05	YFKAI57	4	900	41	10600	36.25	54200	1.25	YFKAI27	4	700
24	14700	61.02	84600	1.25	YFKAFI57	4	960	47	9170	31.37	54400	1.40	YFKAFI27	4	740
27	13000	54.29	84100	1.40				53	8090	27.68	54200	1.60			
31	11200	46.79	83200	1.60				62	6990	23.91	53800	1.85			
39	9140	38.02	81300	1.95				70	6180	21.15	53200	2.1			
47	7520	31.30	79100	2.4				83	5190	17.77	52200	2.5			
								102	4190	14.35	50700	2.9			
23	15000	62.60	57500	0.85	YFKI27	4	700	115	3740	12.79	48300	2.3			
27	13000	54.07	58500	1.00	YFKFI27	4	740	137	3140	10.74	47000	2.5			
31	11500	47.82	59000	1.15	YFKAI27	4	670	169	2540	8.68	45300	2.8			
37	9660	40.19	59100	1.35	YFKAFI27	4	710								

输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhang load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhang load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg
45kW								75kW							
51	8480	29.00	25600	0.85	YFK107	4	570	39	18400	38.02	60800	1.00	YFK157	4	1220
56	7690	26.32	28300	0.95	YFKH07	4	590	47	15100	31.30	62200	1.20	YFKH57	4	1300
65	6610	22.62	31000	1.10	YFKAI07	4	550	54	13400	27.62	62600	1.35	YFKAI57	4	1190
74	5770	19.74	31700	1.25	YFKAF07	4	570	62	11600	23.95	62600	1.55	YFKAF157	4	1250
88	4890	16.75	31900	1.45				69	10300	21.31	62400	1.75			
100	4280	14.64	31900	1.60				81	8890	18.37	61800	2.0			
109	3930	13.43	29900	1.10				99	7220	14.92	60500	2.5			
125	3430	11.73	29900	1.25				117	6120	12.65	59300	2.8			
148	2910	9.94	29600	1.45				47	15200	31.37	39200	0.85	YFK127	4	990
169	2540	8.69	29300	1.60				53	13400	27.68	40800	0.95	YFKH27	4	1030
55kW								62	11600	23.91	42200	1.10	YFKAI27	4	960
10	51500	144.59	187400	0.95	YFKI87	4	2070	70	10200	21.15	42900	1.25	YFKAF127	4	1000
11	46200	129.69	190000	1.10				83	8600	17.77	43500	1.50			
13	40100	112.00	186500	1.25	YFKAI87	4	2070	103	6940	14.35	43700	1.75			
14	36400	102.16	187100	1.35				116	6190	12.79	41100	1.40			
17	31300	88.00	184200	1.60				138	5200	10.74	41000	1.55			
20	26300	73.96	180200	1.90				171	4200	8.68	40400	1.70			
23	22800	64.04	176300	2.2				90kW							
								14	59300	102.16	151300	0.85	YFKI87	4	2280
17	31300	87.86	145300	1.00	YFKI67	4	1490	17	51100	88.00	153400	1.00			
19	27800	78.14	144600	1.15				20	42900	73.96	154200	1.15	YFKAI87	4	2280
22	24200	68.07	143300	1.30	YFKAI67	4	1490	23	37200	64.04	153800	1.35			
24	21600	60.74	141700	1.50				28	31000	53.36	152200	1.60			
28	18400	51.77	139100	1.75				33	26400	45.50	149900	1.90			
34	15300	42.89	135400	2.1				35	24700	42.51	148700	2.0			
40	13000	36.61	131900	2.5				38	22400	38.57	146900	2.2			
								22	39500	68.07	115100	0.80	YFKI67	4	1690
24	21700	61.02	69000	0.85	YFKI57	4	1090	24	35300	60.74	116600	0.90			
27	19300	54.29	70200	0.95	YFKH57	4	1170	29	30100	51.77	117600	1.05	YFKAI67	4	1690
32	16700	46.79	71200	1.10	YFKAI57	4	1050	35	24900	42.89	117600	1.30			
39	13500	38.02	71500	1.35	YFKAF57	4	1110	40	21300	36.61	116700	1.50			
47	11100	31.30	71000	1.60				46	18700	32.25	115500	1.70			
53	9840	27.62	70400	1.85				51	16700	28.77	114200	1.90			
62	8530	23.95	69400	2.1				60	14200	24.52	111900	2.2			
69	7590	21.31	68400	2.4				73	11800	20.32	108800	2.7			
80	6540	18.37	67000	2.8				85	10100	17.34	106000	3.2			
99	5310	14.92	64800	3.4				39	22100	38.02	52700	0.80	YFKI57	4	1300
117	4510	12.65	62900	3.8				47	18200	31.30	55500	1.00	YFKH57	4	1380
								54	16000	27.62	56700	1.10	YFKAI57	4	1260
37	14300	40.19	47400	0.90	YFKI27	4	850	62	13900	23.95	57500	1.30	YFKAF157	4	1320
47	11200	31.37	49300	1.15	YFKH27	4	890	69	12400	21.31	57900	1.45			
53	9850	27.68	49700	1.30	YFKAI27	4	820	81	10700	18.37	57900	1.70			
								99	8670	14.92	57400	2.1			
62	8510	23.91	49900	1.55	YFKAF127	4	860	117	7350	12.65	56600	2.3			
70	7530	21.15	49800	1.75				62	13900	23.91	36400	0.95	YFKI27	4	1070
83	6330	17.77	49300	2.0				70	12300	21.15	37800	1.05	YFKH27	4	1110
103	5110	14.35	48300	2.4				83	10300	17.77	39200	1.25	YFKAI27	4	1040
115	4550	12.79	45900	1.85				103	8330	14.35	40200	1.45	YFKAF127	4	1080
137	3830	10.74	45000	2.1				116	7420	12.79	37600	1.15			
170	3090	8.68	43600	2.3				138	6240	10.74	38000	1.30			
75kW								171	5040	8.68	38000	1.45			
11	62800	129.69	164100	0.80	YFKI87	4	2200	110kW							
13	54500	112.60	166100	0.90				17	62300	88.00	136000	0.80	YFKI87	4	2460
14	49400	102.16	166600	1.00	YFKAI87	4	2200	20	52300	73.96	139500	0.95			
17	42600	88.00	166600	1.15				23	45300	64.04	141000	1.10	YFKAI87	4	2460
20	35800	73.96	165300	1.40				28	37700	53.36	141500	1.30			
23	31000	64.04	163400	1.60				33	32200	45.50	140800	1.55			
28	25800	53.36	160100	1.95				35	30100	42.51	140200	1.65			
33	22000	45.50	156700	2.3				39	27300	38.57	139100	1.85			
								45	23500	33.23	137000	2.1			
19	37800	78.14	126100	0.85	YFKI67	4	1620	53	19800	27.92	134000	2.5			
22	32900	68.07	127100	0.95				29	36600	51.77	105500	0.85	YFKI67	4	1880
24	29400	60.74	127300	1.10	YFKAI67	4	1620	35	30300	42.89	107500	1.05			
29	25100	51.77	126800	1.30				41	25900	36.61	108100	1.25	YFKAI67	4	1880
35	20800	42.89	125200	1.55				46	22800	32.25	107900	1.40			
40	17700	36.61	123200	1.80				52	20400	28.77	107400	1.55			
46	15600	32.25	121300	2.0				61	17300	24.52	106100	1.85			
51	13900	28.77	119300	2.3				73	14400	20.32	104000	2.2			
60	11900	24.52	116300	2.7				86	12300	17.34	101800	2.6			

输出转速 output speed n r/min	输出转矩 output torque Ma N.m	传动比 Ratio i	径向载荷 Permissible overhang load outputside Fa N	使用系数 service factor fb	机型号 Type	极数 Pole	重量 weight kg	输出转矩 output torque Ma N.m	输出转速 output speed n r/min	传动比 Ratio i	径向载荷 Permissible overhang load outputside Fa N	机型号 Type	功 率 Power kw/tp	重量 weight kg
110kW								200	0.20	6832	5640	YFK37R17	0.12	19
62	16900	23.95	50800	1.05	YFKI57	4	1490		0.23	5922	5640	YFKF37R17	0.12	22
70	15100	21.31	51900	1.20	YFKF157	4	1560		0.25	5491	5640	YFKA37R17	0.12	19
81	13000	18.37	52700	1.40	YFKA157	4	1450		0.29	4759	5640	YFKAF37R17	0.12	21
100	10600	14.92	53100	1.70	YFKAF157	4	1510		0.33	4160	5640			
117	8950	12.65	53000	1.90					0.38	3645	5640			
132kW									0.43	3205	5640			
20	62800	73.96	123300	0.80	YFKI87	4	2560		0.49	2801	5640			
23	54400	64.04	127000	0.90					0.56	2454	5640			
28	45300	53.36	129800	1.10	YFKA187	4	2560		0.64	2166	5640			
33	38600	45.50	130800	1.30					0.73	1891	5640			
35	36100	42.51	130900	1.40					0.83	1660	5640			
39	32700	38.57	130700	1.55					0.94	1466	5640			
45	28200	33.23	129800	1.75					1.1	1288	5640			
53	23700	27.92	127900	2.1					1.2	1136	5640			
61	20500	24.18	125900	2.3					1.4	996	5640			
74	17100	20.15	122800	2.6					1.6	876	5640			
86	14600	17.18	119700	2.8					1.8	761	5640			
									2.1	671	5640			
35	36400	42.89	96400	0.90	YFKI67	4	1980	2.4	585	5640				
41	31100	36.61	98600	1.05				2.7	512	5640				
46	27400	32.25	99600	1.15	YFKA167	4	1980	3.1	451	5640				
52	24400	28.77	99900	1.30				3.5	396	5640				
61	20800	24.52	99800	1.55				4.0	346	5640				
73	17200	20.32	98700	1.85										
86	14700	17.34	97300	2.2				4.3	304	5640	YFK37R17	0.18	19	
								4.9	267	5640	YFKF37R17	0.18	21	
62	20300	23.95	43400	0.90	YFKI57	4	1590	5.7	234	5640	YFKA37R17	0.18	19	
70	18100	21.31	45300	1.00	YFKF157	4	1660	6.4	205	5640	YFKAF37R17	0.18	20	
81	15600	18.37	47000	1.15	YFKA157	4	1550							
100	12700	14.92	48500	1.40	YFKAF157	4	1610	7.2	181	5640	YFK37R17	0.25	20	
117	10700	12.65	49100	1.60				8.1	160	5640	YFKF37R17	0.25	22	
160kW								9.5	136	5640	YFKA37R17	0.25	19	
28	54900	53.36	114900	0.90	YFKI87	4	2560	10	127	5640	YFKAF37R17	0.25	21	
33	46800	45.50	118100	1.05										
45	34200	33.23	120500	1.45	YFKA187	4	2560	12	110	5640	YFK37R17	0.37	21	
53	28700	27.92	120100	1.75				14	96	5640	YFKF37R17	0.37	23	
61	24900	24.18	119100	1.90							YFKA37R17	0.37	20	
74	20700	20.15	117200	2.1							YFKAF37R17	0.37	22	
86	17700	17.18	114900	2.3				400	0.14	10138	5920	YFK47R37	0.12	34
								0.16	8534	5920	YFKF47R37	0.12	37	
41	37700	36.61	86500	0.85	YFKI67	4	1980	0.18	7662	5920	YFKA47R37	0.12	33	
61	25200	24.52	91700	1.25				0.20	6826	5920	YFKAF47R37	0.12	36	
73	20900	20.32	92000	1.55	YFKA167	4	1980	0.23	5983	5920				
86	17800	17.34	91600	1.80				0.27	5159	5920				
								0.30	4601	5920				
81	18900	18.37	39800	0.95	YFKI57	4	1590	0.35	3940	5920				
100	15400	14.92	42600	1.15	YFKF157	4	1660	0.40	3477	5920				
117	13000	12.65	44100	1.30	YFKA157	4	1550	0.45	3043	5920				
200kW								0.51	2733	5920				
33	58500	45.50	100000	0.85	YFKI87	4	2560	0.59	2354	5920				
45	42700	33.23	107300	1.15				0.67	2063	5920				
53	35900	27.92	109000	1.40	YFKA187	4	2560	0.76	1819	5920				
61	31100	24.18	109500	1.55				0.87	1586	5920				
74	25900	20.15	109100	1.70				0.99	1388	5920				
86	22100	17.18	108100	1.85				1.1	1222	5920				
								1.3	1097	5920				
61	31500	24.52	80100	1.00	YFKI67	4	1980	1.5	945	5920				
73	26100	20.32	82400	1.20				1.7	831	5920				
86	22300	17.34	83400	1.45	YFKA167	4	1980	1.9	718	5920				
								2.2	639	5920				
100	19200	14.92	34200	0.95	YFKI57	4	1590	2.4	552	5920	YFK47R37	0.18	33	
117	16300	12.65	36900	1.05	YFKF157	4	1660	2.7	495	5920	YFKF47R37	0.18	36	
					YFKA157	4	1550	3.1	426	5920	YFKA47R37	0.18	32	
					YFKAF157	4	1610				YFKAF47R37	0.18	35	
								3.5	375	5920	YFK47R37	0.25	34	
								4.0	327	5920	YFKF47R37	0.25	37	
								4.5	289	5920	YFKA47R37	0.25	33	
											YFKAF47R37	0.25	36	



输出转矩 output torque Ma N.m	输出转速 output speed na r/min	传动比 Ratio i	径向载荷 Permissible overhung load outside Fa N	机型号 Type	功率 Power kw/lp	重量 weight kg	输出转矩 output torque Ma N.m	输出转速 output speed na r/min	传动比 Ratio i	径向载荷 Permissible overhung load outside Fa N	机型号 Type	功率 Power kw/lp	重量 weight kg
400	5.4	256	5920	YFK47R37	0.37	35	820	0.79	1739	10300	YFK67R37	0.12	45
	6.2	225	5920	YFKJ47R37	0.37	38		0.90	1535	10300	YFKF67R37	0.12	51
	7.0	198	5920	YFKA47R37	0.37	34		1.0	1351	10300	YFKA67R37	0.12	42
				YFKAJ47R37	0.37	37					YFKAJ67R37	0.12	48
	7.9	171	5920	YFK47R37	0.55	37		1.1	1171	10300	YFK67R37	0.18	45
	8.9	153	5920	YFKJ47R37	0.55	40		1.3	1034	10300	YFKF67R37	0.18	51
	10	131	5920	YFKA47R37	0.55	36		1.5	903	10300	YFKA67R37	0.18	42
				YFKAJ47R37	0.55	39		1.7	793	10300	YFKAJ67R37	0.18	48
600	0.11	12169	7630	YFK57R37	0.12	39	1550	0.09	15310	15400	YFK77R37	0.12	69
	0.12	11162	7630	YFKJ57R37	0.12	44		0.10	14043	15400	YFKF77R37	0.12	78
	0.15	9503	7630	YFKA57R37	0.12	37		0.12	11955	15400	YFKA77R37	0.12	62
	0.16	8547	7630	YFKAJ57R37	0.12	43		0.14	10217	15400	YFKAJ77R37	0.12	70
	0.19	7277	7630					0.16	8809	15400			
	0.21	6478	7630					0.18	7528	15400			
	0.24	5662	7630					0.21	6606	15400			
	0.27	5033	7630					0.24	5774	15400			
	0.32	4340	7630					0.27	5089	15400			
	0.36	3854	7630					0.31	4489	15400			
	0.41	3390	7630					0.35	3961	15400			
	0.47	2924	7630					0.40	3485	15400			
	0.53	2593	7630					0.48	2901	15400			
	0.61	2249	7630					0.51	2717	15400			
	0.70	1986	7630					0.56	2370	15400	YFK77R37	0.18	69
	0.79	1743	7630					0.64	2050	15400	YFKJ77R37	0.18	78
	0.90	1539	7630					0.75	1772	15400	YFKA77R37	0.18	62
	1.0	1354	7630					0.87	1514	15400	YFKAJ77R37	0.18	70
	1.2	1174	7630					0.94	1388	15400	YFK77R37	0.25	70
	1.3	1036	7630					1.1	1218	15400	YFKJ77R37	0.25	78
								1.2	1053	15400	YFKA77R37	0.25	62
											YFKAJ77R37	0.25	70
	1.5	906	7630	YFK57R37	0.18	39		1.5	924	15400	YFK77R37	0.37	71
	1.6	806	7630	YFKJ57R37	0.18	44		1.7	815	15400	YFKJ77R37	0.37	79
	1.9	699	7630	YFKA57R37	0.18	37		2.0	709	15400	YFKA77R37	0.37	63
	2.2	615	7630	YFKAJ57R37	0.18	43					YFKAJ77R37	0.37	71
								2.2	622	15400	YFK77R37	0.55	73
	2.4	544	7630	YFK57R37	0.25	40		2.5	552	15400	YFKJ77R37	0.55	81
	2.8	473	7630	YFKJ57R37	0.25	45		2.8	485	15400	YFKA77R37	0.55	65
	3.1	421	7630	YFKA57R37	0.25	38					YFKAJ77R37	0.55	73
				YFKAJ57R37	0.25	43		3.2	428	15400	YFK77R37	0.75	74
	3.8	362	7630	YFK57R37	0.37	41		3.8	367	15400	YFKJ77R37	0.75	82
	4.3	319	7630	YFKJ57R37	0.37	45					YFKA77R37	0.75	66
	4.9	280	7630	YFKA57R37	0.37	39					YFKAJ77R37	0.75	74
				YFKAJ57R37	0.37	44							
	5.5	246	7630	YFK57R37	0.55	43							
	6.3	215	7630	YFKJ57R37	0.55	47							
	7.1	192	7630	YFKA57R37	0.55	43							
				YFKAJ57R37	0.55	46							
	8.3	166	7630	YFK57R37	0.75	44							
	9.6	145	7630	YFKJ57R37	0.75	48							
	11	129	7630	YFKA57R37	0.75	42							
				YFKAJ57R37	0.75	47							
	13	111	7630	YFK57R37	1.1	49							
	14	97	7630	YFKJ57R37	1.1	54							
				YFKA57R37	1.1	47							
				YFKAJ57R37	1.1	53							
820	0.11	12139	10300	YFK67R37	0.12	45							
	0.12	11134	10300	YFKJ67R37	0.12	51							
	0.15	9479	10300	YFKA67R37	0.12	43							
	0.17	8173	10300	YFKAJ67R37	0.12	48							
	0.19	7259	10300										
	0.21	6462	10300										
	0.24	5648	10300										
	0.28	4846	10300										
	0.32	4329	10300										
	0.37	3750	10300										
	0.42	3315	10300										
	0.47	2917	10300										
	0.55	2532	10300										
	0.62	2244	10300										
	0.70	1981	10300										

输出转矩 output torque Ma N.m	输出转速 output speed na r/min	传动比 Ratio i	径向载荷 Permissible overhung load outputsides Fa N	机型号 Type	功率 Power kw/lp	重量 weight kg	输出转矩 output torque Ma N.m	输出转速 output speed na r/min	传动比 Ratio i	径向载荷 Permissible overhung load outputsides Fa N	机型号 Type	功率 Power kw/lp	重量 weight kg
1550	4.3	328	15400	YFK77R37	1.1	79	4300	0.36	3583	40000	YFK97R57	0.25	180
	4.8	290	15400	YFKF77R37	1.1	87		0.42	3108	40000	YFKF97R57	0.25	200
	5.6	252	15400	YFKA77R37	1.1	72					YFKA97R57	0.25	160
				YFKAF77R37	1.1	79					YFKAF97R57	0.25	185
	0.09	14829	27300	YFK87R57	0.12	120		0.50	2757	40000	YFK97R57	0.37	180
	0.10	13168	27300	YFKF87R57	0.12	130		0.57	2419	40000	YFKF97R57	0.37	200
	0.12	11737	27300	YFKA87R57	0.12	105		0.32	2123	40000	YFKA97R57	0.37	165
	0.14	10217	27300	YFKAF87R57	0.12	120					YFKAF97R57	0.37	190
	0.15	9073	27300					0.73	1856	40000	YFK97R57	0.55	180
	0.18	7854	27300					0.84	1625	40000	YFKF97R57	0.55	205
	0.20	6832	27300					0.95	1430	40000	YFKA97R57	0.55	165
	0.23	5930	27300					1.1	1261	40000	YFKAF97R57	0.55	190
	0.26	5240	27300										
	0.30	4562	27300					1.2	1102	40000	YFK97R57	0.75	185
								1.4	957	40000	YFKF97R57	0.75	205
	0.33	4037	27300	YFK87R57	0.18	120					YFKA97R57	0.75	165
	0.37	3609	27300	YFKF87R57	0.18	130					YFKAF97R57	0.75	190
	0.42	3107	27300	YFKA87R57	0.18	105		1.6	855	40000	YFK97R57	1.1	190
	0.48	2728	27300	YFKAF87R57	0.18	120		1.9	743	40000	YFKF97R57	1.1	210
								2.2	652	40000	YFKA97R57	1.1	170
											YFKAF97R57	1.1	195
	0.55	2371	27300	YFK87R57	0.25	120					YFK97R57	1.5	190
	0.62	2088	27300	YFKF87R57	0.25	130		2.5	573	40000	YFKF97R57	1.5	210
	0.70	1854	27300	YFKA87R57	0.25	105		2.8	504	40000	YFKAF97R57	1.5	170
				YFKAF87R57	0.25	120					YFKAF97R57	1.5	195
	0.83	1657	27300	YFK87R57	0.37	120					YFK97R57	2.2	195
	0.97	1415	27300	YFKF87R57	0.37	130		3.2	437	40000	YFKF97R57	2.2	220
	1.1	1229	27300	YFKA87R57	0.37	110		3.7	382	40000	YFKA97R57	2.2	180
				YFKAF87R57	0.37	120		4.1	342	40000	YFKAF97R57	2.2	205
	1.3	1078	27300	YFK87R57	0.55	120					YFK97R57	3	200
	1.4	951	27300	YFKF87R57	0.55	130		4.6	305	40000	YFKF97R57	3	220
	1.6	837	27300	YFKA87R57	0.55	110		5.4	258	40000	YFKA97R57	3	185
				YFKAF87R57	0.55	125		6.0	232	40000	YFKAF97R57	3	210
	1.9	726	27300	YFK87R57	0.75	125					YFK97R57	4	210
	2.2	638	27300	YFKF87R57	0.75	130		7.1	199	40000	YFKF97R57	4	230
				YFKA87R57	0.75	110					YFKAF97R57	4	190
				YFKAF87R57	0.75	125					YFKAF97R57	4	215
	2.5	562	27300	YFK87R57	1.1	130	8000	0.10	14311	65000	YFKI07R77	0.12	310
	3.0	474	27300	YFKF87R57	1.1	135		0.11	12211	65000	YFKF07R77	0.12	320
	3.3	426	27300	YFKA87R57	1.1	115					YFKA07R77	0.12	285
				YFKAF87R57	1.1	130					YFKAF07R77	0.12	305
	3.8	373	27300	YFK87R57	1.5	130		0.12	10677	65000	YFKI07R77	0.18	310
	4.3	330	27300	YFKF87R57	1.5	140		0.14	9524	65000	YFKF07R77	0.18	325
				YFKA87R57	1.5	120		0.16	8328	65000	YFKA07R77	0.18	280
				YFKAF87R57	1.5	130					YFKAF07R77	0.18	305
	4.8	294	27300	YFK87R57	2.2	135		0.18	7270	65000	YFKI07R77	0.25	310
	5.6	250	27300	YFKF87R57	2.2	145		0.21	6184	65000	YFKF07R77	0.25	320
	6.0	236	27300	YFKA87R57	2.2	125		0.23	5662	65000	YFKA07R77	0.25	285
	7.0	201	27300	YFKAF87R57	2.2	140					YFKAF07R77	0.25	305
4300	0.08	18091	40000	YFK97R57	0.12	180		0.27	5138	65000	YFKI07R77	0.37	310
	0.08	16666	40000	YFKF97R57	0.12	200		0.32	4359	65000	YFKF07R77	0.37	325
	0.09	14897	40000	YFKA97R57	0.12	160		0.36	3810	65000	YFKA07R77	0.37	285
	0.10	13182	40000	YFKAF97R57	0.12	185					YFKAF07R77	0.37	305
	0.12	11677	40000					0.41	3358	65000	YFKI07R77	0.55	315
	0.13	10317	40000					0.46	2977	65000	YFKF07R77	0.55	325
	0.15	9083	40000					0.52	2599	65000	YFKA07R77	0.55	285
	0.17	8054	40000								YFKAF07R77	0.55	310
	0.20	6970	40000					0.60	2286	65000	YFKI07R77	0.75	315
								0.71	1939	65000	YFKF07R77	0.75	325
											YFKA07R77	0.75	285
	0.22	6027	40000	YFK97R57	0.18	180					YFKAF07R77	0.75	310
	0.24	5391	40000	YFKF97R57	0.18	200							
	0.28	4669	40000	YFKA97R57	0.18	160							
	0.32	4082	40000	YFKAF97R57	0.18	185							


输出转矩 output torque Ma N.m	输出转速 output speed na r/min	传动比 Ratio i	径向载荷 Permissible overhung load outoutside Fa N	机型号 Type	功 率 Power kw/lp	重量 weight kg	输出转矩 output torque Ma N.m	输出转速 output speed na r/min	传动比 Ratio i	径向载荷 Permissible overhung load outoutside Fa N	机型号 Type	功 率 Power kw/lp	重量 weight kg
8000	0.82	1713	65000	YFKI07R77	1.1	320	13000	2.3	610	79200	YFKI27R77	4	495
	0.90	1554	65000	YFKFI07R77	1.1	330		2.6	549	79200	YFKFI27R77	4	540
	1.0	1336	65000	YFKA107R77	1.1	290					YFKA127R77	4	470
				YFKAFI07R77	1.1	315					YFKAFI27R77	4	510
	1.2	1166	65000	YFKI07R77	1.5	320		2.7	536	79200	YFKI27R77	5.5	520
	1.4	1030	65000	YFKFI07R77	1.5	330					YFKFI27R77	5.5	570
	1.6	904	65000	YFKA107R77	1.5	290		3.0	473	79200	YFKA127R77	5.5	495
				YFKAFI07R77	1.5	315					YFKAFI27R77	5.5	530
	1.8	793	65000	YFKI07R77	2.2	325		3.4	418	79200	YFKI27R77	7.5	550
	2.0	696	65000	YFKFI07R77	2.2	340					YFKFI27R77	7.5	592
	2.3	615	65000	YFKA107R77	2.2	300		3.9	367	79200	YFKA127R77	7.5	520
				YFKAFI07R77	2.2	325					YFKAFI27R77	7.5	550
	2.7	522	65000	YFKI07R77	3	330	18000	4.3	330	79200	YFKI27R77	0.55	550
	3.0	461	65000	YFKFI07R77	3	340					YFKFI27R77	0.55	600
				YFKA107R77	3	305		5.0	287	79200	YFKA157R97	0.55	530
				YFKAFI07R77	3	325					YFKAFI57R97	0.55	560
	3.5	408	65000	YFKI07R77	4	335		0.08	17679	112200	YFKI57R97	1.1	790
	3.9	364	65000	YFKFI07R77	4	350					YFKFI57R97	1.1	870
				YFKA107R77	4	310		0.09	15729	112200	YFKA157R97	1.1	750
				YFKAFI07R77	4	335					YFKAFI57R97	1.1	810
	4.5	318	65000	YFKI07R77	5.5	345		0.10	13097	112200	YFKI57R97	1.5	800
	5.0	286	65000	YFKFI07R77	5.5	355					YFKFI57R97	1.5	870
	5.7	251	65000	YFKA107R77	5.5	315		0.12	11368	112200	YFKA157R97	1.5	760
				YFKAFI07R77	5.5	340					YFKAFI57R97	1.5	820
13000	0.08	17550	79200	YFKI27R77	0.18	470		0.13	10114	112200	YFKI57R97	2.2	800
	0.08	16006	79200	YFKFI27R77	0.18	510					YFKFI57R97	2.2	880
	0.09	14975	79200	YFKA127R77	0.18	440		0.16	8718	112200	YFKA157R97	2.2	770
	0.11	12440	79200	YFKAFI27R77	0.18	480					YFKAFI57R97	2.2	830
								0.28	5074	112200	YFKI57R97	3	810
	0.12	10915	79200	YFKI27R77	0.25	470					YFKFI57R97	3	880
	0.13	9819	79200	YFKFI27R77	0.25	510		0.31	4514	112200	YFKA157R97	3	770
				YFKA127R77	0.25	440					YFKAFI57R97	3	830
				YFKAFI27R77	0.25	480		0.35	3979	112200	YFKI57R97	4	810
	0.16	8443	79200	YFKI27R77	0.37	470					YFKFI57R97	4	890
	0.18	7482	79200	YFKFI27R77	0.37	510		0.40	3516	112200	YFKA157R97	4	780
	0.21	6565	79200	YFKA127R77	0.37	445					YFKAFI57R97	4	830
				YFKAFI27R77	0.37	480		0.54	2610	112200	YFKI57R97	5.5	820
	0.23	5804	79200	YFKI27R77	0.55	475					YFKFI57R97	5.5	900
	0.27	5027	79200	YFKFI27R77	0.55	520		0.61	2322	112200	YFKA157R97	5.5	780
	0.31	4423	79200	YFKA127R77	0.55	445					YFKAFI57R97	5.5	840
	0.35	3889	79200	YFKAFI27R77	0.55	480		0.70	2029	112200	YFKI57R97	5.5	820
											YFKFI57R97	5.5	900
	0.42	3311	79200	YFKI27R77	0.75	475		0.78	1805	112200	YFKA157R97	5.5	780
	0.46	3009	79200	YFKFI27R77	0.75	520					YFKAFI57R97	5.5	840
				YFKA127R77	0.75	445		0.85	1659	112200	YFKI57R97	5.5	820
				YFKAFI27R77	0.75	485					YFKFI57R97	5.5	900
	0.54	2607	79200	YFKI27R77	1.1	480		1.0	1365	112200	YFKA157R97	5.5	780
	0.62	2268	79200	YFKFI27R77	1.1	520					YFKAFI57R97	5.5	840
	0.73	1926	79200	YFKA127R77	1.1	450		1.1	1229	112200	YFKI57R97	5.5	820
				YFKAFI27R77	1.1	490					YFKFI57R97	5.5	900
	0.80	1757	79200	YFKI27R77	1.5	480		1.3	1093	112200	YFKA157R97	5.5	780
	0.91	1541	79200	YFKFI27R77	1.5	520					YFKAFI57R97	5.5	840
				YFKA127R77	1.5	450		1.5	942	112200	YFKI57R97	5.5	820
				YFKAFI27R77	1.5	490					YFKFI57R97	5.5	900
	1.0	1342	79200	YFKI27R77	2.2	485		1.7	854	112200	YFKA157R97	5.5	780
	1.2	1177	79200	YFKFI27R77	2.2	530					YFKAFI57R97	5.5	840
	1.4	1025	79200	YFKA127R77	2.2	460		1.9	756	112200	YFKI57R97	5.5	820
				YFKAFI27R77	2.2	495					YFKFI57R97	5.5	900
	1.6	899	79200	YFKI27R77	3	490		2.2	661	112200	YFKA157R97	5.5	780
	1.8	790	79200	YFKFI27R77	3	530					YFKAFI57R97	5.5	840
	2.0	704	79200	YFKA127R77	3	465		2.5	567	112200	YFKI57R97	5.5	820
				YFKAFI27R77	3	500					YFKFI57R97	5.5	900

输出转矩 output torque Ma N.m	输出转速 output speed na r/min	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	机型号 Type	功 率 Power kw/4p	重量 weight kg	输出转矩 output torque Ma N.m	输出转速 output speed na r/min	传动比 Ratio i	径向载荷 Permissible overhung load outputside Fa N	机型号 Type	功 率 Power kw/4p	重量 weight kg
18000	2.8	504	112200	YFKI57R97	7.5	840	32000	6.9	213	150000	YFKI67RI07	30	1450
	3.3	434	112200	YFKFI57R97	7.5	920		7.1	206	150000			
	3.8	379	112200	YFKA157R97	7.5	800		8.1	180	150000	YFKA167RI07	30	1450
	4.3	333	112200	YFKAF157R97	7.5	860							
								9.2	160	150000	YFKI87R97	37	1500
	4.9	291	112200	YFKI57R97	11	850					YFKA187R97	37	1500
				YFKFI57R97	11	930							
				YFKA157R97	11	820		11	135	150000	YFKI87R97	45	1530
				YFKAF157R97	11	870		12	118	150000			
	4.8	299	112200	YFKI57RI07	11	900					YFKA187R97	45	1530
				YFKFI57RI07	11	980	50000	0.04	32625	189900	YFKI87R97	0.55	1760
				YFKA157RI07	11	860		0.05	27165	189900			
				YFKAF157RI07	11	920		0.06	24353	189900	YFKA187R97	0.55	1760
	5.8	253	112200	YFKI57RI07	15	940		0.07	19144	189900			
	6.3	230	112200	YFKFI57RI07	15	1020		0.08	16978	189900			
	6.9	213	112200	YFKA157RI07	15	900							
				YFKAF157RI07	15	960		0.10	14272	189900	YFKI87R97	0.75	1770
	32000				YFKI67R97	0.55	1180		0.11	13116	189900		
0.07		19723	150000				0.12	11647	189900	YFKA187R97	0.75	1770	
0.08		17406	150000										
0.09		15000	150000	YFKA167R97	0.55	1180		0.13	10413	189900	YFKI87R97	1.1	1770
0.10		13238	150000				0.15	9363	189900				
0.12		11573	150000				0.17	8126	189900	YFKA187R97	1.1	1770	
0.13		10264	150000										
							0.19	7343	189900	YFKI87R97	1.5	1770	
0.16		8628	150000	YFKI67R97	0.75	1180		0.21	6747	189900			
				YFKA167R97	0.75	1180		0.24	5991	189900	YFKA187R97	1.5	1770
							0.26	5358	189900	YFKI87R97	2.2	1780	
0.21		8562	150000	YFKI67R97	1.1	1190		0.29	4817	189900			
0.26		5355	150000				0.32	4370	189900	YFKA187R97	2.2	1780	
				YFKA167R97	1.1	1190		0.39	3609	189900	YFKI87R97	3	1780
							0.46	3062	189900				
0.29		4788	150000	YFKI67R97	1.5	1190					YFKA187R97	3	1780
0.35		4079	150000				0.56	2519	189900	YFKI87R97	4	1790	
				YFKA167R97	1.5	1190		0.63	2268	189900			
							0.69	2054	189900	YFKA187R97	4	1790	
0.42		3376	150000	YFKI67R97	2.2	1200							
0.51		2755	150000				0.79	1821	189900	YFKI87R97	5.5	1790	
				YFKA167R97	2.2	1200		0.87	1605	189900			
											YFKA187R97	5.5	1790
0.62		2263	150000	YFKI67R97	3	1200		1.0	1395	189900	YFKI87R97	7.5	1810
0.64		2182	150000					1.2	1196	189900			
				YFKA167R97	3	1200					YFKA187R97	7.5	1810
0.83		1704	150000	YFKI67R97	4	1210		2.0	738	189900	YFKI87R97	15	1870
1.0		1408	150000					2.3	621	189900			
				YFKA167R97	4	1210					YFKA187R97	15	1870
								2.8	527	189900	YFKI87R97	18.5	1920
1.1		1296	150000	YFKI67R97	5.5	1210							
1.3		1101	150000								YFKA187R97	18.5	1920
				YFKA167R97	5.5	1210							
								1.7	835	189900	YFKI87R97	11	1870
1.5		944	150000	YFKI67R97	7.5	1230					YFKA187R97	11	1870
1.7		843	150000										
1.9		757	150000	YFKA167R97	7.5	1230		2.0	729	189900	YFKI87R97	15	1920
								2.3	622	189900			
2.6		561	150000	YFKI67R97	11	1250					YFKA187R97	15	1920
3.0		481	150000					2.8	520	189900	YFKI87R97	18.5	1970
				YFKA167R97	11	1250		3.2	454	189900			
											YFKA187R97	18.5	1970
3.5		423	150000	YFKI67R97	15	1290							
4.0		369	150000					4.1	355	189900	YFKI87R97	30	2030
				YFKA167R97	15	1290							
											YFKA187R97	30	2030
4.6		318	150000	YFKI67RI07	18.5	1380							
								5.6	261	189900	YFKI87R97	37	2080
				YFKA167RI07	18.5	1380					YFKA187R97	37	2080
5.3		278	150000	YFKI67RI07	22	1400		6.6	221	189900	YFKI87R97	45	2110
6.0		244	150000					7.6	193	189900			
				YFKA167RI07	22	1400		9.0	163	189900	YFKA187R97	45	2110



YFK37

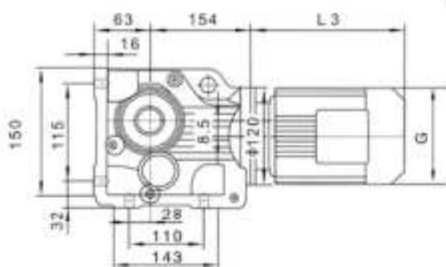


YFKA37B





YFKA37

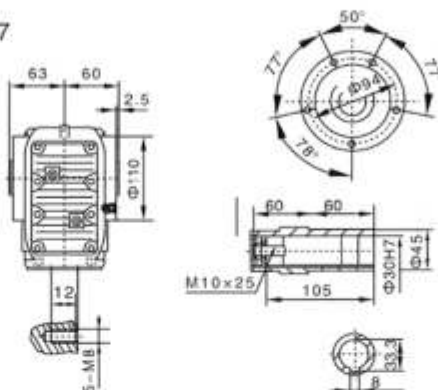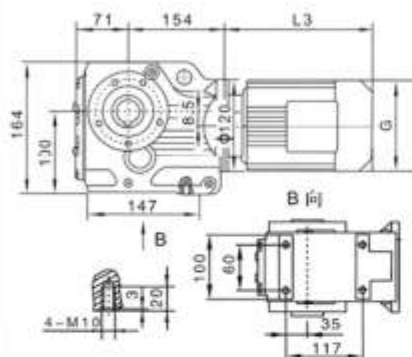


YFKAZ37







YFKF37

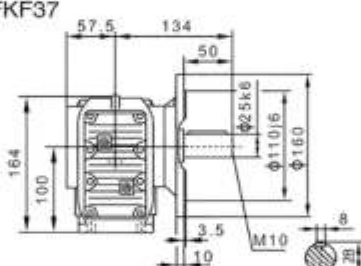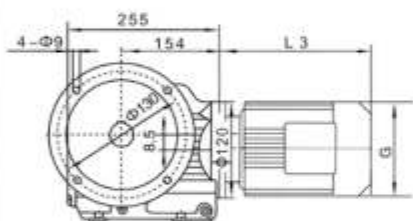


YFKAF37




YFKA37/T




电机需方配或配特殊电机时需加联接法兰



YFK..S37

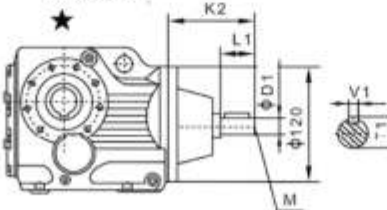

YFK..37R17

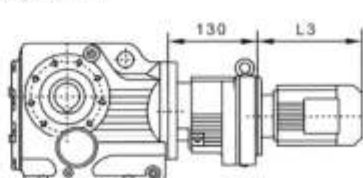

注: 其余尺寸见相对应结构形式

Note: For other values please refer to the opposite structure.



When equipping the user's motor or the special one, the flange is required to be connected.

Y2电机座号 Motor size	63	71	80	90S	90L	100					
功率/4P Power/(kW)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0					
L3	235	250	293	308	333	347					
G	130	145	175	195	195	215					
L2	70	68	78.5	78.5	78.5	90					


注: 1. YFKA, YFKF, YFKAF, YFKAZ壳体为通用件, 安装尺寸均可相互参照。 2. * YFK..* 表示 YFK, YFKA, YFKF, YFKAF, YFKAZ, YFKAB。
Note: 1. The housings of YFKA, YFKF, YFKAF, YFKAZ are common parts. The mounting dimensions may consult each other.
2. * YFK..* mean YFK, YFKA, YFKF, YFKAF, YFKAZ, YFKAB.

★ 查表: 15 Seetable: 15 查表: 15: i=34-106.5 查AD1 i=5.3-34 查AD2




YFK47

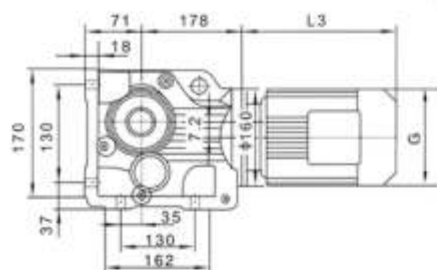


YFKA47B





YFKA47

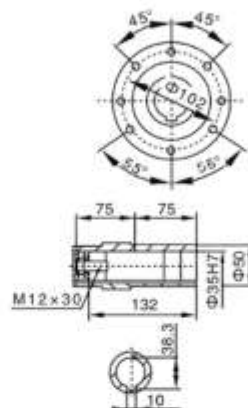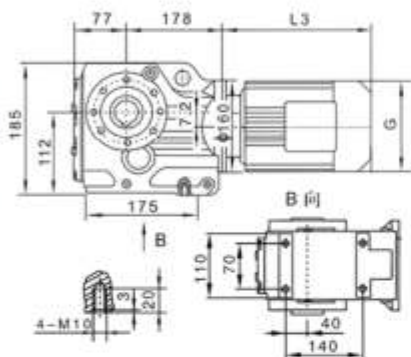


YFKAZ47





YFKF47

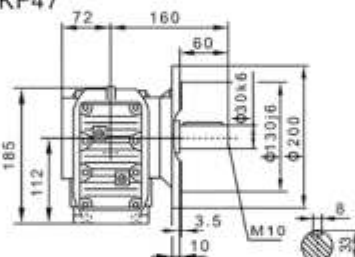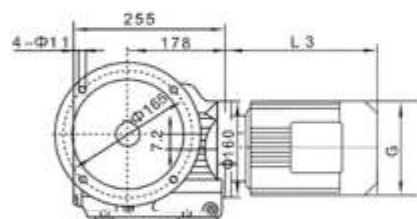



YFKAF47




YFKA47/T




防转臂C面安装
C side of torque-arm




电机需方配或配特殊电机时
需加联接法兰



YFK..S47



YFK..47R37

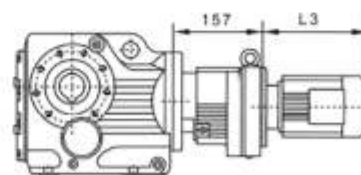

注: 其余尺寸见
相对应结构
形式

Note: For other
values please
refer to the o-
pposited stru-
cture.



When equipping the user's motor or the special
one, the flange is required to be connected.

Y2电机机座号 Motor size	63	71	80	90S	90L	100				
功率(kW) Power(kW)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0				
L3	223	244	293	304	329	357				
G	130	145	175	195	195	215				
L2	70	84	85	85	85	91				


注: 1. YFKA, YFKF, YFKAF, YFKAZ壳体为通用件, 安装尺寸均可相互参照。 2. YFK.. 表示 YFK, YFKA, YFKF, YFKAF, YFKAZ, YFKAB。
Note: 1. The housings of YFKA, YFKF, YFKAF, YFKAZ are common parts. The mounting dimensions may consult each other.
2. YFK.. mean YFK, YFKA, YFKF, YFKAF, YFKAZ, YFKAB.

★ 查表: 15 Seetable; 15 查表; i=9-132 查 AD2 i=5.8-9 查 AD3




YFK57

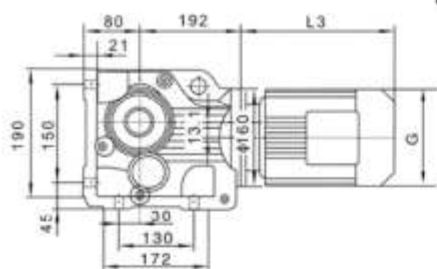


YFKA57B





YFKA57

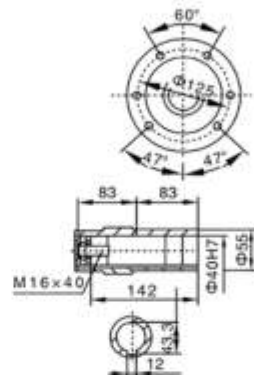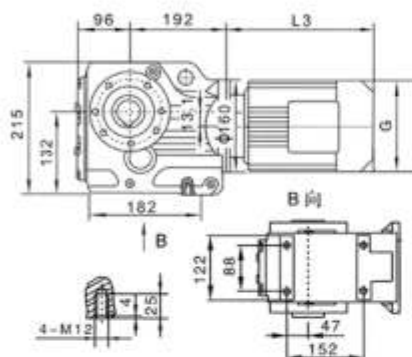


YFKAZ57





YFKF57

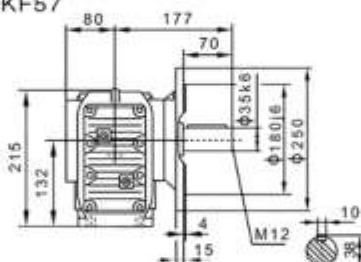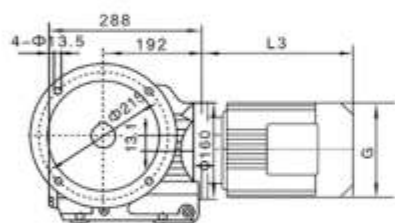



YFKAF57



YFKA57/T




防转臂C面安装
C side of torque-arm




防转臂D面安装
D side of torque-arm


电机需方配或配特殊电机时
需加联接法兰



YFK..S57

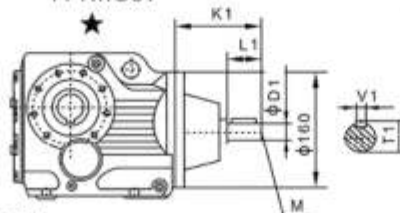

YFK.,57R37

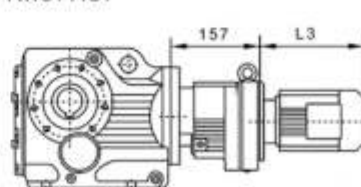

注: 其余尺寸见
相对应结构
形式

Note: For other values please refer to the opposed structure.

When equipping the user's motor or the special one, the flange is required to be connected.



Y2电机座号 Motor size	63	71		80	90S	90L	100		112M	132S		
功率/4P Power/(kW)	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3.0	4.0	5.5	
L3	223	244		293		304	329		357	383	428	
G	130	145		175		195	195		215	240	275	
L2	70	84		85		85	85		91	91	112	

注:1. YFKA、YKFK、YFKAF、YFKAZ壳体为通用件,安装尺寸均可相互参照。 2. *YFK*表示YFK、YFKA、YKFK、YFKAF、YFKAZ、YFKAB。
Note:1. The housings of YFKA、YKFK、YFKAF、YFKAZ are common parts. The mounting dimensions may consult each other.


2. YFK, * mean YFK, YFKA, YFKE, YFKAZ, YFKAB

★查表: 15 Seetable:15 查表15: i=16-145.2查AD2 i=6.5-16查AD3




YFK67

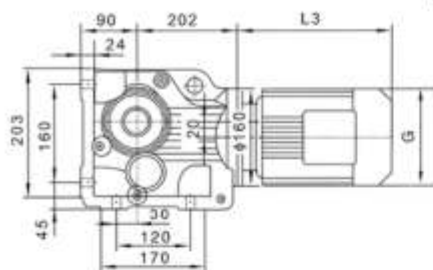


YFKA67B





YFKA67

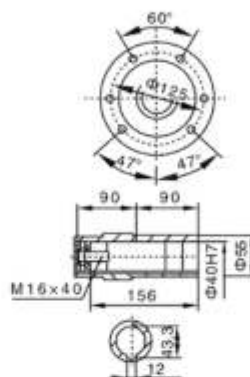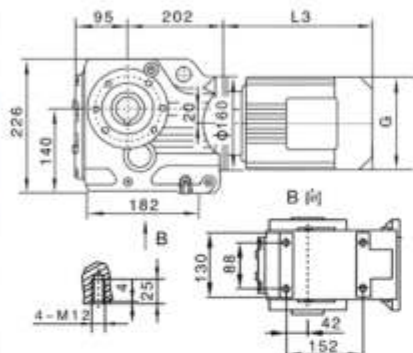


YFKAZ67





YFKF67

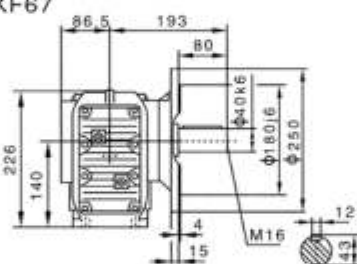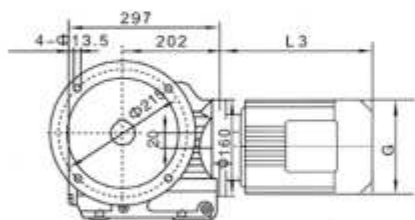



YFKAF67



YFKA67/T




防转臂C面安装
C side of torque-arm




防转臂D面安装
D side of torque-arm


电机需方配或配特殊电机时
需加联接法兰



YFK..S67

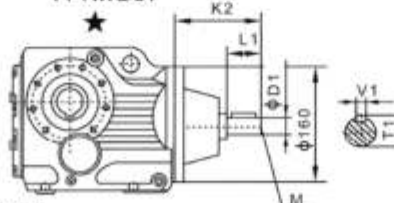

YFK..67R37

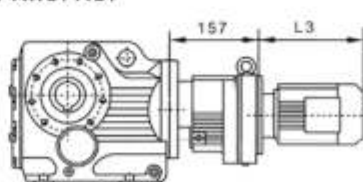

注: 其余尺寸见
相对应结构
形式

Note: For other values please refer to the opposite structure.

When equipping the user's motor or the special one, the flange is required to be connected.



Y2电机座号 Motor size	63	71	80	90S	90L	100	112M	132S		
功率/4P Power/(kW)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5		
L3	223	244	293	304	329	357	383	428		
G	130	145	175	195	195	215	240	275		
L2	70	84	85	85	85	91	91	112		

Note: 1. The housings of YFKA, YFKF, YFKAF, YFKAZ are common parts. The mounting dimensions may consult each other.


2. * YFK, * mean YFK, YFKA, YFKE, YFKAZ, YFKAB.

★查表: 15 Seetable:15 查表15: i=35-145查AD2 i=7.2-35查AD3




YFK77

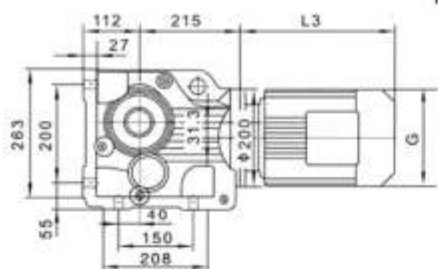


YFKA77B





YFKA77

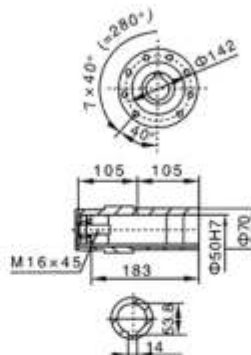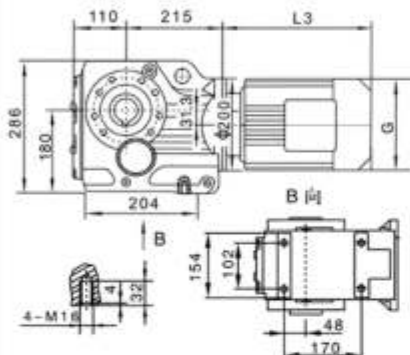


YFKAZ77







YFKF77

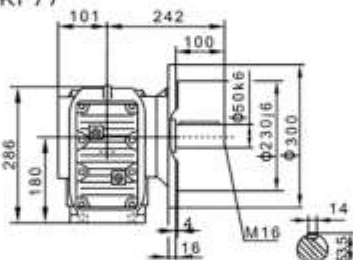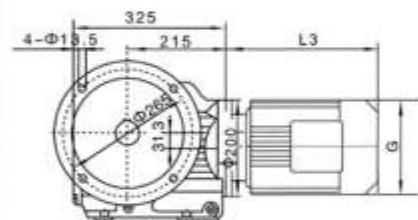


YFKAF77




YFKA77/T




电机需方配或配特殊电机时
需加联接法兰



YFK..S77

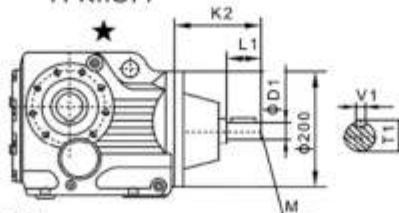

YFK..77R37

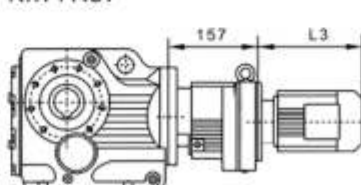

注: 其余尺寸见
相对应结构
形式

Note: For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one, the flange is required to be connected.

Y2电机机座号 Motor size	71	80	90S	90L	100	112M	132S	132M	160M
功率/kW Power/(kW)	0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5	7.5	11
L3	237	292	297	322	354	391	430	463	555
G	145	175	195	195	215	240	275	275	330
L2	84	95	95	95	95	95	117	117	155



注: 1. YFKA, YFKF, YFKAF, YFKAZ表体为通用件, 安装尺寸均可相互参照。 2. "YFK.."表示YFK, YFKA, YFKF, YFKAF, YFKAZ, YFKAB.

Note: 1. The housings of YFKA, YFKF, YFKAF, YFKAZ are common parts. The mounting dimensions may consult each other.


2. "YFK.." mean YFK, YFKA, YFKF, YFKAF, YFKAZ, YFKAB.

★查表: 15 Seetable: 15 查表15: i=43-192查AD2 i=30-43查AD3 i=7.2-30查AD4




YFK87

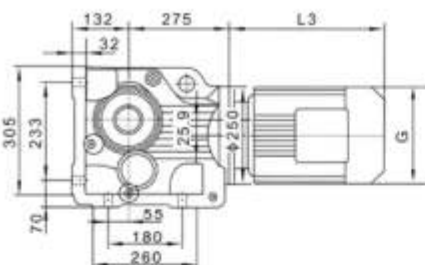


YFKA87B





YFKA87

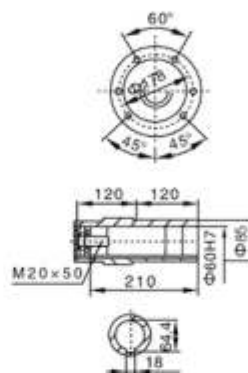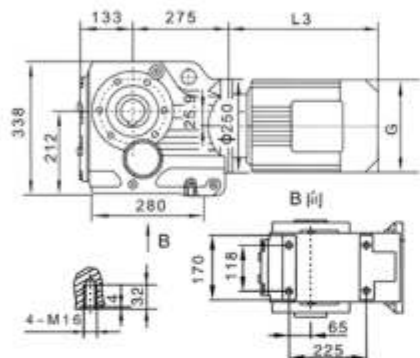


YFKAZ87





YFKF87

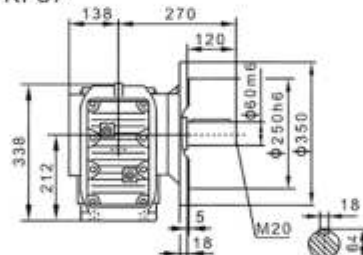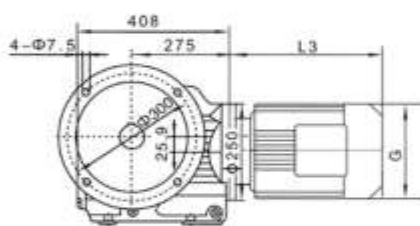



YFKAF87



YFKA87/T




防转臂C面安装
C side of torque-arm




防转臂D面安装
D side of torque-arm


电机需方配或配特殊电机时
需加联接法兰



YFK..S87



YFK..87R57

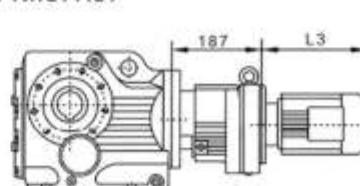

注: 其余尺寸见
相对应结构
形式

Note: For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one, the flange is required to be connected.

Y2电机机座号 Motor size	80	90S	90L	100	112M	132S	132M	160M	160L	180M	180L
功率/4P Power/(kW)	0.75	1.1	1.5	2.2	3.0	4.0	5.5	7.5	11	15	22
L3	261	284	309	351	371	417	450	538	583	612	652
G	175	195	195	215	240	275	275	330	330	380	380
L2	95	95	95	95	95	117	117	155	155	155	155



注: 1. YFKA, YFKF, YFKAF, YFKAZ 类体为通用件, 安装尺寸均可相互参照。 2. 'YFK..' 表示 YFK, YFKA, YFKF, YFKAF, YFKAZ, YFKAB。

Note: 1. The housings of YFKA, YFKF, YFKAF, YFKAZ are common parts. The mounting dimensions may consult each other.


2. 'YFK..' mean YFK, YFKA, YFKF, YFKAF, YFKAZ, YFKAB.

★ 查表: 15 See table: 15 查表: 15: i=84-197.4 查表: 2 i=33-84 查表: 3 i=11-33 查表: 4 i=7.2-11 查表: 5




YFK97

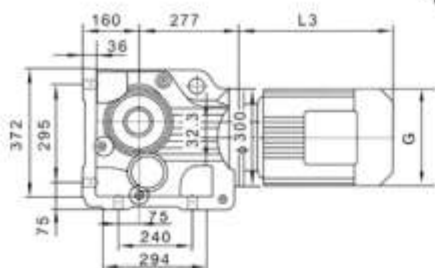


YFKA97B





YFKA97

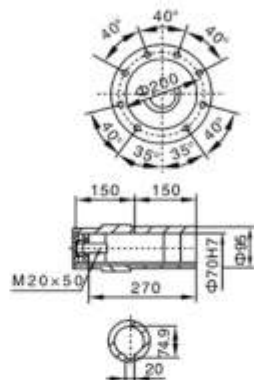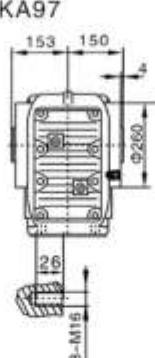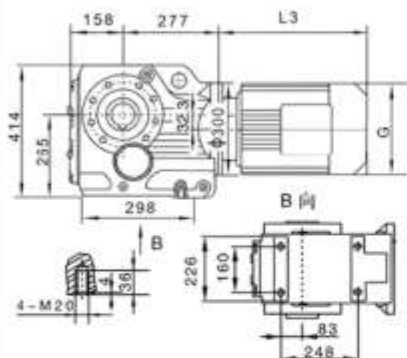


YFKAZ97







YFKF97

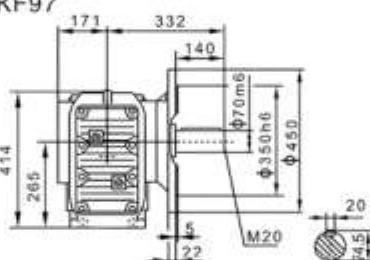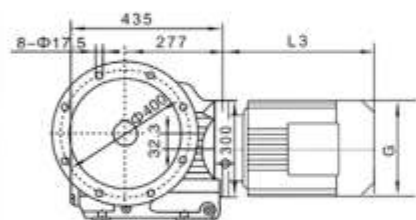


YFKAF97




YFKA97/T




电机需方配或配特殊电机时
需加联接法兰



YFK..S97



YFK..97R57

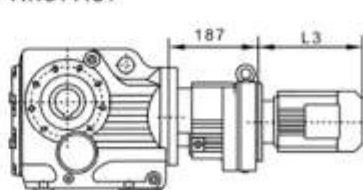

注: 其余尺寸见
植对应结构
形式

Note: For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one, the flange is required to be connected.

Y2电机座号 Motor size	90S	90L	100		112M	132S	132M	160M	160L	180M	180L	200L
功率/4P Power/(kW)	1.1	1.5	2.2	3.0	4.0	5.5	7.5	11	15	18.5	22	30
L3	276	301	322		342	411	444	529	574	593	633	670
G	195	195	215		240	275	275	330	330	380	380	420
L2	95	95	95		95	117	117	155	155	155	155	160



注1: YFKA, YFKF, YFKAF, YFKAZ表体为通用件, 安装尺寸均可相互参照。 2. "YFK.."表示YFK, YFKA, YFKF, YFKAF, YFKAZ, YFKAB.

Note: 1. The housings of YFKA, YFKF, YFKAF, YFKAZ are common parts. The mounting dimensions may consult each other.


2. "YFK.." mean YFK, YFKA, YFKF, YFKAF, YFKAZ, YFKAB.

★查表: 15 Seetable: 15 查表15: i=67-176.1查AD3 i=40-67查AD4 i=14-40查AD5 i=8.7-14查AD6




YFK107

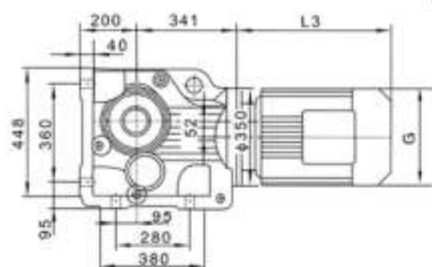


YFKA107B





YFKA107

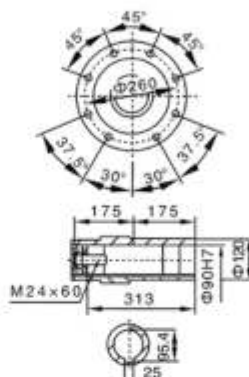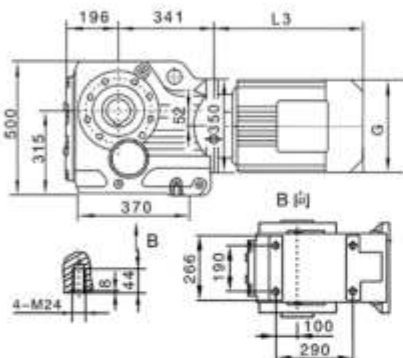


YFKAZ107






YFKF107

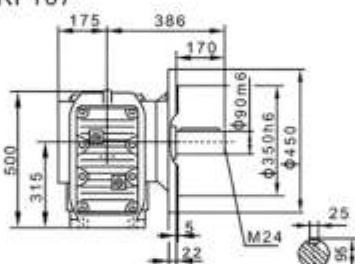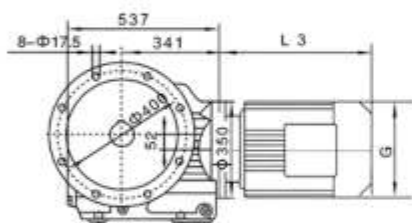


YFKAF107




YFKA107/T




电机需方配或配特殊电机时
需加联接法兰



YFK..S107

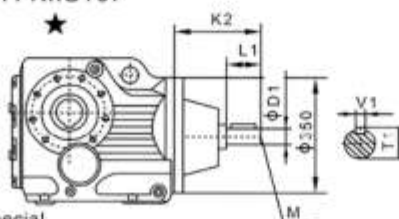

YFK..107R77

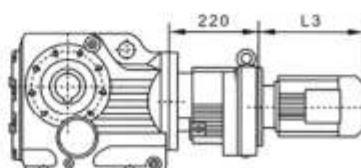

注: 其余尺寸见
相对应结构
形式

Note: For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one, the flange is required to be connected.

Y2电机机座号 Motor size	100	112M	132S	132M	160M	160L	180M	180L	200L	225S	225M
功率/(kW) Power/(kW)	3.0	4.0	5.5	7.5	11	15	18.5	22	30	37	45
L3	325	342	397	430	518	563	593	632	670	684	709
G	215	240	275	275	330	330	380	380	420	470	470
L2	95	95	117	117	155	155	155	155	160	190	190



注: 1. YFKA, YFKF, YFKAF, YFKAZ壳体为通用件, 安装尺寸均可相互参照。 2. YFK.. 表示YFK, YFKA, YFKF, YFKAF, YFKAZ, YFKAB.

Note: 1. The housings of YFKA, YFKF, YFKAF, YFKAZ are common parts. The mounting dimensions may consult each other.


2. YFK.. mean YFK, YFKA, YFKF, YFKAF, YFKAZ, YFKAB.

★查表: 15 Seetable: 15 查表15: i=47~143.5查AD4 i=30~47查AD5 i=8.6~30查AD6


YFK127
YFKA127

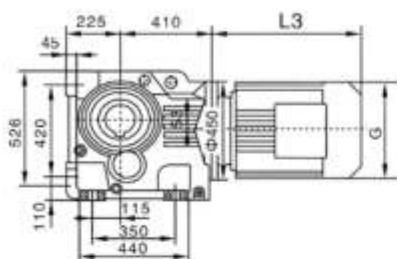


YFKA127B
YFKA127





YFKAZ127




YFKA127B/YFKAZ127/YFKAF127/YFKAZ127
空心轴/Hollow shaft





YFKF127

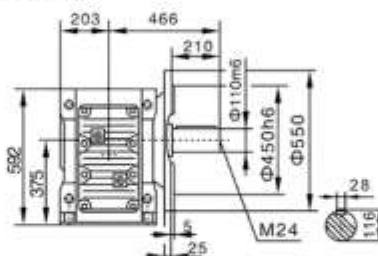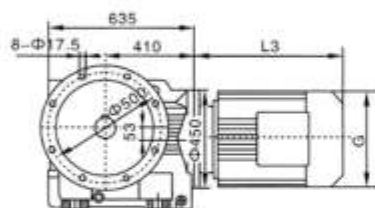



YFKAF127



YFKA127/T




防转臂C面安装
C side of torque-arm




防转臂D面安装
D side of torque-arm


电机需方配或配特殊电机时
需加联接法兰



YFK..S127

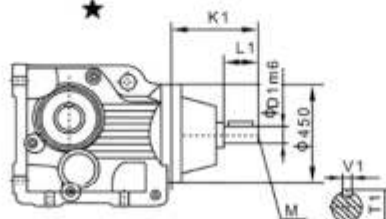

YFK..127R77 (87)

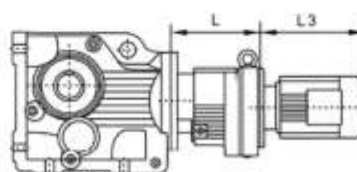

注: 其余尺寸见
相对应结构
形式

Note: For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one, the flange is required to be connected.

Y2电机型号 Motor size	132M	160M	160L	180M	180L	200L	225S	225M	250M	280S	280M
功率/4P Power/(kW)	7.5	11	15	18.5	22	30	37	45	55	75	90
L3	429	490	583	693	633	658	678	703	784	847	847
G	275	330	330	380	380	420	470	470	510	580	580
L2	55	93	93	93	93	93	115	115	120	120	120



注: 1. YFKA, YFKF, YFKAF, YFKAZ壳体为通用件, 安装尺寸均可相互参照。 2. "YFK.."表示YFK, YFKA, YFKF, YFKAF, YFKAZ, YFKAB.

Note: 1. The housings of YFKA, YFKF, YFKAF, YFKAZ are common parts. The mounting dimensions may consult each other.


2. "YFK.." mean YFK, YFKA, YFKF, YFKAF, YFKAZ, YFKAB.

★查表: 15 Seetable: 15 查表15: i=105-146.1查AD4 i=47-105查AD5 i=38-47查AD6 i=23-38查AD7 i=8.6-23查AD8


YFK157
YFKA157

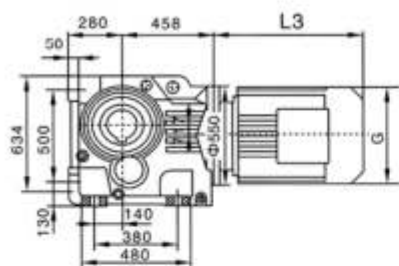


YFKA157
YFKA157B





YFKAZ157




YFKAZ157/YFKAF157/YFKAZ157
空心轴/Hollow shaft





YFKF157

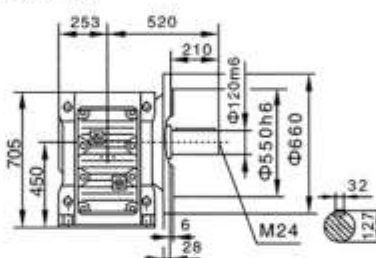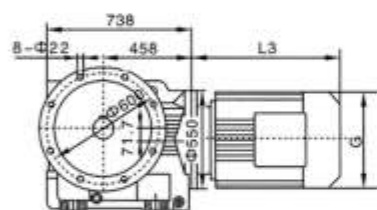



YFKAF157



YFKA157/T




防轉臂C面安裝
C side of torque-arm




防转臂D面安装
D side of torque-arm


电机需方配或配特殊电机时
需加联接法兰



YFK..S157

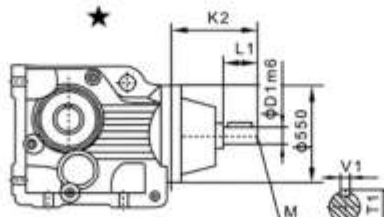

YFK..157R97(R107)

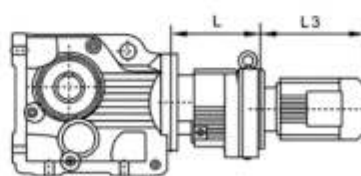

注:其余尺寸见
相对应结构
形式

Note: For other valude please refer to the opposited structure.

When equipping the user's motor or the special one, the flange is required to be connected.


Y2电机机座号 Motor size 功率/4P Power(kw)	160M	160L	180M	180L	200L	225S	225M	250M	280S	280M	315S	315M	315L
L3	492	537	593	633	646	673	698	779	847	847	1100	1180	1270
G	330	330	380	380	420	470	470	510	580	580	645	645	645
L2	155	155	155	155	160	190	190	190	190	190	190	190	190

Note: 1. The housings of YFKA, YFKF, YFKAF, YFKAZ are common parts. The mounting dimensions may consult each other.


2: YFK, * mean YFK, YFKA, YFKE, YFKAf, YFKAZ, YFKAB.

★查表: 15 Seetable:15查表15: i=61~150.5查AD5 i=50~61查AD6 i=35~50查AD7 i=12~35查AD8

YFK167


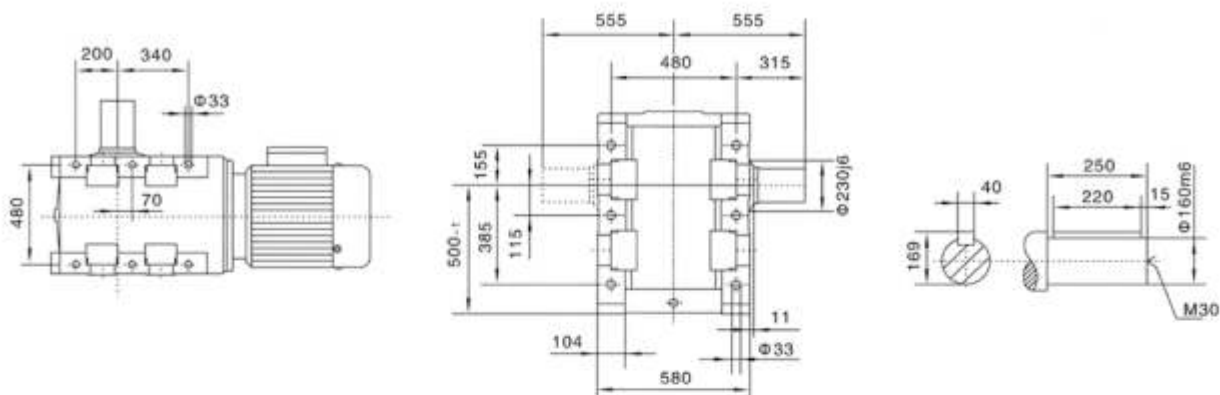


YFKA167

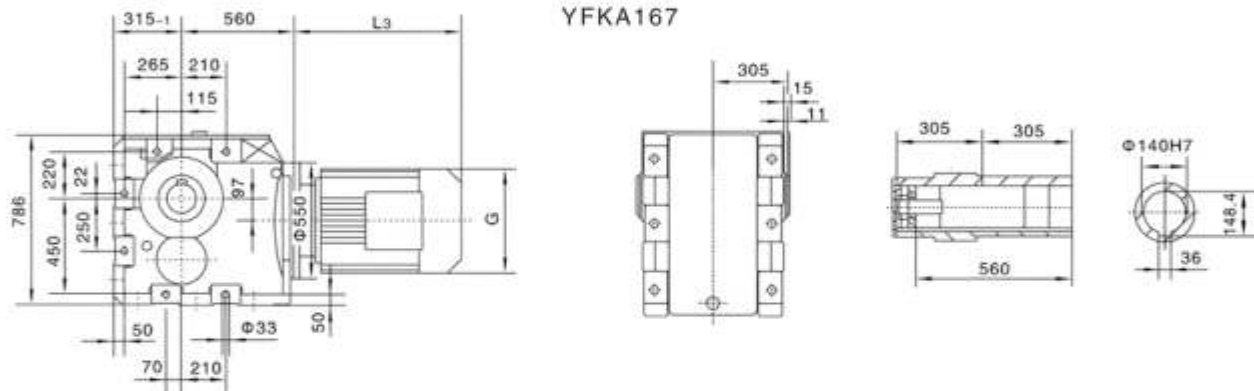


电机需方配或配特殊电机时
需加联接法兰

YFK..S167

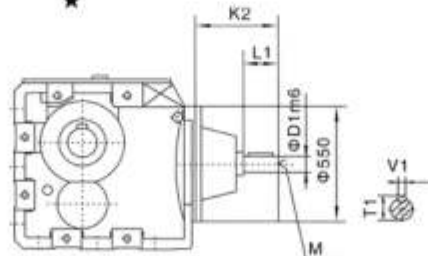

YFK..167R97(R107)

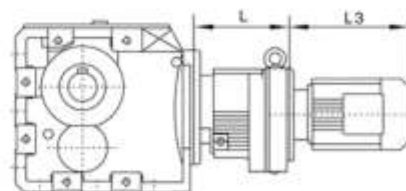

When equipping the user's motor or the special one, the flange is required to be connected.

注:其余尺寸见相对应结构形式

Note: For other values please refer to the opposed structure.

Y2电机座号 Motor size	YFK.. 167R97									YFK.. 167R107			
	160M	160L	180M	180L	200L	225S	225M	250M	280S	280M	315S	315M	315L
功率/4P Power/(kW)	11	15	18.5	22	30	37	45	55	75	90	110	132	160 200
L3	492	537	593	633	646	673	698	779	847	847	1100	1180	1270
G	330	330	380	380	420	470	470	510	580	580	645	645	645
L2	155	155	155	155	160	190	190	190	190	190	190	190	190


注:1.YFKA, YFKF, YFKAF, YFKAZ壳体为通用件,安装尺寸均可相互参照。 2.* YFK.. 表示YFK, YFKA, YFKF, YFKAF, YFKAZ, YFKAB.

Note:1.The housings of YFKA, YFKF, YFKAF, YFKAZ are common parts. The mounting dimensions may consult each other.


2.* YFK.. * mean YFK, YFKA, YFKF, YFKAF, YFKAZ, YFKAB.

★ 查表: 15 Seetable: 15 查表15: i=135-164.5查AD5 i=102-135 查AD6 i=57-102查AD7 i=17.3-57查AD8

YFK187


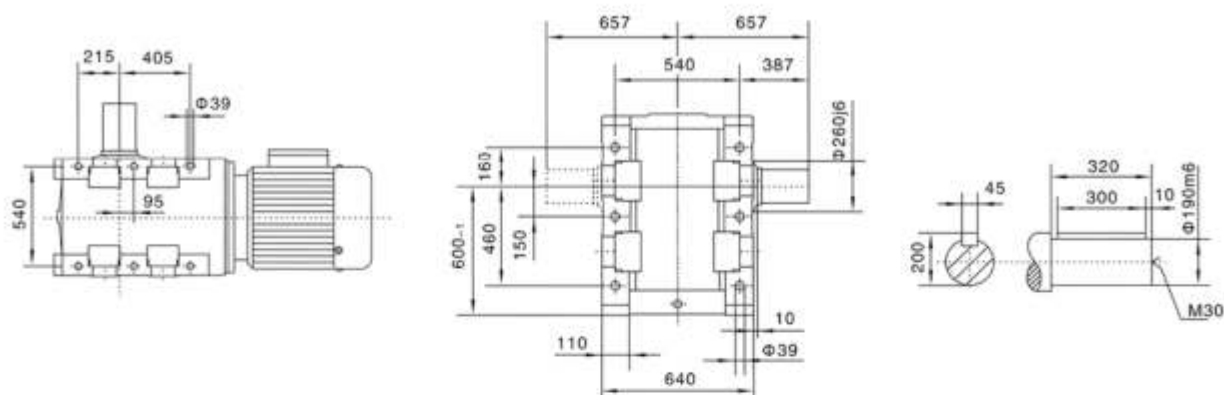


YFKA187

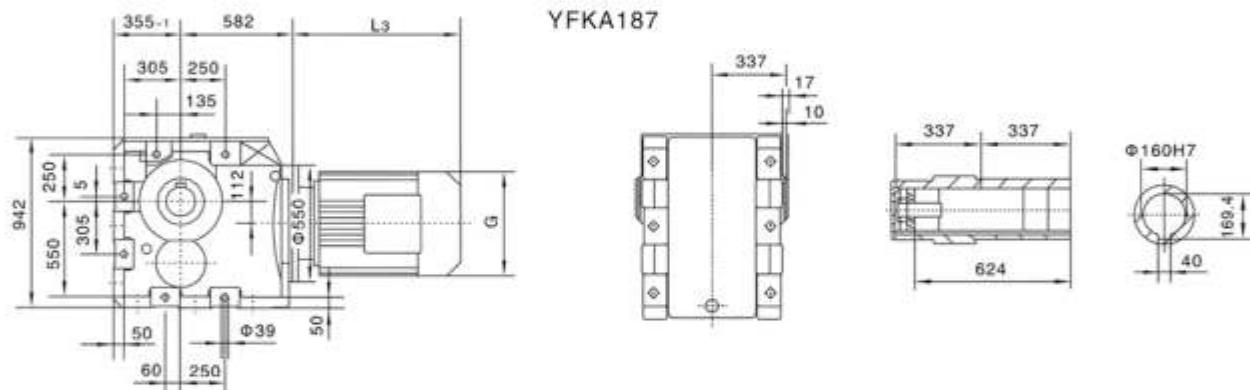


电机需方配或配特殊电机时
需加联接法兰

YFK...S187

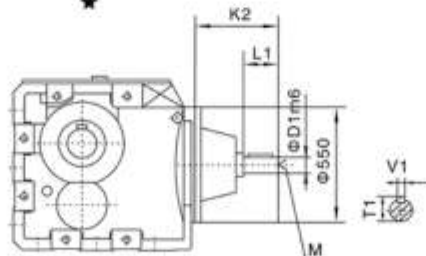

YFK...187R97(107)

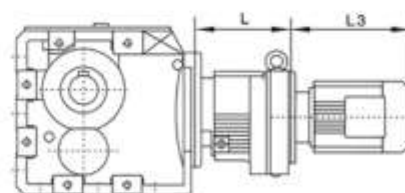

When equipping the user's motor or the special one, the flange is required to be connected.

注:其余尺寸见相对应结构形式

Note: For other values please refer to the opposed structure.

Y2电机型号 Motor size	160M	160L	180M	180L	200L	225S	225M	250M	280S	YFK... 187R97		YFK... 187R107	
										L	320	355	
功率/4P Power/(kW)	11	15	18.5	22	30	37	45	55	75	90	110	132	160
L3	492	537	593	633	646	673	698	779	847	847	1100	1180	1270
G	330	330	380	380	420	470	470	510	580	580	645	645	645
L2	155	155	155	155	160	190	190	190	190	190	190	190	190

注:1.YFKA、YFKF、YFKAF、YFKAZ壳体为通用件,安装尺寸均可相互参照。 2."YFK..."表示YFK、YFKA、YFKF、YFKAF、YFKAZ、YFKAB。

Note:1.The housings of YFKA、YFKF、YFKAF、YFKAZ are common parts. The mounting dimensions may consult each other.

2."YFK..." mean YFK、YFKA、YFKF、YFKAF、YFKAZ、YFKAB.

★查表: 15. Seetable: 15 查表15: i=141~179.9查AD6 i=98~141查AD7 i=17.1~98查AD8